

Our BASIC led profile series for recessing is manufactured in high purity aluminium and available in anodised silver, lacquered white and raw aluminium (on demand, we can supply different anodised and lacquered finishings). Ideal for embedding in furniture, shelves and similar.

Suitable for led strips with a maximum width of 14mm and a power not greater than 15W/m, as there is no ventilation when embedded in wooden surfaces. We recommend using it with our Canovelles-Barcelona-Gomera-COB ecoled strips.


We offer a 2 year guarantee on our profiles and covers.



Scale 1:1



Scale 1:2

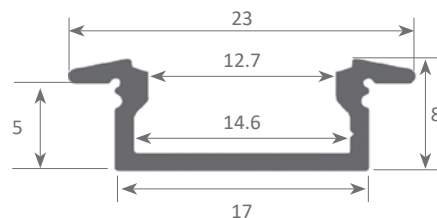

Aluminium profile

03.005	anodised silver	2m
03.006	white lacquered	2m
03.007	raw	2m
03.008	anodised silver	6m
03.009	white lacquered	6m
03.010	raw	6m



Methacrylate cover

18.014	transparent	2m
18.015	frosted	2m
18.018	opal	3m
18.016	transparent	6m
18.017	frosted	6m



Plastic endcaps

19.051	white with hole
19.052	white without hole
19.053	grey with hole
19.054	grey without hole

* California's endcaps can also be used



90° angle bracket

22.001	steel (52x13mm)
--------	-----------------



Clip

20.005	transparent plastic
--------	---------------------



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.127kg / Alloy: 6063 / Perimeter: 79mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)