

Our new ELITE series represents a “before and after” in the understanding of flexible led strips.

Up to now, depending on the power and luminosity of the strip, we would use a different quantity of leds, meaning a different cutting length and often different voltages (12V - 24V). We could also see differences in the type of led (SMD3528 - SMD2835 - SMD5050, etc...).


However our new ELITE series (with high quality SAMSUNG led) offers a brightness uniformity unseen so far on the market, where all the parameters remain the same even if power and luminosity vary.

We would like to highlight that the ELITE 5 model is the only led strip on the market which, apart from offering only 5W/m, gives a totally dot free effect with conventional led profiles.


The ELITE 15 model is available also in the additional warm tones: 2100°K - 2400°K - 2700°K.

- One led: 2835 SMD **SAMSUNG**
- The same quantity of leds: 140 leds/metre
- The same cutting length: 50mm / every 7 leds
- The same voltage: 24V


ELITE 5 5W Medium luminosity flexible strip, 24V. Can be cut every 7 leds.




ELITE 10 10W Medium luminosity flexible strip, 24V. Can be cut every 7 leds.




ELITE 15 15W Medium luminosity flexible strip, 24V. Can be cut every 7 leds.



ELITE 20 20W Medium luminosity flexible strip, 24V. Can be cut every 7 leds.



ELITE 5

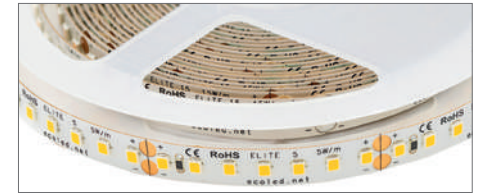

Ref: 31.005 6500°K
 Ref: 31.006 4000°K
 Ref: 31.007 3000°K

Single-coloured flexible strip **ELITE**
 IP20 with 140 leds/metre 2835SMD.

10mm PCB.

Requires use with led profile to permit dissipation.

Heat dissipation tape included.

CRI >80.

Daily recommended use: 18h

Maximum connection in open circuit: 12m

Maximum connection in closed circuit: 20m

Power (W)	5W/m
Voltage (V)	24V
Led type	SMD2835
Lumens (6500°K)	700 Lm/m
Lumens (4000°K)	705 Lm/m
Lumens (3000°K)	680 Lm/m
Light emission	120°
Waterproofing	IP20
N° leds/m	140
Measurements	5000x10x1.2mm
Cutable	every 50mm
PCB	10mm
Working temperature	-40°C / +60°C
Apt for	indoor
Packaging	1 roll/5m
Guarantee	3 years

4

POWERS

MAXIMUM

UNIFORMITY

ELITE 10



Ref: 31.008 6500°K
 Ref: 31.009 4000°K
 Ref: 31.010 3000°K

Single-coloured flexible strip **ELITE**
 IP20 with 140 leds/metre 2835SMD.
10mm PCB.

Requires use with led profile to permit dissipation.

Heat dissipation tape included.

CRI >80.


Daily recommended use: 18h

Maximum connection in open circuit: 10m

Maximum connection in closed circuit: 18m

Power (W)	10W/m
Voltage (V)	24V
Led type	SMD2835
Lumens ^(6500°K)	1250 Lm/m
Lumens ^(4000°K)	1200 Lm/m
Lumens ^(3000°K)	1150 Lm/m
Led type	120°
Waterproofing	IP20
N° leds/m	140
Measurements	5000x10x1.2mm
Cuttable	every 50mm
PCB	10mm
Working temperature	-40°C / +60°C
Apt for	indoor
Packaging	1 roll/5m
Guarantee	3 years

ELITE 15

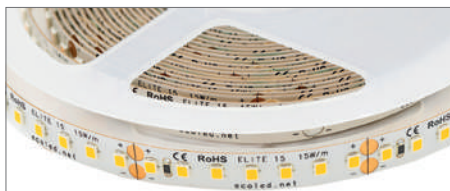

Ref: 31.011 6500°K
 Ref: 31.012 4000°K
 Ref: 31.013 3000°K
 Ref: 31.014 2700°K
 Ref: 31.015 2400°K
 Ref: 31.016 2100°K

Single-coloured flexible strip **ELITE**
 IP20 with 140 leds/metre 2835SMD.
10mm PCB.

Requires use with led profile to permit dissipation.

Heat dissipation tape included.

CRI >80.


Daily recommended use: 18h.

Maximum connection in open circuit: 8m

Maximum connection in closed circuit: 15m

Power (W)	15W/m
Voltage (V)	24V
Led type	SMD2835
Lumens ^(6500°K)	1920 Lm/m
Lumens ^(4000°K)	1875 Lm/m
Lumens ^(3000°K)	1850 Lm/m
Lumens ^(2700°K)	1800 Lm/m
Lumens ^(2400°K)	1725 Lm/m
Lumens ^(2100°K)	1500 Lm/m
Led type	120°
Waterproofing	IP20
N° leds/m	140
Measurements	5000x10x1.2mm
Cuttable	every 50mm
PCB	10mm
Working temperature	-40°C / +60°C
Apt for	indoor
Packaging	1 roll/5m
Guarantee	3 years

ELITE 20

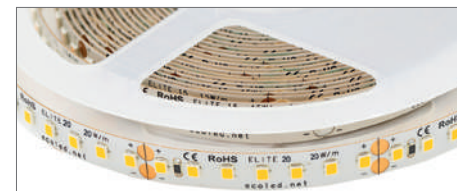

Ref: 31.017 6500°K
 Ref: 31.018 4000°K
 Ref: 31.019 3000°K

Single-coloured flexible strip **ELITE**
 IP20 with 140 leds/metre 2835SMD.
10mm PCB.

Requires use with led profile to permit dissipation.

Heat dissipation tape included.

CRI >80.

Daily recommended use: 18h

Maximum connection in open circuit: 5m

Maximum connection in closed circuit: 10m

Power (W)	20W/m
Voltage (V)	24V
Led type	SMD2835
Lumens ^(6500°K)	2060 Lm/m
Lumens ^(4000°K)	2050 Lm/m
Lumens ^(3000°K)	2010 Lm/m
Led type	120°
Waterproofing	IP20
N° leds/m	140
Measurements	5000x10x1.2mm
Cuttable	every 50mm
PCB	10mm
Working temperature	-40°C / +60°C
Apt for	indoor
Packaging	1 roll/5m
Guarantee	3 years