

RGB AND RGB+W WIFI CONTROLLER - 4 CHANNELS

LED CONTROLLERS



Ref: 41.088

12V -24V

A very small non-waterproof sequencer offering IP20, which permits multiple modes and effects.



It is controlled by means of a smartphone or a tablet with operative systems IOS (Apple), version 6.0 or Android, version 4.3 upwards.

Smart voice control:

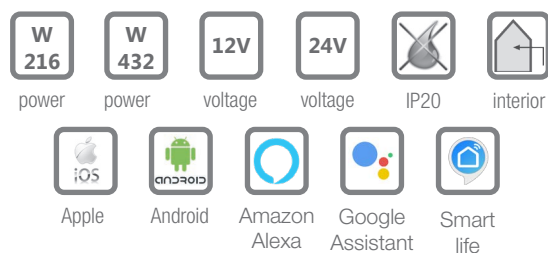

Power (W)	180W (12V)
Power (W)	360W (24V)
Channels (output)	4
Amps	6A x channel
Maximum load	15A
Signal detection distance	20m
Maximum signal detection distance	30m clear, signal repeats between them
Control	Wifi (Tuya Smart app) App online voice control remote control
Memory	yes
Measurements	85x45x26.6mm
Colour regulation	yes
Connection type	cable or jack
Working temperature	-20°C / 60°C
Waterproofing	IP20
Fixing	double-sided tape
Packaging	1 unit
Guarantee	2 years

Approved by:  

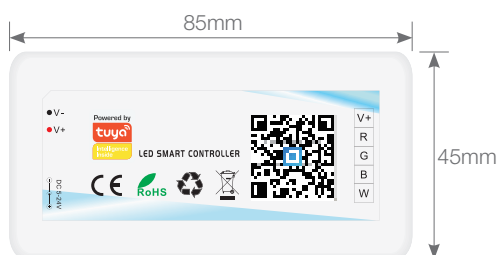

BARCELONA
C/ Carles Buigues, 13
08420 Canovelles
Info@luznegra.net
Tel: +34 938 402 598

MADRID
C/ Adaptación, 27
28906 Getafe
centro@luznegra.net
Tel: +34 916 416 081

PARIS
113 Avenue Joffre
77450 Esbly
france@luznegra.net
Tel: +33 (0) 160 426 585

RGB AND RGB+W WIFI CONTROLLER - 4 CHANNELS

LED CONTROLLERS




Operation instructions:

Led smart controller:

1. Scan the QR code (or search "FairyNest" on Google Play or App Store) to download the FairyNest App.





2. Open the App and register your FairyNest account with your mobile number or email address.

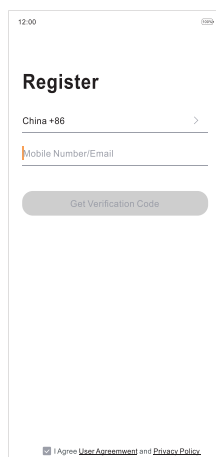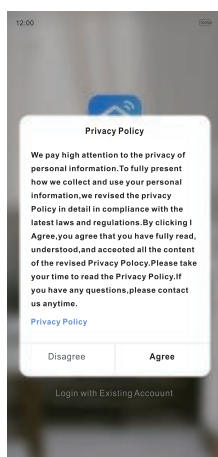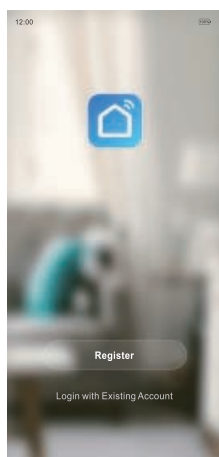

App instalation:




1. Connect the led strip to the Smart controller.
2. Power up smart controller (DC5-24V).
3. Click "+" button to configure the new smart controller.
4. Power off the controller three times and the led lamp will flash in white.

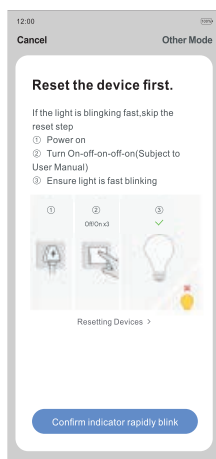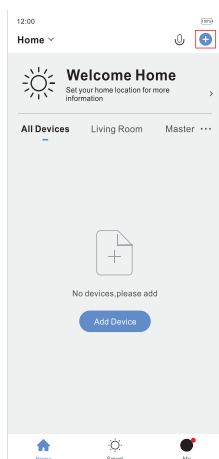

5. Input your Wifi network password.
6. Please keep your phone, the Wifi router and the controller closer to maintain a better signal connecting during configuration.
7. After the configuration is completed, the controller will successfully access the internet.



RGB AND RGB+W WIFI CONTROLLER - 4 CHANNELS

LED CONTROLLERS

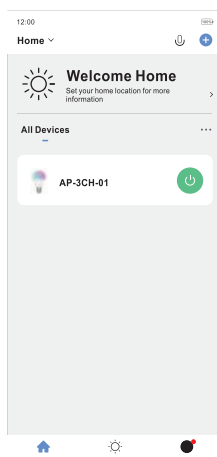
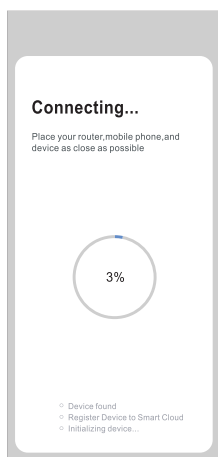
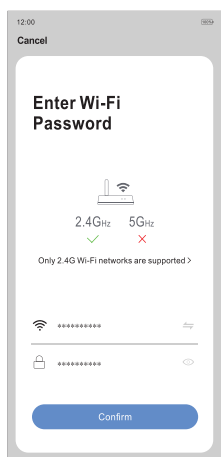


FairyNest App function:

1. There are four seven-colour dynamic effects both of them can be called via voice commands, and you can long press and drag colours into four slots to configure the custom-colour dynamic effects.
2. 8 buttons for 8 special led effects that can be easily called using the FairyNest app and be called via voice commands.
3. In the static colour page, you can combine any static colour using the colour ring and the brightness and saturation adjust bars.
4. You can long press and drag your favourite colours into four slots.
5. Freely name the name of the luminaire product, use it more comfortably.

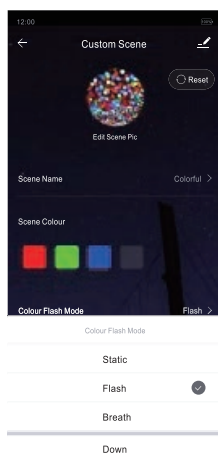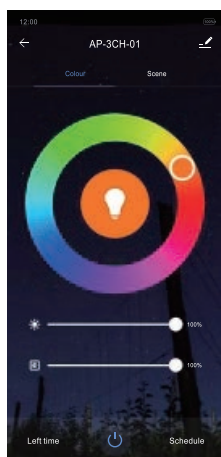

6. This product has a timing function, which can be freely set to turn on and off the light, it is more comfortable and convenient.
7. It can customize scene colour changes, offering greater flexibility.

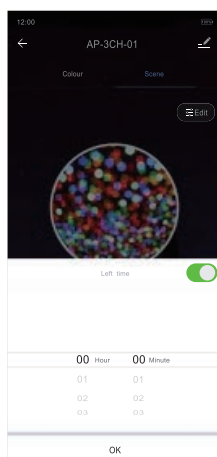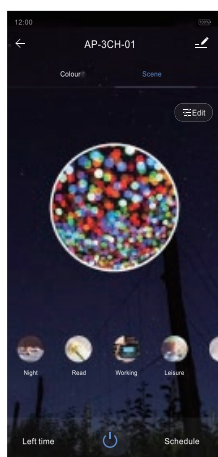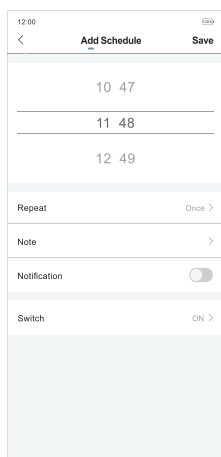

RGB AND RGB+W WIFI CONTROLLER - 4 CHANNELS

LED CONTROLLERS

Important:

1. Don't expose the components of this product directly to moisture.
2. Don't expose the components this product to excessively high temperatures.
3. Please keep out of reach of children.
4. Please consult your owner's manual and/or local dealer if issues arise.
5. The supply terminals are not being short-circuited.

Connection:

