

## BLUETOOTH SEQUENCER RGB

## SEQUENCERS FOR LEDS

Ref: 41.073

12V -24V

A very small non-waterproof sequencer offering IP25, which permits multiple modes and effects. It is controlled by means of a smartphone or a tablet with operative systems IOS (Apple), version 6.0 or Android, version 4.3 upwards.


As the connection is via bluetooth V2.1 and does not occupy the wifi channel, this can be used for internet connection or other uses. It is only suitable for indoors.

### Installation App

1. Directly access the software download using the QR code or by entering [www.leddreamlight.com](http://www.leddreamlight.com)
2. Choose iOS or Android to download the file.
3. After downloading successfully, click on the application to open the software (very intuitive to use).  
You can control up to 10 units at the same time by assigning each controller to a group.
4. Color assignment, brightness control, intensity regulation, time programming, red, green and blue color control (RGB), speed control +/-, color change function to the rhythm of music (in the library that is stored on the tablet or smartphone, etc...





QR code

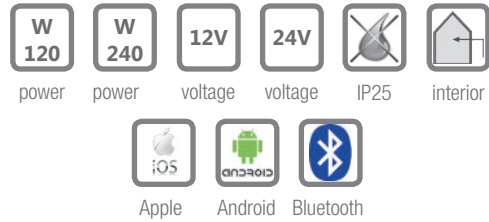

Power (W)	120W (12V)
Power (W)	240W (24V)
Channels (output)	3
Amps	3A x channel
Signal detection distance	20m
Weight	46g
Measurements	86x45x23mm
Memory	yes
Waterproofing	IP25
Packaging	1 unit
Guarantee	2 years

Aprobed by: 

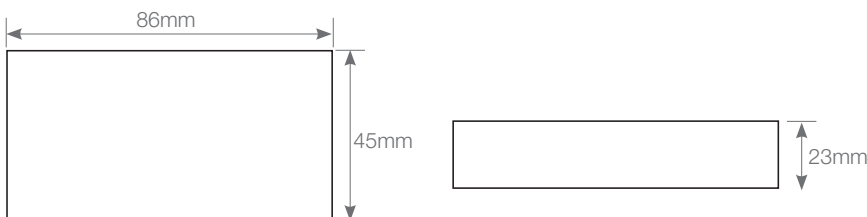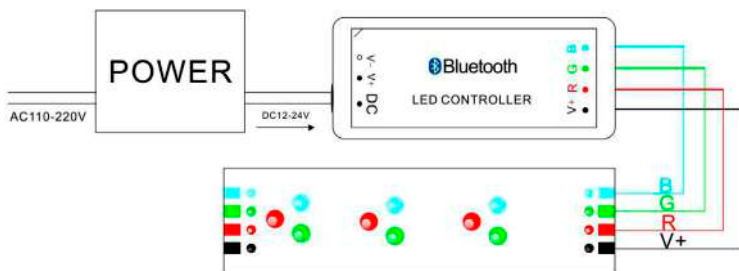

**BARCELONA**  
C/ Carles Buhigues, 13  
08420 Canovelles  
Info@luznegra.net  
Tel: +34 938 402 598

**MADRID**  
C/ Adaptación, 27  
28906 Getafe  
centro@luznegra.net  
Tel: +34 916 416 081

**PARIS**  
113 Avenue Joffre  
77450 Esbly  
france@luznegra.net  
Tel: +33 (0) 160 426 585