

Movement sensor


Ref: 41.006

Features:

A small movement switch for inserting inside our led profiles which is activated on detecting movement from a distance of maximum 2.5 metre and at a 90° angle. As long as there is movement the sensor will stay activated, but once it fails to detect any presence, it will remain "ON" for 45" and will then switch off.

We recommend a layer of insulating tape on the lower part of the switch when mounting in the profile to avoid malfunctioning.

The cover has to be perforated so that the switch's head remains visible.

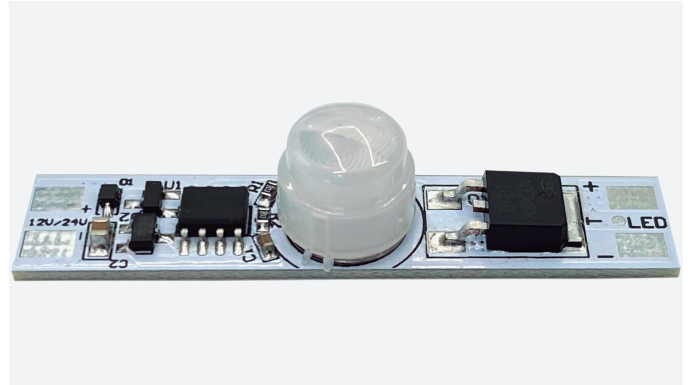

Technical characteristics

Technical data

| | |
|----------------------|-----------------------|
| Power | 48W (12V) - 96W (24V) |
| Voltage | 12V - 24V |
| Exit | 1 channel |
| Amps | 4A |
| Degree of protection | IP20 |

Services

| | |
|--------------------|--------------------|
| Apt for | Indoor |
| Fixing | Adhesive tape |
| Movement detection | 2.5 metro máx. |
| Time activated | 45 seconds approx. |
| Detection angle | 90° |

Temperatures and operating conditions


| | |
|---------------------|---------------|
| Working temperature | -20°C / +45°C |
|---------------------|---------------|



Attention

1. The product should be installed by professionals.
2. Before switching on the power, please ensure that all wiring is correct, so as not to cause damage to the devices.
3. In the case of failure, please do not attempt to manipulate without the help of a specialised technician.


Movement sensor

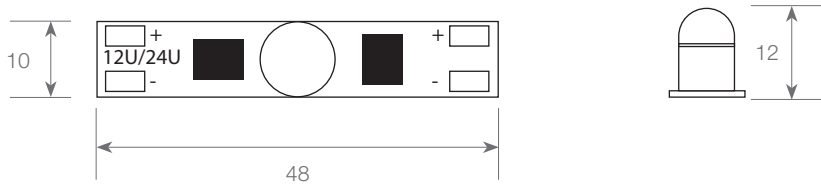

Dimensions and weight

| | | | |
|--------|------|--------|------|
| Length | 48mm | Height | 12mm |
| Width | 10mm | | |

Connection diagram

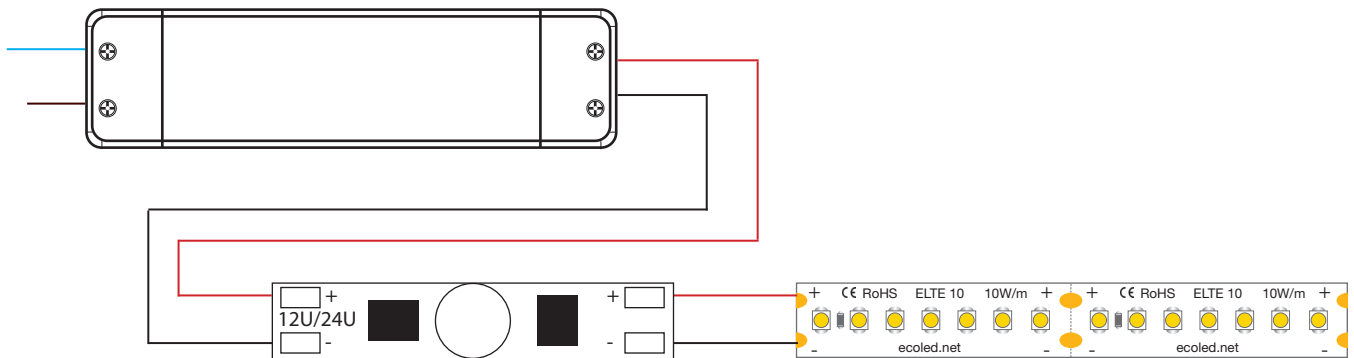

Example

