

Ref: 38.021

### Features:


- Protection against transient main peaks up to 2KV (between L and N) and up to 4KV (between L/N and PE).
- Electrical short-circuit protection
- Overload protection
- Overtemperature protection
- Degree of protection: IP20
- Protection class I




Electrical characteristics	Power	30W
	Voltage 50-60 Hz (V)	220V - 240V
	Main current mA	180mA - 161mA
	Inrush current A / $\mu$ s	30A / 250A
	Current output DC mA ( $\pm$ 5%)	0mA / 1250mA
	Voltage output DC (min-max "V")	24V
	THD %	<15%
	Efficiency at full load % (230V)	>87%
	Ripple 100 Hz	<3%
Maximum ratings	Ambient temperature range °C min.	-25 °C
	Ambient temperature range °C max.	+50 °C
	Operation humidity range % min.	20%
	Operation humidity range % max.	60%
	Storage temperature range °C min.	-25 °C
	Ambient temperature range °C max.	+50 °C
	Storage humidity range % min.	5%
	Storage humidity range % max.	95%
	Max. operation temperature at $t_c$ point °C	+75 °C
Expected service life time	Degree of protection	IP20
	Operation current Max.	65°C - 75°C
	Operation current hrs.	100,000h - 50,000h
Dimming	Dimmable	yes
	Dimming interface DALI	yes
	DALI power supply integrated	no
	PUSH	yes
	Phase cut trailing edge	no
	Control phase	no
	Bluetooth	no
	Dimming interface 1-10V	yes
	Dimming interface others	no
	Min. dimming level	1%
	Max. dimming level	100%
	PWM dimming frequency	500Hz
Other	Dimension	359x30x21mm
	Casing shape	M10
	Weight	277g
	Guarantee	5 years



**Measurements:**

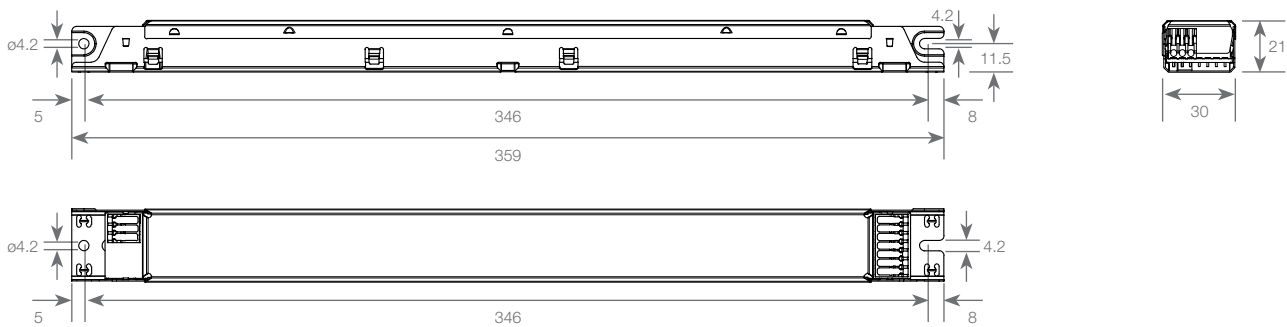


**Diagram:**

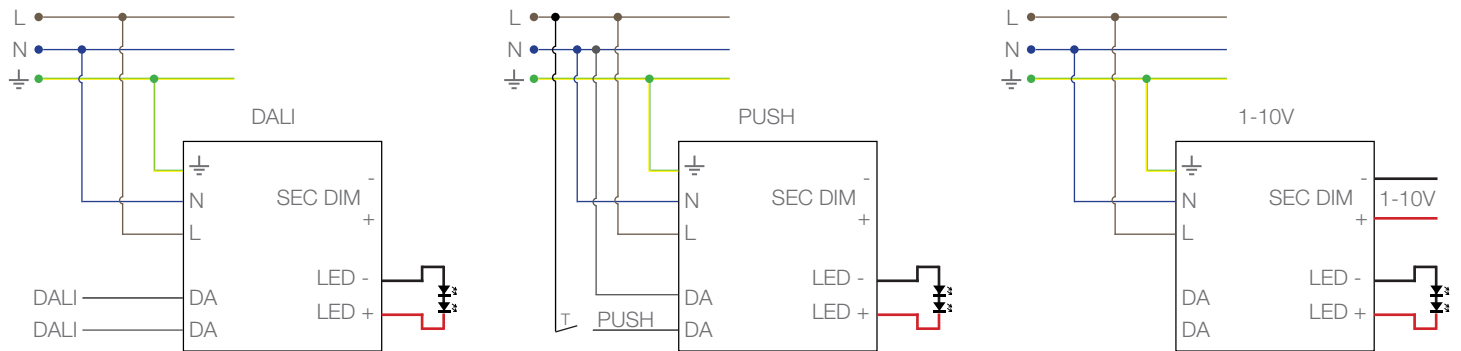


**Type performance graphs / Type EDXe**


**Working area**

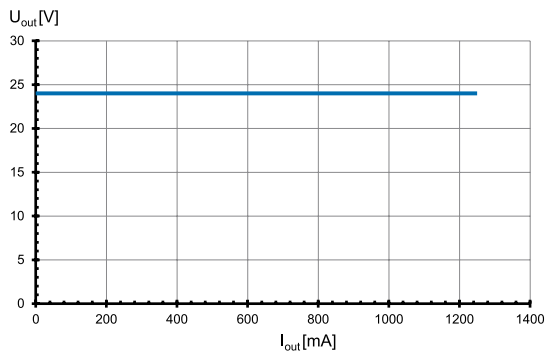


**Efficiency**

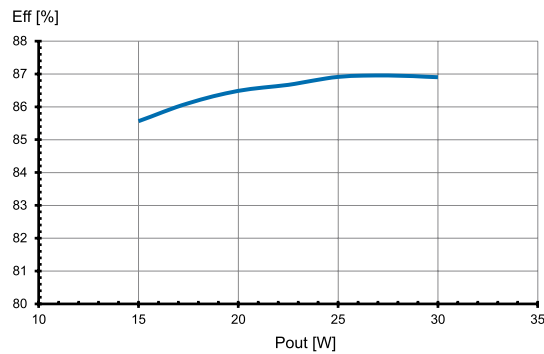

**Power factor**

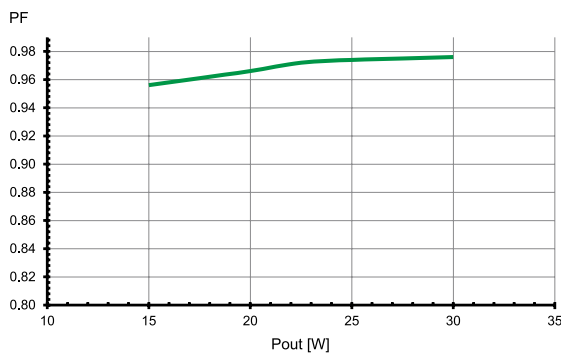

**Total harmonic factor (THD)**

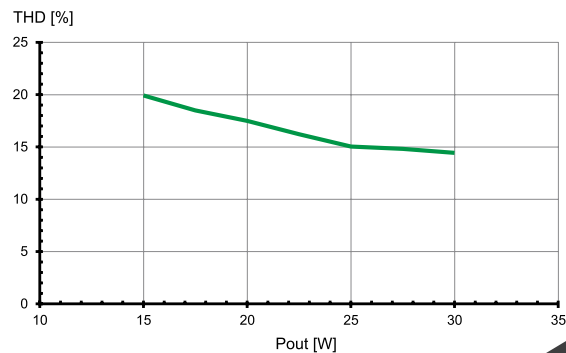

**Applied standards:**

- Mandatory regulations:**

- DIN VDE 0100
- EN 60598-1

- Transient main peaks protection: values are in compliance with EN 61547 (interference immunity). Surges between L/N: up to 2 kV. Surges between L/N-PE: up to 4 kV.
- Short-circuit protection: the control gear is protected against permanent short-circuit with automatic restart function.
- Overload protection: the control gear only works in range of rated output power and voltage problemfree. Please check before switch-on main power supply that the selected led load is suitable (see Electrical Characteristics on data sheet).
- Overheating: The control gear has overheating protection acc. to IEC 61347-1 C 5e). In case of overheating the control gear will shut down. For restart switch of the mains for 1 min. and start again.
- If any of the above mentioned safety functions will be triggered, disconnect the control gear from the power supply then find and eliminate the cause of the problem.

- Mounting position:

- Built-in: any position inside a luminaire is allowed.
  - Independent application: drivers are allowed to use for independent applications.
- Installation location:
- led drivers are designed for integration into luminaires or comparable devices.
  - Installation in outdoor luminaires: degree of protection for luminaire with water protection rate  $\geq 4$  (e.g. IP54 required).

- Degree of protection: IP20
- Clearance: min. 0.10m from walls, ceilings and insulation.
- Surface: solid and plane surface for optimum heat dissipation required.
- Heat transfer:
  - If the led drivers is destined for installation in a luminaire. Sufficient heat transfer must be ensured between the led driver and the luminaire casing.
  - Led drivers should be mounted with the greatest possible clearance to heat sources. During operation, the temperature measure at the led driver's  $t_c$  point must not exceed the specified maximum value.
- Fastening: using M4 screws in the designated holes.
- Tightening torque: 0.2 Nm.

- Connection terminals: push-in terminals for rigid or flexible conductors with a section of 0.2 - 1.5mm<sup>2</sup>.
- Stripped length: 8.5–10mm.
- Wiring: the main conductor within the luminaire must be kept short (to reduce the induction of interference). Main and lamp conductors must be kept separate and if possible should not be laid in parallel to one another.
- Polarity: please ensure the correct polarity of the leads prior to commissioning. Reversed polarity can destroy the modules.
- Through-wiring: is not allowed.
- Secondary load: the sum of forward voltages of led loads is within the tolerances which are mentioned in the Electrical Characteristics on the data sheet.

[illegible]