

PROFESSIONAL series ledprofile, pendant/surface-mounted, made of high-purity aluminium with textured white finish. It is also supplied in lacquered white or textured black and ideal for using on ceilings or for hanging luminaires and even on walls (providing Up&Down lighting but only for the silver anodised profile). Drivers can be housed inside.

This profile can be combined with our "easy-ON" frosted white cover, which offers an IP65 to the luminaire, which is extremely useful in areas with high humidity levels. We also have available transparent and frosted microprism covers which improve glare and UGR levels.


Both profile and cover are available in 6m lengths, allowing us to carry out long installations with no joints.

We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.

MUNICH SLIM




IP65

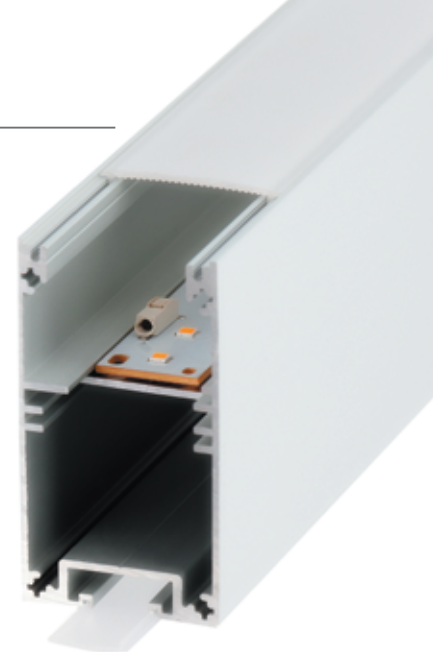

Aluminium profile

17.003 lacquered white 6m



Aluminium profile

22.191 raw (6000x34x1.5mm)



Profile joints

22.044 steel set of 2 units



"easy-ON" polycarbonate cover (Down)

18.070 frosted 6m
18.071 transparent microprism 6m
18.072 frosted microprism 6m
18.073 Black&White 6m



"easy-ON" polycarbonate cover (Up)

18.001 transparent 2m
18.002 opal 2m
18.003 frosted 2m
18.004 transparent 6m
18.005 opal 6m
18.006 frosted 6m
18.134 frosted 60m

The easy-ON covers are only suitable for the anodised profiles. Our exclusive sealing system is not compatible with the lacquered profiles.



Polycarbonate cover (Up)

18.140 frosted 2m
18.139 frosted 6m

Compatible with lacquered profiles



Aluminium endcaps without hole


19.232 lacquered textured white



Hanging kit

21.001 chrome set of 2 units
21.002 white set of 2 units
21.003 black set of 2 units

Scale 1:1

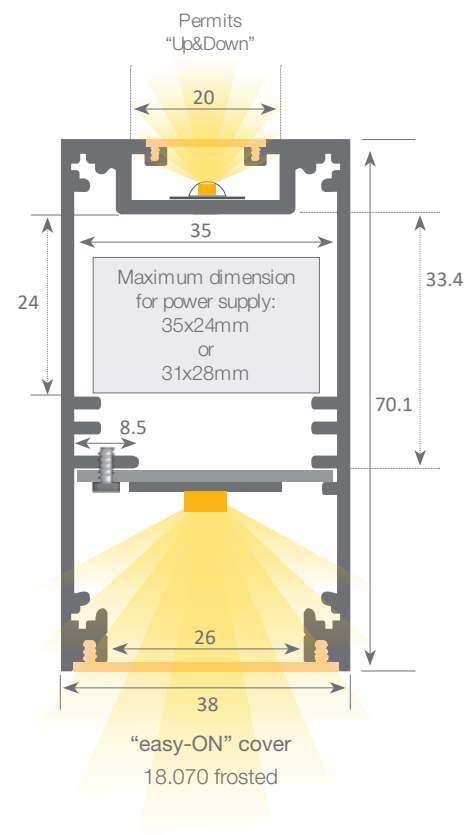

Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.16 Kg / Alloy: 6063 / Perimeter: 524mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0