

RGB CONTROLLER WITH REMOTE CONTROL - 3 CHANNELS


SEQUENCERS FOR LEDS

Ref: 41.024

12V -24V

RGB sequencer (4A x channel).
No memory.
Includes remote with signal receiver.
Battery not included.

This product allows us to fix 7 colours (white, blue, turquoise, red, green, yellow and lilac) with progressive changes, with flashing, on and off sequences for the 7 colours and also for the 3 channels (RGB). We can also control the speed of the colour changes (4 steps). Once we switch off, the last colour changing sequence is not recorded when we switch on again.



Power (W)	144W (12V)
Power (W)	288W (24V)
Channels (output)	3
Amps	4A x channel
Signal detection distance	15m
Programs	10
Measurements (remote control)	130x64x24mm
Channels	1
Save memory	no
Regulation intensity	yes
Receiver included	yes
Working temperature	-20°C / +45°C
Waterproofing	IP20
Packaging	1 unit
Guarantee	2 years


Aprobado por: 



Controller size



remote control size

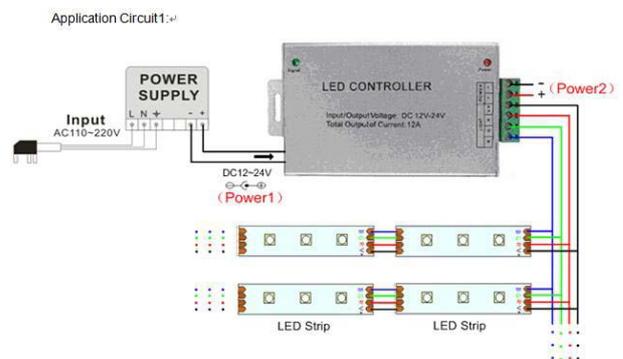

BARCELONA
C/ Carles Buhigues, 13
08420 Canovelles
Info@luznegra.net
Tel: +34 938 402 598

MADRID
C/ Adaptación, 27
28906 Getafe
centro@luznegra.net
Tel: +34 916 416 081

PARIS
113 Avenue Joffre
77450 Esbly
france@luznegra.net
Tel: +33 (0) 160 426 585