

EPSILON




On/Off

- Ref: 80.027** skyled Epsilon lacado blanco - 6000K / *skyled Epsilon white lacquered - 6000K*
Ref: 80.026 skyled Epsilon lacado blanco - 4000K / *skyled Epsilon white lacquered - 4000K*
Ref: 80.025 skyled Epsilon lacado blanco - 3000K / *skyled Epsilon white lacquered - 3000K*
Ref: 80.030 skyled Epsilon lacado negro - 6000K / *skyled Epsilon black lacquered - 6000K*
Ref: 80.029 skyled Epsilon lacado negro - 4000K / *skyled Epsilon black lacquered - 4000K*
Ref: 80.028 skyled Epsilon lacado negro - 3000K / *skyled Epsilon black lacquered - 3000K*



DALI

- Ref: 80.177** skyled Epsilon lacado blanco - 6000K / *skyled Epsilon white lacquered - 6000K*
Ref: 80.176 skyled Epsilon lacado blanco - 4000K / *skyled Epsilon white lacquered - 4000K*
Ref: 80.175 skyled Epsilon lacado blanco - 3000K / *skyled Epsilon white lacquered - 3000K*
Ref: 80.180 skyled Epsilon lacado negro - 6000K / *skyled Epsilon black lacquered - 6000K*
Ref: 80.179 skyled Epsilon lacado negro - 4000K / *skyled Epsilon black lacquered - 4000K*
Ref: 80.178 skyled Epsilon lacado negro - 3000K / *skyled Epsilon black lacquered - 3000K*


Escala 1:2 / Scale 1:2 (mm)



Escala 1:50 / Scale 1:50 (mm)

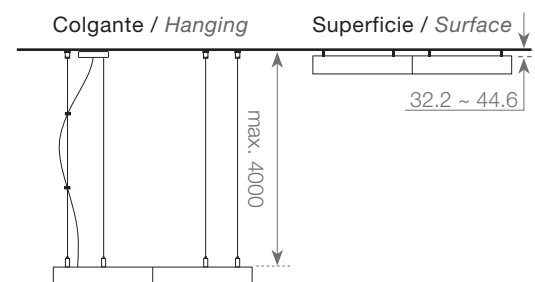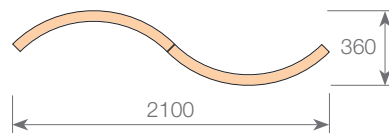

Curvas fotométricas / Photometric curves

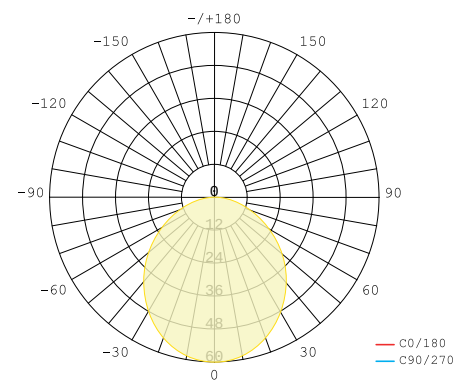

Características técnica / Technical data

Potencia luminaria / Luminaire power	36W	Control / Control	On-Off / DALI
Flujo luminaria / Luminaire flux	2963 lm (6000K) 2923 lm (4000K) 2805 lm (3000K)	Alimentación eléctrica / Electric feed	220~240V, 50/60Hz
Eficiencia lumínica / Luminous efficiency	85 lm/W	Sistema óptico / Optical system	difusor glaseado / frosted cover
Eficiencia energética / Energetic efficiency		Material perfil / Profile material	AL6063-T5
CCT	6000K / 4000K / 3000K	Dimensiones / Measurements	2100 x 360 x 60 mm
IRC / CRI	>80	Temperatura trabajo / Working temperature	-20°C ~ 30°C
Ángulo de apertura / Opening angle	105°	Vida útil / Lifespan	50.000 h (L80/B20)

