

SATURNO MINI 52



On/Off

Ref: 80.213 skyled Saturno Mini 52 lacado blanco - 6500K / skyled Saturno Mini 52 white lacquered - 6500K

Ref: 80.214 skyled Saturno Mini 52 lacado blanco - 4000K / skyled Saturno Mini 52 white lacquered - 4000K

Ref: 80.215 skyled Saturno Mini 52 lacado blanco - 2700K / skyled Saturno Mini 52 white lacquered - 2700K

Ref: 80.216 skyled Saturno Mini 52 lacado negro - 6500K / skyled Saturno Mini 52 black lacquered - 6500K

Ref: 80.217 skyled Saturno Mini 52 lacado negro - 4000K / skyled Saturno Mini 52 black lacquered - 4000K

Ref: 80.218 skyled Saturno Mini 52 lacado negro - 2700K / skyled Saturno Mini 52 black lacquered - 2700K


Colgante / Hanging

max. 4000

Escala 1:1 / Scale 1:1 (mm)

Escala 1:25 / Scale 1:25 (mm)

Curvas fotométricas / Photometric curves

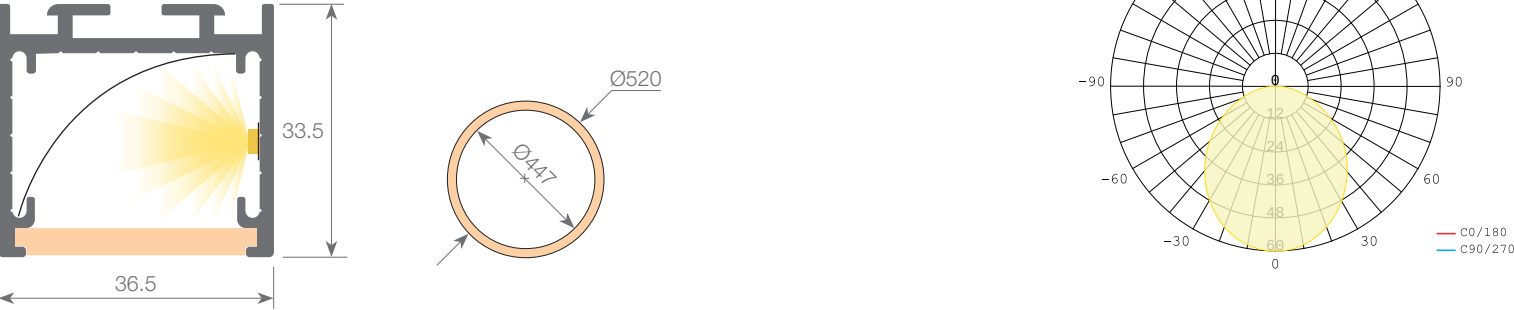

Características técnica / Technical data

Potencia luminaria / Luminaire power	27.8W	Control / Control	On-Off
Flujo luminaria / Luminaire flux	2434 lm (6500K) 2277 lm (4000K) 2068 lm (2700K)	Alimentación electrica / Electric feed	220~240V, 50/60Hz
Eficiencia lumínica / Luminous efficiency	87 lm/W	Sistema óptico / Optical system	difusor opal / opal cover
Eficiencia energética / Energetic efficiency	F	Material perfil / Profile material	AL6063-T5
CCT	6500K / 4000K / 2700K	Dimensiones / Measurements	Ø520 x 36.5 x 33.5 mm
IRC / CRI	80	Temperatura trabajo / Working temperature	-20°C ~ 40°C
Ángulo de apertura / Opening angle	112°	Vida útil / Lifespan	50.000 h

