


SATURNO MINI 120




On/Off

Ref: 80.225	skyled Saturno Mini 120 lacado blanco - 6500K / skyled Saturno Mini 120 white lacquered - 6500K
Ref: 80.226	skyled Saturno Mini 120 lacado blanco - 4000K / skyled Saturno Mini 120 white lacquered - 4000K
Ref: 80.227	skyled Saturno Mini 120 lacado blanco - 2700K / skyled Saturno Mini 120 white lacquered - 2700K
Ref: 80.228	skyled Saturno Mini 120 lacado negro - 6500K / skyled Saturno Mini 120 black lacquered - 6500K
Ref: 80.229	skyled Saturno Mini 120 lacado negro - 4000K / skyled Saturno Mini 120 black lacquered - 4000K
Ref: 80.230	skyled Saturno Mini 120 lacado negro - 2700K / skyled Saturno Mini 120 black lacquered - 2700K


Colgante / Hanging

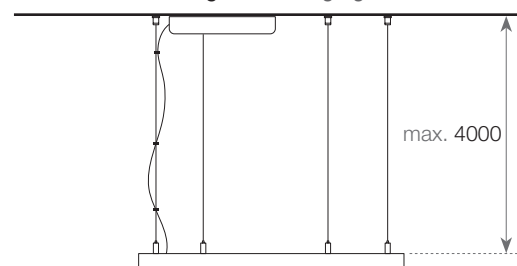


Escala 1:1 / Scale 1:1 (mm)

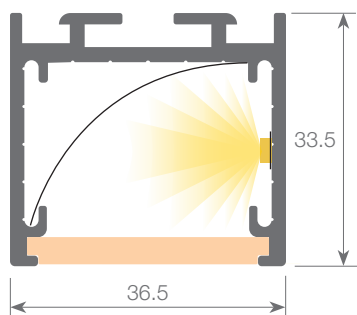

Escala 1:25 / Scale 1:25 (mm)

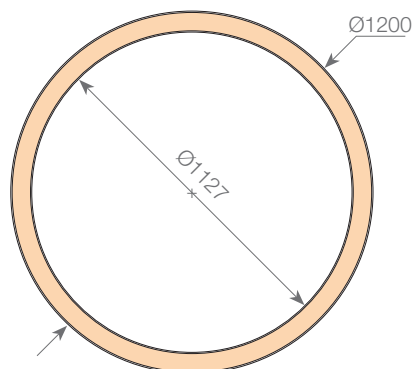

Curvas fotométricas / Photometric curves

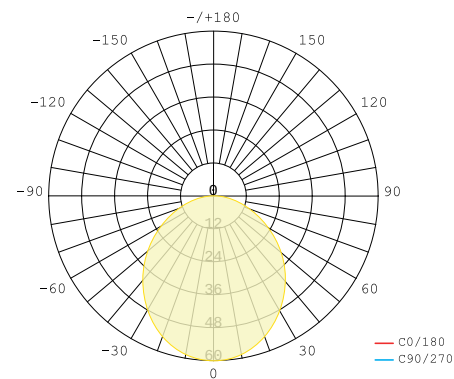

Características técnica / Technical data

Potencia luminaria / Luminaire power	62.7W
Flujo luminaria / Luminaire flux	5718 lm (6500K) 5350 lm (4000K) 4859 lm (2700K)
Eficiencia lumínica / Luminous efficiency	85 lm/W
Eficiencia energética / Energetic efficiency	F
CCT	6500K / 4000K / 2700K
IRC / CRI	80
Ángulo de apertura / Opening angle	112°

Control / Control	On-Off
Alimentación eléctrica / Electric feed	220~240V, 50/60Hz
Sistema óptico / Optical system	difusor opal / opal cover
Material perfil / Profile material	AL6063-T5
Dimensiones / Measurements	Ø1200 x 36.5 x 33.5 mm
Temperatura trabajo / Working temperature	-20°C ~ 40°C
Vida útil / Lifespan	50.000 h

