


VENUS 90




On/Off


- Ref: 80.075**
- skyled Venus 90 lacado blanco - 6500K / skyled Venus 90 white lacquered - 6500K
- Ref: 80.076**
- skyled Venus 90 lacado blanco - 4000K / skyled Venus 90 white lacquered - 4000K
- Ref: 80.077**
- skyled Venus 90 lacado blanco - 2700K / skyled Venus 90 white lacquered - 2700K
- Ref: 80.074**
- skyled Venus 90 lacado blanco - 1900K-6500K / skyled Venus 90 white lacquered - 1900K- 6500K
- Ref: 80.087**
- skyled Venus 90 lacado negro - 6500K / skyled Venus 90 black lacquered - 6500K
- Ref: 80.088**
- skyled Venus 90 lacado negro - 4000K / skyled Venus 90 black lacquered - 4000K
- Ref: 80.089**
- skyled Venus 90 lacado negro - 2700K / skyled Venus 90 black lacquered - 2700K
- Ref: 80.086**
- skyled Venus 90 lacado negro - 1900K-6500K / skyled Venus 90 black lacquered - 1900K- 6500K

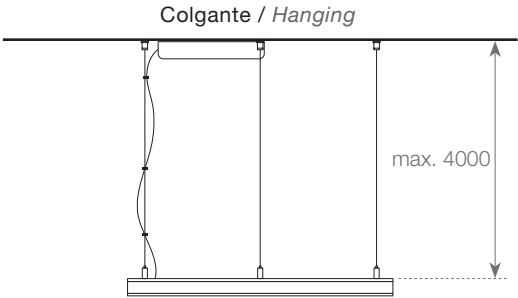


Escala 1:1 / Scale 1:1 (mm)

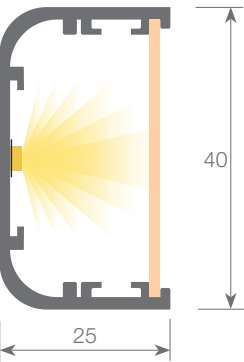

Escala 1:25 / Scale 1:25 (mm)



Curvas fotométricas / Photometric curves

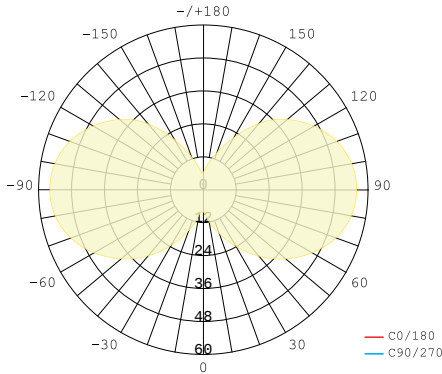

Características técnica / Technical data

Potencia luminaria / Luminaire power	60.8W
Flujo luminaria / Luminaire flux	2575 lm (6500K) 2536 lm (4000K) 2397 lm (2700K) 1688 lm - 2575 lm (1900K - 6500K)
Eficiencia lumínica / Luminous efficiency	42 lm/W
Eficiencia energética / Energetic efficiency	
CCT	6500K / 4000K / 2700K / 1900K-6500K
IRC / CRI	>80
Ángulo de apertura / Opening angle	105°

Control / Control	On-Off
Alimentación eléctrica / Electric feed	220~240V, 50/60Hz
Sistema óptico / Optical system	difusor opal / opal cover
Material perfil / Profile material	AL6063-T5
Dimensiones / Measurements	Ø900 x 25 x 40 mm
Temperatura trabajo / Working temperature	-20°C ~ 40°C
Vida útil / Lifespan	50.000 h

