


NEPTUNO 110




On/Off

Ref: 80.103	skyled Neptuno 110 lacado blanco - 6500K / skyled Neptuno 110 white lacquered - 6500K
Ref: 80.104	skyled Neptuno 110 lacado blanco - 4000K / skyled Neptuno 110 white lacquered - 4000K
Ref: 80.105	skyled Neptuno 110 lacado blanco - 2700K / skyled Neptuno 110 white lacquered - 2700K
Ref: 80.102	skyled Neptuno 110 lacado blanco - 1900K-6500K / skyled Neptuno 110 white lacquered - 1900K- 6500K
Ref: 80.115	skyled Neptuno 110 lacado negro - 6500K / skyled Neptuno 110 black lacquered - 6500K
Ref: 80.116	skyled Neptuno 110 lacado negro - 4000K / skyled Neptuno 110 black lacquered - 4000K
Ref: 80.117	skyled Neptuno 110 lacado negro - 2700K / skyled Neptuno 110 black lacquered - 2700K
Ref: 80.114	skyled Neptuno 110 lacado negro - 1900K-6500K / skyled Neptuno 110 black lacquered - 1900K- 6500K


Colgante / Hanging

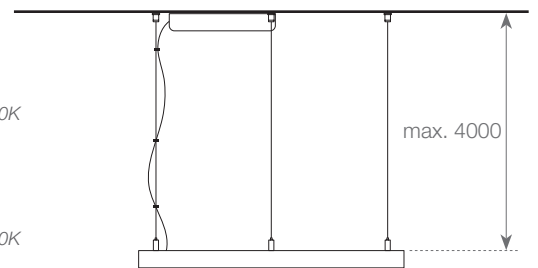


Escala 1:1 / Scale 1:1 (mm)

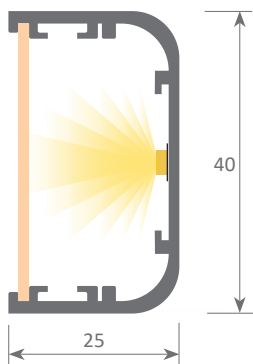

Escala 1:25 / Scale 1:25 (mm)

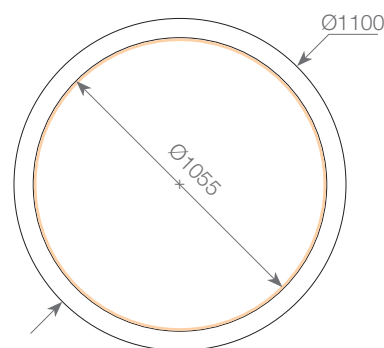

Curvas fotométricas / Photometric curves

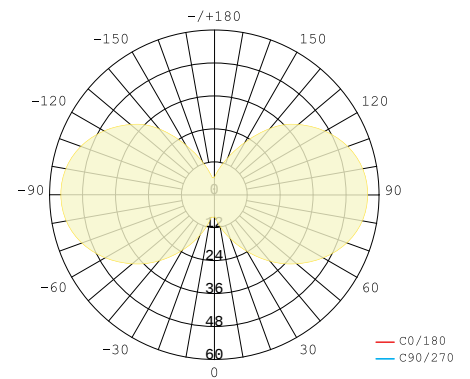

Características técnica / Technical data

Potencia luminaria / Luminaire power	79.6W
Flujo luminaria / Luminaire flux	2643 lm (6500K) 2603 lm (4000K) 2461 lm (2700K) 1733 lm - 2643 lm (1900K - 6500K)
Eficiencia lumínica / Luminous efficiency	33 lm/W
Eficiencia energética / Energetic efficiency	
CCT	6500K / 4000K / 2700K / 1900K-6500K
IRC / CRI	>80
Ángulo de apertura / Opening angle	105°

Control / Control	On-Off
Alimentación eléctrica / Electric feed	220~240V, 50/60Hz
Sistema óptico / Optical system	difusor opal / opal cover
Material perfil / Profile material	AL6063-T5
Dimensiones / Measurements	Ø1100 x 25 x 40 mm
Temperatura trabajo / Working temperature	-20°C ~ 40°C
Vida útil / Lifespan	50.000 h

