




Referencia / Code		Largo / Length	Potencia / Power	Tª Color / Colour T.	Ángulo / Angle	Acabado / Finish	RAL
ON/OFF	DALI						
82.417	82.517	117 cm	21W	3000K	30°	Blanco / White	9003
82.418	82.518	117 cm	21W	4000K	30°	Blanco / White	
82.419	82.519	117 cm	21W	3000K	65°	Blanco / White	
82.420	82.520	117 cm	21W	4000K	65°	Blanco / White	
82.421	82.521	117 cm	21W	3000K	30°	Negro / Black	9005
82.422	82.522	117 cm	21W	4000K	30°	Negro / Black	
82.423	82.523	117 cm	21W	3000K	65°	Negro / Black	
82.424	82.524	117 cm	21W	4000K	65°	Negro / Black	

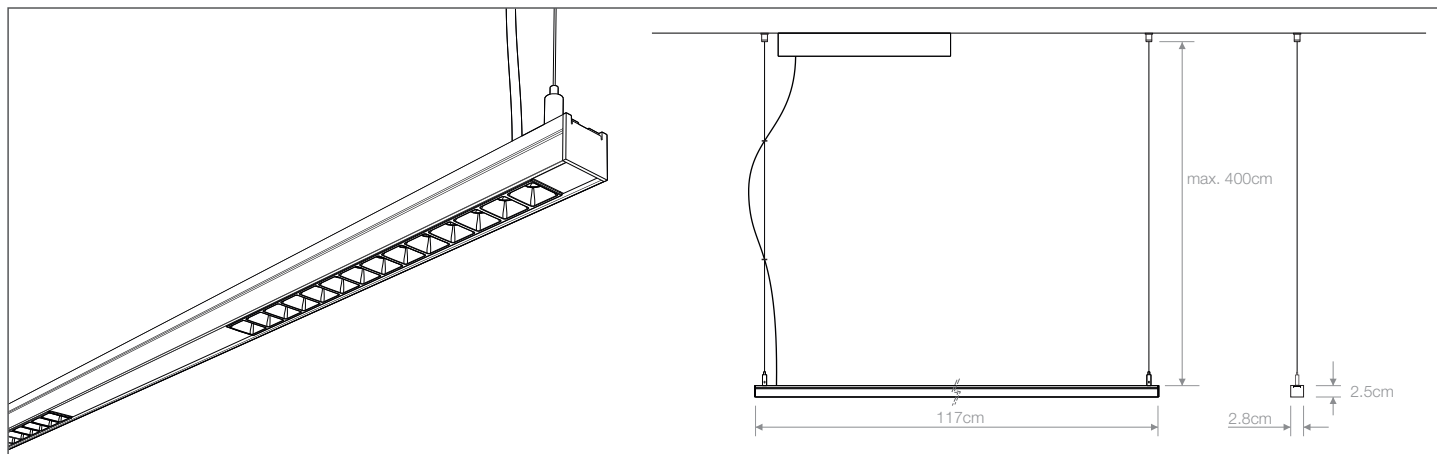

Referencia / Code		Largo / Length	Potencia / Power	Tª Color / Colour T.	Ángulo / Angle	Acabado / Finish	RAL
ON/OFF	DALI						
82.425	82.525	117 cm	28W	3000K	30°	Blanco / White	9003
82.426	82.526	117 cm	28W	4000K	30°	Blanco / White	
82.427	82.527	117 cm	28W	3000K	65°	Blanco / White	
82.428	82.528	117 cm	28W	4000K	65°	Blanco / White	
82.429	82.529	117 cm	28W	3000K	30°	Negro / Black	9005
82.430	82.530	117 cm	28W	4000K	30°	Negro / Black	
82.431	82.531	117 cm	28W	3000K	65°	Negro / Black	
82.432	82.532	117 cm	28W	4000K	65°	Negro / Black	

CARACTERÍSTICAS TÉCNICAS / TECHNICAL DATA

Potencia luminaria / Luminaire power	26.1 W / 34.8 W
Flujo luminaria / Luminaire luminous flux	2304 lm / 3072 lm (3000 K, 65°) 2429 lm / 3239 lm (4000 K, 65°)
Eficiencia lumínica / Luminous efficiency	93 lm / W
Eficiencia energética / Energetic efficiency	F
CCT	3000 K / 4000 K
CRI	> 90
UGR (4H/8H)	< 16
Dimensiones / Dimensions	117 x 2.8 x 2.5 cm

Potencia fuente de luz / Light source power	21 W / 28 W
Flujo fuente de luz / Light source luminous flux	3150 lm / 4200 lm (3000 K) 3285 lm / 4380 lm (4000 K)
Control / Control	ON/OFF - DALI
Corriente / Current	350mA
Alimentación eléctrica / Electrical feed	220...240V, 50/60Hz
Temperatura trabajo / Operating temperature	-20°C ~ 30°C
Vida útil / Lifespan	50.000 h (L80/B10)

DATOS FOTOMÉTRICOS / PHOTOMETRIC DATA

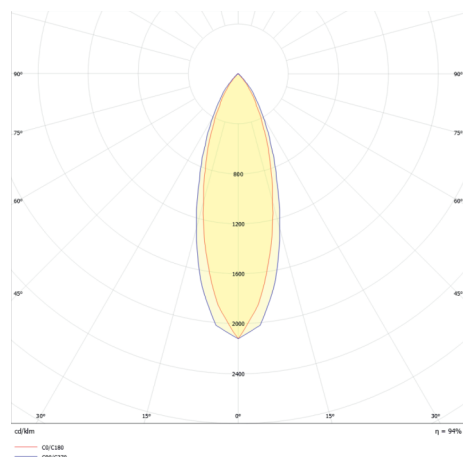
Reflector negro / Black reflector
30°
4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	12.5	13.2	12.7	13.4	13.6	14.3	15.0	14.6	15.2	15.4
2H	3H	12.4	13.0	12.6	13.2	13.5	14.2	14.8	14.5	15.0	15.3
2H	4H	12.3	12.9	12.6	13.1	13.4	14.1	14.7	14.4	14.9	15.2
2H	6H	12.2	12.8	12.5	13.0	13.3	14.0	14.6	14.4	14.8	15.1
2H	8H	12.2	12.7	12.5	13.0	13.3	14.0	14.5	14.3	14.8	15.1
2H	12H	12.1	12.6	12.5	12.9	13.2	14.0	14.4	14.3	14.7	15.1
4H	2H	12.3	12.9	12.6	13.1	13.4	14.1	14.7	14.4	14.9	15.2
4H	3H	12.2	12.6	12.5	12.9	13.3	14.0	14.4	14.3	14.7	15.1
4H	4H	12.1	12.5	12.5	12.8	13.2	13.9	14.3	14.3	14.6	15.0
4H	6H	12.0	12.4	12.4	12.7	13.1	13.8	14.2	14.2	14.5	14.9
4H	8H	12.0	12.3	12.4	12.7	13.1	13.8	14.1	14.2	14.5	14.9
4H	12H	11.9	12.2	12.4	12.6	13.0	13.7	14.0	14.2	14.4	14.8
8H	4H	12.0	12.3	12.4	12.7	13.1	13.8	14.1	14.2	14.5	14.9
8H	6H	11.9	12.1	12.3	12.5	13.0	13.7	13.9	14.1	14.3	14.8
8H	8H	11.8	12.0	12.3	12.5	12.9	13.6	13.8	14.1	14.3	14.7
8H	12H	11.8	11.9	12.3	12.4	12.9	13.6	13.7	14.1	14.2	14.7
12H	4H	11.9	12.2	12.4	12.6	13.0	13.7	14.0	14.2	14.4	14.8
12H	6H	11.8	12.0	12.3	12.5	12.9	13.6	13.8	14.1	14.3	14.7
12H	8H	11.8	11.9	12.3	12.4	12.9	13.6	13.7	14.1	14.2	14.7
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+4.3 / -14.9 +6.9 / -20.8 +8.9 / -25.6					+4.1 / -13.3 +6.8 / -21.0 +8.8 / -26.9				
standard table		BK00					BK00				
correction summand		-6.4					-4.6				
corrected glare indices based on the total luminous flux UGR diagram according to CIE 117 with SHR 0.25											

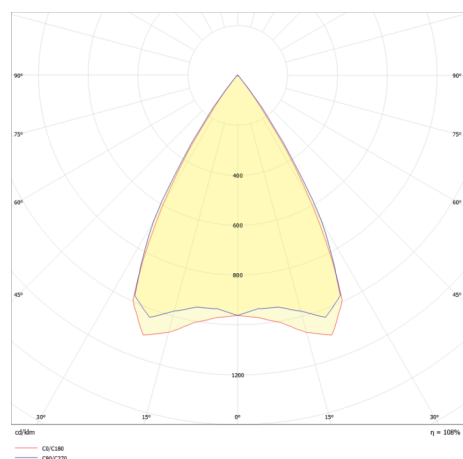
Reflector negro / Black reflector
65°
4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	15.4	16.1	15.7	16.2	16.4	16.2	16.8	16.4	17.0	17.2
2H	3H	15.3	15.9	15.6	16.1	16.3	16.0	16.6	16.3	16.8	17.1
2H	4H	15.2	15.8	15.5	16.0	16.3	16.0	16.5	16.3	16.8	17.0
2H	6H	15.1	15.6	15.5	15.9	16.2	15.9	16.4	16.2	16.7	16.9
2H	8H	15.1	15.6	15.4	15.9	16.2	15.8	16.3	16.2	16.6	16.9
2H	12H	15.1	15.5	15.4	15.8	16.1	15.8	16.3	16.2	16.6	16.9
4H	2H	15.2	15.8	15.5	16.0	16.3	16.0	16.5	16.3	16.8	17.0
4H	3H	15.1	15.5	15.4	15.8	16.1	15.8	16.3	16.2	16.6	16.9
4H	4H	15.0	15.4	15.4	15.7	16.1	15.7	16.1	16.1	16.5	16.8
4H	6H	14.9	15.2	15.3	15.6	16.0	15.7	16.0	16.1	16.3	16.7
4H	8H	14.9	15.2	15.3	15.5	15.9	15.6	15.9	16.0	16.3	16.7
4H	12H	14.8	15.1	15.3	15.5	15.9	15.6	15.8	16.0	16.2	16.6
8H	4H	14.9	15.2	15.3	15.5	15.9	15.6	15.9	16.0	16.3	16.7
8H	6H	14.8	15.0	15.2	15.4	15.9	15.5	15.7	16.0	16.2	16.6
8H	8H	14.7	14.9	15.2	15.4	15.8	15.5	15.7	16.0	16.1	16.6
8H	12H	14.7	14.8	15.2	15.3	15.8	15.4	15.6	15.9	16.0	16.5
12H	4H	14.8	15.1	15.3	15.5	15.9	15.6	15.8	16.0	16.2	16.6
12H	6H	14.7	14.9	15.2	15.4	15.8	15.5	15.7	16.0	16.1	16.6
12H	8H	14.7	14.8	15.2	15.3	15.8	15.4	15.6	15.9	16.0	16.5
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+5.4 / -21.6 +8.2 / -29.6 +10.2 / -33.5					+5.4 / -23.5 +8.2 / -32.6 +10.2 / -35.5				
standard table		BK00					BK00				
correction summand		-3.3					-2.6				
corrected glare indices based on the total luminous flux UGR diagram according to CIE 117 with SHR 0.25											