




Referencia / Code		Largo / Length	Potencia / Power	Tª Color / Colour T.	Ángulo / Angle	Acabado / Finish	RAL
ON/OFF	DALI						
82.817	82.917	122 cm	21W	3000K	65°	Blanco / White	9003
82.818	82.918	122 cm	21W	4000K	65°	Blanco / White	
82.819	82.919	122 cm	21W	3000K	90°	Blanco / White	
82.820	82.920	122 cm	21W	4000K	90°	Blanco / White	
82.821	82.921	122 cm	21W	3000K	65°	Negro / Black	9005
82.822	82.922	122 cm	21W	4000K	65°	Negro / Black	
82.823	82.923	122 cm	21W	3000K	90°	Negro / Black	
82.824	82.924	122 cm	21W	4000K	90°	Negro / Black	

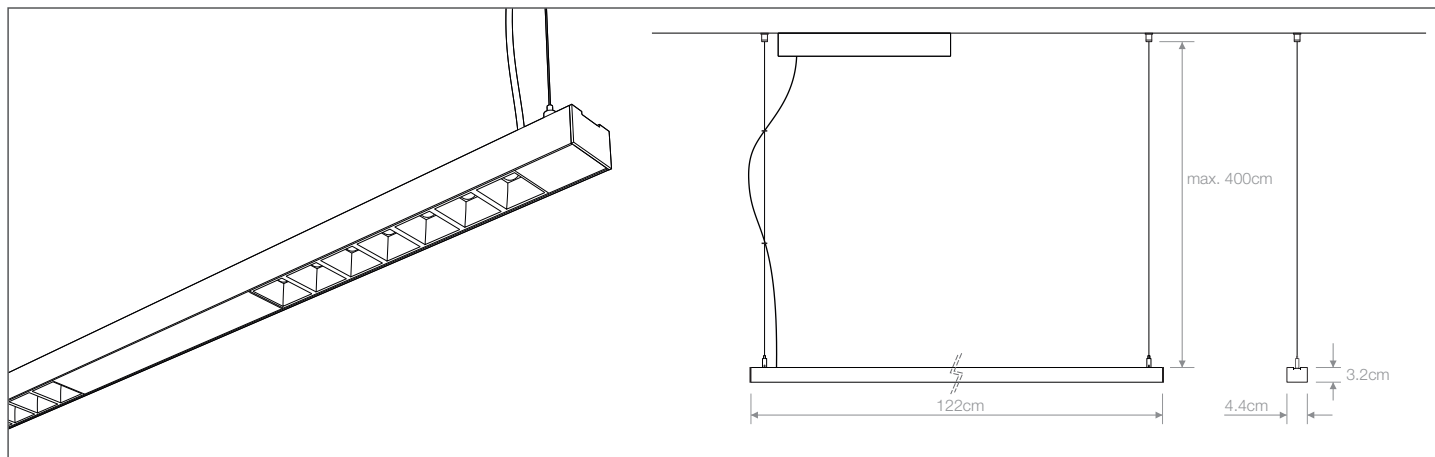

Referencia / Code		Largo / Length	Potencia / Power	Tª Color / Colour T.	Ángulo / Angle	Acabado / Finish	RAL
ON/OFF	DALI						
82.825	82.925	122 cm	28W	3000K	65°	Blanco / White	9003
82.826	82.926	122 cm	28W	4000K	65°	Blanco / White	
82.827	82.927	122 cm	28W	3000K	90°	Blanco / White	
82.828	82.928	122 cm	28W	4000K	90°	Blanco / White	
82.829	82.929	122 cm	28W	3000K	65°	Negro / Black	9005
82.830	82.930	122 cm	28W	4000K	65°	Negro / Black	
82.831	82.931	122 cm	28W	3000K	90°	Negro / Black	
82.832	82.932	122 cm	28W	4000K	90°	Negro / Black	

CARACTERÍSTICAS TÉCNICAS / TECHNICAL DATA

Potencia luminaria / Luminaire power	25.2 W / 33.6 W
Flujo luminaria / Luminaire luminous flux	2415 lm / 3220 lm (3000 K, 65°) 2579 lm / 3439 lm (4000 K, 65°)
Eficiencia lumínica / Luminous efficiency	102 lm / W
Eficiencia energética / Energetic efficiency	F
CCT	3000 K / 4000 K
CRI	> 90
UGR (4H/8H)	< 16
Dimensiones / Dimensions	122 x 4.4 x 3.2 cm

Potencia fuente de luz / Light source power	21 W / 28 W
Flujo fuente de luz / Light source luminous flux	3150 lm / 4200 lm (3000 K) 3285 lm / 4380 lm (4000 K)
Control / Control	ON/OFF - DALI
Corriente / Current	350 mA
Alimentación eléctrica / Electrical feed	220...240V, 50/60Hz
Temperatura trabajo / Operating temperature	-20°C ~ 30°C
Vida útil / Lifespan	50.000 h (L80/B10)



DATOS FOTOMÉTRICOS / PHOTOMETRIC DATA

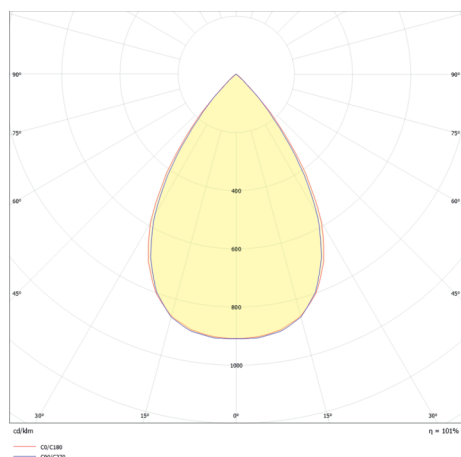
Reflector negro / Black reflector
65°
4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	14.1	14.8	14.4	15.0	15.2	13.6	14.3	13.8	14.5	14.7
2H	3H	14.0	14.6	14.3	14.8	15.1	13.5	14.1	13.7	14.3	14.6
2H	4H	13.9	14.5	14.2	14.8	15.0	13.4	14.0	13.7	14.3	14.5
2H	6H	13.8	14.4	14.1	14.7	14.9	13.3	13.9	13.6	14.2	14.4
2H	8H	13.8	14.3	14.1	14.6	14.9	13.3	13.8	13.6	14.1	14.4
2H	12H	13.8	14.3	14.1	14.6	14.9	13.2	13.8	13.6	14.1	14.4
4H	2H	13.9	14.5	14.2	14.8	15.0	13.4	14.0	13.7	14.3	14.5
4H	3H	13.8	14.3	14.1	14.6	14.9	13.3	13.8	13.6	14.1	14.4
4H	4H	13.7	14.1	14.1	14.5	14.8	13.2	13.6	13.6	13.9	14.3
4H	6H	13.6	14.0	14.0	14.3	14.7	13.1	13.5	13.5	13.8	14.2
4H	8H	13.6	13.9	14.0	14.3	14.7	13.1	13.4	13.5	13.8	14.2
4H	12H	13.5	13.8	14.0	14.2	14.6	13.0	13.3	13.5	13.7	14.1
8H	4H	13.6	13.9	14.0	14.3	14.7	13.1	13.4	13.5	13.8	14.2
8H	6H	13.5	13.7	13.9	14.1	14.6	13.0	13.2	13.4	13.6	14.1
8H	8H	13.4	13.6	13.9	14.1	14.6	12.9	13.1	13.4	13.6	14.0
8H	12H	13.4	13.6	13.9	14.0	14.5	12.9	13.1	13.4	13.5	14.0
12H	4H	13.5	13.8	14.0	14.2	14.6	13.0	13.3	13.5	13.7	14.1
12H	6H	13.4	13.6	13.9	14.1	14.6	12.9	13.1	13.4	13.6	14.0
12H	8H	13.4	13.6	13.9	14.0	14.5	12.9	13.1	13.4	13.5	14.0
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+3.9 / -18.9 +6.6 / -37.1 +8.6 / -45.4					+3.9 / -20.0 +6.6 / -36.7 +8.6 / -46.3				
standard table		BK00					BK00				
correction summand		-4.6					-5.1				
corrected glare indices based on the total luminous flux: UGR diagram according to CIE 117 with SHR 0.25											

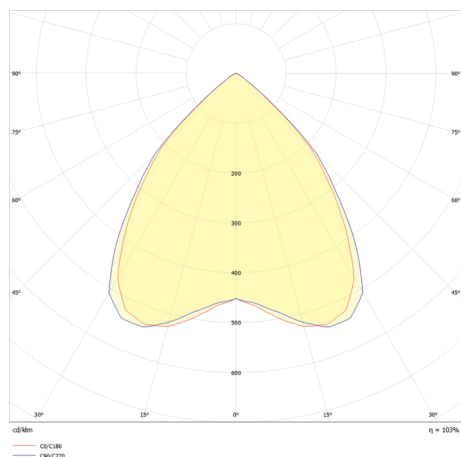
Reflector negro / Black reflector
90°
4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	19.3	20.2	19.6	20.4	20.6	19.6	20.5	19.8	20.7	20.9
2H	3H	19.2	20.0	19.5	20.2	20.5	19.4	20.3	19.7	20.5	20.7
2H	4H	19.1	19.9	19.4	20.1	20.4	19.4	20.1	19.7	20.4	20.7
2H	6H	19.0	19.7	19.3	20.0	20.3	19.3	20.0	19.6	20.3	20.6
2H	8H	19.0	19.6	19.3	19.9	20.2	19.2	19.9	19.6	20.2	20.5
2H	12H	18.9	19.6	19.3	19.9	20.2	19.2	19.8	19.6	20.2	20.5
4H	2H	19.3	20.0	19.6	20.3	20.6	19.5	20.3	19.8	20.5	20.8
4H	3H	19.1	19.8	19.5	20.1	20.4	19.4	20.0	19.7	20.3	20.6
4H	4H	19.1	19.6	19.4	19.9	20.3	19.3	19.9	19.7	20.2	20.5
4H	6H	19.0	19.4	19.4	19.8	20.2	19.2	19.7	19.6	20.1	20.5
4H	8H	18.9	19.4	19.4	19.7	20.2	19.2	19.6	19.6	20.0	20.4
4H	12H	18.9	19.3	19.3	19.7	20.1	19.2	19.5	19.6	19.9	20.4
8H	4H	18.9	19.4	19.4	19.7	20.2	19.2	19.6	19.6	20.0	20.4
8H	6H	18.9	19.2	19.3	19.6	20.1	19.1	19.4	19.6	19.9	20.3
8H	8H	18.8	19.1	19.3	19.5	20.0	19.1	19.4	19.5	19.8	20.3
8H	12H	18.8	19.0	19.2	19.5	20.0	19.0	19.3	19.5	19.7	20.2
12H	4H	18.9	19.3	19.3	19.7	20.1	19.2	19.5	19.6	19.9	20.4
12H	6H	18.8	19.1	19.3	19.5	20.0	19.1	19.4	19.5	19.8	20.3
12H	8H	18.8	19.0	19.2	19.5	20.0	19.0	19.3	19.5	19.7	20.2
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+2.0 / -6.3 +3.4 / -14.8 +4.7 / -27.5					+2.1 / -7.1 +3.3 / -16.7 +5.0 / -30.6				
standard table		BK00					BK00				
correction summand		0.8					1.0				
corrected glare indices based on the total luminous flux UGR diagram according to CIE 117 with SHR 0.25											