



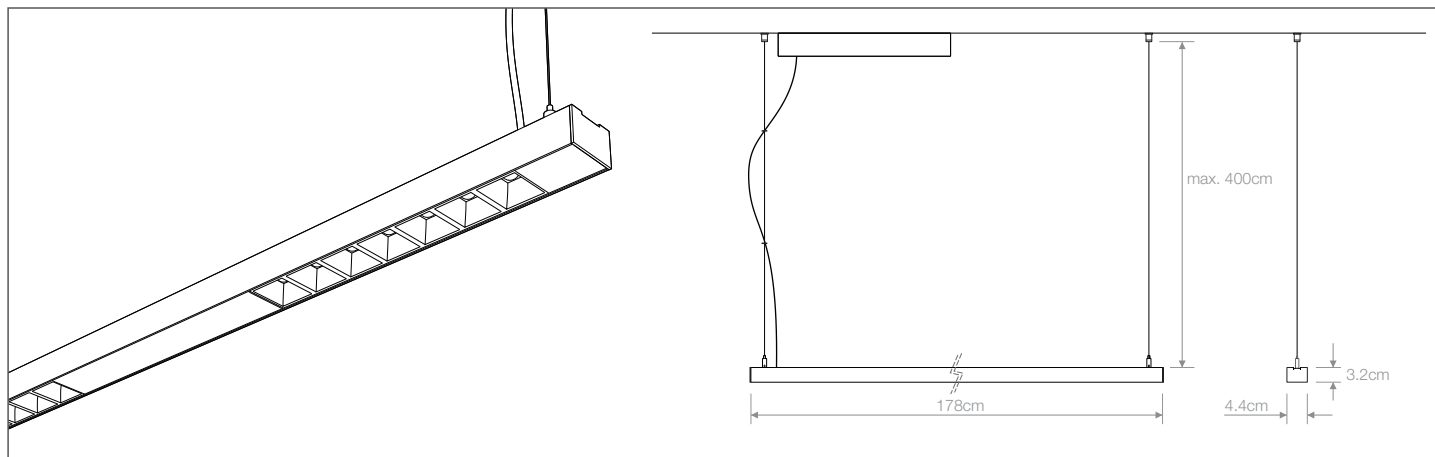

Referencia / Code		Largo / Length	Potencia / Power	Tª Color / Colour T.	Ángulo / Angle	Acabado / Finish	RAL
ON/OFF	DALI						
82.849	82.949	178 cm	28W	3000K	65°	Blanco / White	9003
82.850	82.950	178 cm	28W	4000K	65°	Blanco / White	
82.851	82.951	178 cm	28W	3000K	90°	Blanco / White	
82.852	82.952	178 cm	28W	4000K	90°	Blanco / White	
82.853	82.953	178 cm	28W	3000K	65°	Negro / Black	9005
82.854	82.954	178 cm	28W	4000K	65°	Negro / Black	
82.855	82.955	178 cm	28W	3000K	90°	Negro / Black	
82.856	82.956	178 cm	28W	4000K	90°	Negro / Black	



Referencia / Code		Largo / Length	Potencia / Power	Tª Color / Colour T.	Ángulo / Angle	Acabado / Finish	RAL
ON/OFF	DALI						
82.857	82.957	178 cm	42W	3000K	65°	Blanco / White	9003
82.858	82.958	178 cm	42W	4000K	65°	Blanco / White	
82.859	82.959	178 cm	42W	3000K	90°	Blanco / White	
82.860	82.960	178 cm	42W	4000K	90°	Blanco / White	
82.861	82.961	178 cm	42W	3000K	65°	Negro / Black	9005
82.862	82.962	178 cm	42W	4000K	65°	Negro / Black	
82.863	82.963	178 cm	42W	3000K	90°	Negro / Black	
82.864	82.964	178 cm	42W	4000K	90°	Negro / Black	

CARACTERÍSTICAS TÉCNICAS / TECHNICAL DATA

Potencia luminaria / Luminaire power	33.6 W / 50.4 W
Flujo luminaria / Luminaire luminous flux	3220 lm / 4830 lm (3000 K, 65°) 3439 lm / 5159 lm (4000 K, 65°)
Eficiencia lumínica / Luminous efficiency	102 lm / W
Eficiencia energética / Energetic efficiency	F
CCT	3000 K / 4000 K
CRI	> 90
UGR (4H/8H)	< 16
Dimensiones / Dimensions	178 x 4.4 x 3.2 cm

Potencia fuente de luz / Light source power	28 W / 42 W
Flujo fuente de luz / Light source luminous flux	4200 lm / 6300 lm (3000 K) 4380 lm / 6570 lm (4000 K)
Control / Control	ON/OFF - DALI
Corriente / Current	350 mA
Alimentación eléctrica / Electrical feed	220...240V, 50/60Hz
Temperatura trabajo / Operating temperature	-20°C ~ 30°C
Vida útil / Lifespan	50.000 h (L80/B10)



DATOS FOTOMÉTRICOS / PHOTOMETRIC DATA

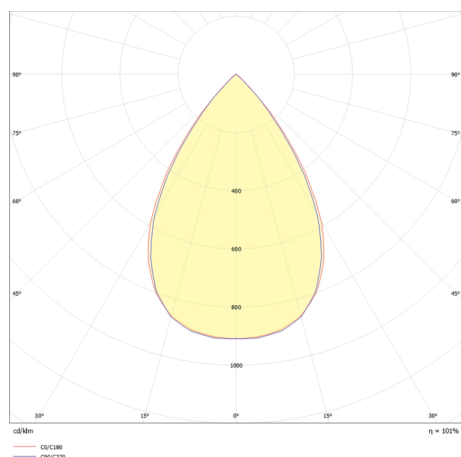
Reflector negro / Black reflector
65°
4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	14.1	14.8	14.4	15.0	15.2	13.6	14.3	13.8	14.5	14.7
2H	3H	14.0	14.6	14.3	14.8	15.1	13.5	14.1	13.7	14.3	14.6
2H	4H	13.9	14.5	14.2	14.8	15.0	13.4	14.0	13.7	14.3	14.5
2H	6H	13.8	14.4	14.1	14.7	14.9	13.3	13.9	13.6	14.2	14.4
2H	8H	13.8	14.3	14.1	14.6	14.9	13.3	13.8	13.6	14.1	14.4
2H	12H	13.8	14.3	14.1	14.6	14.9	13.2	13.8	13.6	14.1	14.4
4H	2H	13.9	14.5	14.2	14.8	15.0	13.4	14.0	13.7	14.3	14.5
4H	3H	13.8	14.3	14.1	14.6	14.9	13.3	13.8	13.6	14.1	14.4
4H	4H	13.7	14.1	14.1	14.5	14.8	13.2	13.6	13.6	13.9	14.3
4H	6H	13.6	14.0	14.0	14.3	14.7	13.1	13.5	13.5	13.8	14.2
4H	8H	13.6	13.9	14.0	14.3	14.7	13.1	13.4	13.5	13.8	14.2
4H	12H	13.5	13.8	14.0	14.2	14.6	13.0	13.3	13.5	13.7	14.1
8H	4H	13.6	13.9	14.0	14.3	14.7	13.1	13.4	13.5	13.8	14.2
8H	6H	13.5	13.7	13.9	14.1	14.6	13.0	13.2	13.4	13.6	14.1
8H	8H	13.4	13.6	13.9	14.1	14.6	12.9	13.1	13.4	13.6	14.0
8H	12H	13.4	13.6	13.9	14.0	14.5	12.9	13.1	13.4	13.5	14.0
12H	4H	13.5	13.8	14.0	14.2	14.6	13.0	13.3	13.5	13.7	14.1
12H	6H	13.4	13.6	13.9	14.1	14.6	12.9	13.1	13.4	13.6	14.0
12H	8H	13.4	13.6	13.9	14.0	14.5	12.9	13.1	13.4	13.5	14.0
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+3.9 / -18.9 +6.6 / -37.1 +8.6 / -45.4					+3.9 / -20.0 +6.6 / -36.7 +8.6 / -46.3				
standard table		BK00					BK00				
correction summand		-4.6					-5.1				
corrected glare indices based on the total luminous flux: UGR diagram according to CIE 117 with SHR 0.25											

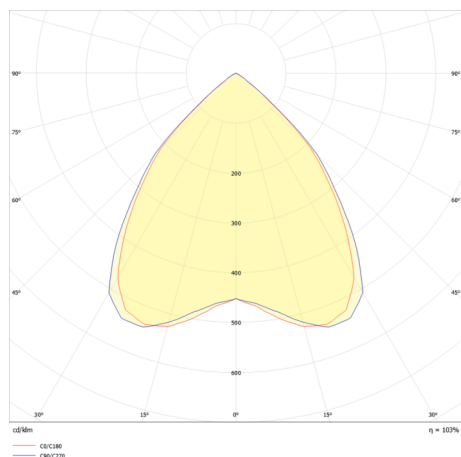
Reflector negro / Black reflector
90°
4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	19.3	20.2	19.6	20.4	20.6	19.6	20.5	19.8	20.7	20.9
2H	3H	19.2	20.0	19.5	20.2	20.5	19.4	20.3	19.7	20.5	20.7
2H	4H	19.1	19.9	19.4	20.1	20.4	19.4	20.1	19.7	20.4	20.7
2H	6H	19.0	19.7	19.3	20.0	20.3	19.3	20.0	19.6	20.3	20.6
2H	8H	19.0	19.6	19.3	19.9	20.2	19.2	19.9	19.6	20.2	20.5
2H	12H	18.9	19.6	19.3	19.9	20.2	19.2	19.8	19.6	20.2	20.5
4H	2H	19.3	20.0	19.6	20.3	20.6	19.5	20.3	19.8	20.5	20.8
4H	3H	19.1	19.8	19.5	20.1	20.4	19.4	20.0	19.7	20.3	20.6
4H	4H	19.1	19.6	19.4	19.9	20.3	19.3	19.9	19.7	20.2	20.5
4H	6H	19.0	19.4	19.4	19.8	20.2	19.2	19.7	19.6	20.1	20.5
4H	8H	18.9	19.4	19.4	19.7	20.2	19.2	19.6	19.6	20.0	20.4
4H	12H	18.9	19.3	19.3	19.7	20.1	19.2	19.5	19.6	19.9	20.4
8H	4H	18.9	19.4	19.4	19.7	20.2	19.2	19.6	19.6	20.0	20.4
8H	6H	18.9	19.2	19.3	19.6	20.1	19.1	19.4	19.6	19.9	20.3
8H	8H	18.8	19.1	19.3	19.5	20.0	19.1	19.4	19.5	19.8	20.3
8H	12H	18.8	19.0	19.2	19.5	20.0	19.0	19.3	19.5	19.7	20.2
12H	4H	18.9	19.3	19.3	19.7	20.1	19.2	19.5	19.6	19.9	20.4
12H	6H	18.8	19.1	19.3	19.5	20.0	19.1	19.4	19.5	19.8	20.3
12H	8H	18.8	19.0	19.2	19.5	20.0	19.0	19.3	19.5	19.7	20.2
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+2.0 / -6.3 +3.4 / -14.8 +4.7 / -27.5					+2.1 / -7.1 +3.3 / -16.7 +5.0 / -30.6				
standard table		BK00					BK00				
correction summand		0.8					1.0				
corrected glare indices based on the total luminous flux UGR diagram according to CIE 117 with SHR 0.25											