

Technical drawing of a wall section showing a row of square decorative elements. The wall has a total width of 200 cm. The row of squares is 2 cm high and 18 cm wide. The spacing between the squares is 28 cm. The wall is 5 cm thick.

Potencia fuente de luz / Light source power	28 W / 42 W
Flujo fuente de luz / Light source luminous flux	4200 lm / 6300 lm (3000 K) 4380 lm / 6570 lm (4000 K)
Control / Control	ON/OFF - DALI
Corriente / Current	350 mA
Alimentación eléctrica / Electrical feed	220...240V, 50/60Hz
Temperatura trabajo / Operating temperature	-20°C ~ 30°C
Vida útil / Lifespan	50.000 h (L80/B10)



DATOS FOTOMÉTRICOS / PHOTOMETRIC DATA

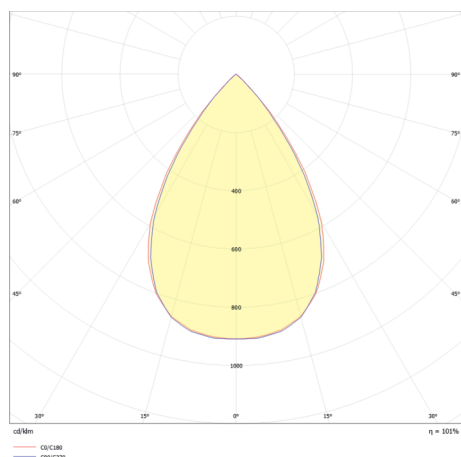

 Reflector negro / Black reflector
 65°
 4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	14.1	14.8	14.4	15.0	15.2	13.6	14.3	13.8	14.5	14.7
2H	3H	14.0	14.6	14.3	14.8	15.1	13.5	14.1	13.7	14.3	14.6
2H	4H	13.9	14.5	14.2	14.8	15.0	13.4	14.0	13.7	14.3	14.5
2H	6H	13.8	14.4	14.1	14.7	14.9	13.3	13.9	13.6	14.2	14.4
2H	8H	13.8	14.3	14.1	14.6	14.9	13.3	13.8	13.6	14.1	14.4
2H	12H	13.8	14.3	14.1	14.6	14.9	13.2	13.8	13.6	14.1	14.4
4H	2H	13.9	14.5	14.2	14.8	15.0	13.4	14.0	13.7	14.3	14.5
4H	3H	13.8	14.3	14.1	14.6	14.9	13.3	13.8	13.6	14.1	14.4
4H	4H	13.7	14.1	14.1	14.5	14.8	13.2	13.6	13.6	13.9	14.3
4H	6H	13.6	14.0	14.0	14.3	14.7	13.1	13.5	13.5	13.8	14.2
4H	8H	13.6	13.9	14.0	14.3	14.7	13.1	13.4	13.5	13.8	14.2
4H	12H	13.5	13.8	14.0	14.2	14.6	13.0	13.3	13.5	13.7	14.1
8H	4H	13.6	13.9	14.0	14.3	14.7	13.1	13.4	13.5	13.8	14.2
8H	6H	13.5	13.7	13.9	14.1	14.6	13.0	13.2	13.4	13.6	14.1
8H	8H	13.4	13.6	13.9	14.1	14.6	12.9	13.1	13.4	13.6	14.0
8H	12H	13.4	13.6	13.9	14.0	14.5	12.9	13.1	13.4	13.5	14.0
12H	4H	13.5	13.8	14.0	14.2	14.6	13.0	13.3	13.5	13.7	14.1
12H	6H	13.4	13.6	13.9	14.1	14.6	12.9	13.1	13.4	13.6	14.0
12H	8H	13.4	13.6	13.9	14.0	14.5	12.9	13.1	13.4	13.5	14.0
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+3.9 / -18.9 +6.6 / -37.1 +8.6 / -45.4					+3.9 / -20.0 +6.6 / -36.7 +8.6 / -46.3				
standard table		BK00					BK00				
correction summand		-4.6					-5.1				
corrected glare indices based on the total luminous flux: UGR diagram according to CIE 117 with SHR 0.25											

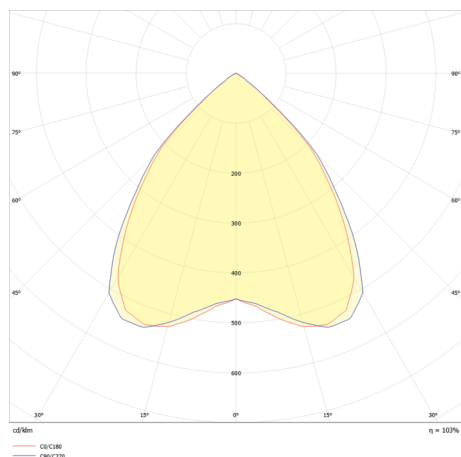

 Reflector negro / Black reflector
 90°
 4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	19.3	20.2	19.6	20.4	20.6	19.6	20.5	19.8	20.7	20.9
2H	3H	19.2	20.0	19.5	20.2	20.5	19.4	20.3	19.7	20.5	20.7
2H	4H	19.1	19.9	19.4	20.1	20.4	19.4	20.1	19.7	20.4	20.7
2H	6H	19.0	19.7	19.3	20.0	20.3	19.3	20.0	19.6	20.3	20.6
2H	8H	19.0	19.6	19.3	19.9	20.2	19.2	19.9	19.6	20.2	20.5
2H	12H	18.9	19.6	19.3	19.9	20.2	19.2	19.8	19.6	20.2	20.5
4H	2H	19.3	20.0	19.6	20.3	20.6	19.5	20.3	19.8	20.5	20.8
4H	3H	19.1	19.8	19.5	20.1	20.4	19.4	20.0	19.7	20.3	20.6
4H	4H	19.1	19.6	19.4	19.9	20.3	19.3	19.9	19.7	20.2	20.5
4H	6H	19.0	19.4	19.4	19.8	20.2	19.2	19.7	19.6	20.1	20.5
4H	8H	18.9	19.4	19.4	19.7	20.2	19.2	19.6	19.6	20.0	20.4
4H	12H	18.9	19.3	19.3	19.7	20.1	19.2	19.5	19.6	19.9	20.4
8H	4H	18.9	19.4	19.4	19.7	20.2	19.2	19.6	19.6	20.0	20.4
8H	6H	18.9	19.2	19.3	19.6	20.1	19.1	19.4	19.6	19.9	20.3
8H	8H	18.8	19.1	19.3	19.5	20.0	19.1	19.4	19.5	19.8	20.3
8H	12H	18.8	19.0	19.2	19.5	20.0	19.0	19.3	19.5	19.7	20.2
12H	4H	18.9	19.3	19.3	19.7	20.1	19.2	19.5	19.6	19.9	20.4
12H	6H	18.8	19.1	19.3	19.5	20.0	19.1	19.4	19.5	19.8	20.3
12H	8H	18.8	19.0	19.2	19.5	20.0	19.0	19.3	19.5	19.7	20.2
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+2.0 / -6.3 +3.4 / -14.8 +4.7 / -27.5					+2.1 / -7.1 +3.3 / -16.7 +5.0 / -30.6				
standard table		BK00					BK00				
correction summand		0.8					1.0				
corrected glare indices based on the total luminous flux UGR diagram according to CIE 117 with SHR 0.25											