
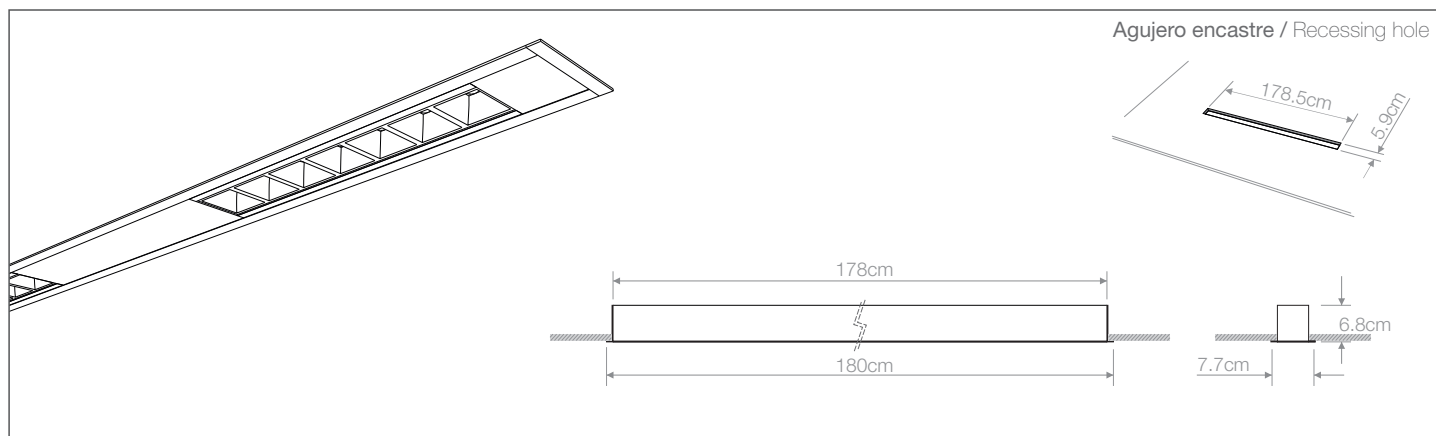


Referencia / Code		Largo / Length	Potencia / Power	Tª Color / Colour T.	Ángulo / Angle	Acabado / Finish	RAL
ON/OFF	DALI						
84.149	84.249	178 cm	28W	3000K	65°	Blanco / White	9003
84.150	84.250	178 cm	28W	4000K	65°	Blanco / White	
84.151	84.251	178 cm	28W	3000K	90°	Blanco / White	
84.152	84.252	178 cm	28W	4000K	90°	Blanco / White	
84.153	84.253	178 cm	28W	3000K	65°	Negro / Black	9005
84.154	84.254	178 cm	28W	4000K	65°	Negro / Black	
84.155	84.255	178 cm	28W	3000K	90°	Negro / Black	
84.156	84.256	178 cm	28W	4000K	90°	Negro / Black	



Referencia / Code		Largo / Length	Potencia / Power	Tª Color / Colour T.	Ángulo / Angle	Acabado / Finish	RAL
ON/OFF	DALI						
84.157	84.257	178 cm	42W	3000K	65°	Blanco / White	9003
84.158	84.258	178 cm	42W	4000K	65°	Blanco / White	
84.159	84.259	178 cm	42W	3000K	90°	Blanco / White	
84.160	84.260	178 cm	42W	4000K	90°	Blanco / White	
84.161	84.261	178 cm	42W	3000K	65°	Negro / Black	9005
84.162	84.262	178 cm	42W	4000K	65°	Negro / Black	
84.163	84.263	178 cm	42W	3000K	90°	Negro / Black	
84.164	84.264	178 cm	42W	4000K	90°	Negro / Black	

CARACTERÍSTICAS TÉCNICAS / TECHNICAL DATA

Potencia luminaria / Luminaire power	33.6 W / 50.4 W
Flujo luminaria / Luminaire luminous flux	3220 lm / 4830 lm (3000 K, 65°) 3439 lm / 5159 lm (4000 K, 65°)
Eficiencia lumínica / Luminous efficiency	102 lm / W
Eficiencia energética / Energetic efficiency	F
CCT	3000 K / 4000 K
CRI	> 90
UGR (4H/8H)	< 16
Dimensiones / Dimensions	178 x 7.7 x 6.8 cm

Potencia fuente de luz / Light source power	28 W / 42 W
Flujo fuente de luz / Light source luminous flux	4200 lm / 6300 lm (3000 K) 4380 lm / 6570 lm (4000 K)
Control / Control	ON/OFF - DALI
Corriente / Current	350 mA
Alimentación eléctrica / Electrical feed	220...240V, 50/60Hz
Temperatura trabajo / Operating temperature	-20°C ~ 30°C
Vida útil / Lifespan	50.000 h (L80/B10)



DATOS FOTOMÉTRICOS / PHOTOMETRIC DATA

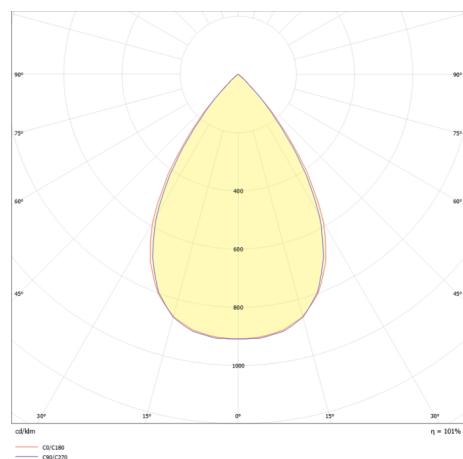
Reflector negro / Black reflector
65°
4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	14.1	14.8	14.4	15.0	15.2	13.6	14.3	13.8	14.5	14.7
2H	3H	14.0	14.6	14.3	14.8	15.1	13.5	14.1	13.7	14.3	14.6
2H	4H	13.9	14.5	14.2	14.8	15.0	13.4	14.0	13.7	14.3	14.5
2H	6H	13.8	14.4	14.1	14.7	14.9	13.3	13.9	13.6	14.2	14.4
2H	8H	13.8	14.3	14.1	14.6	14.9	13.3	13.8	13.6	14.1	14.4
2H	12H	13.8	14.3	14.1	14.6	14.9	13.2	13.8	13.6	14.1	14.4
4H	2H	13.9	14.5	14.2	14.8	15.0	13.4	14.0	13.7	14.3	14.5
4H	3H	13.8	14.3	14.1	14.6	14.9	13.3	13.8	13.6	14.1	14.4
4H	4H	13.7	14.1	14.1	14.5	14.8	13.2	13.6	13.6	13.9	14.3
4H	6H	13.6	14.0	14.0	14.3	14.7	13.1	13.5	13.5	13.8	14.2
4H	8H	13.6	13.9	14.0	14.3	14.7	13.1	13.4	13.5	13.8	14.2
4H	12H	13.5	13.8	14.0	14.2	14.6	13.0	13.3	13.5	13.7	14.1
8H	4H	13.6	13.9	14.0	14.3	14.7	13.1	13.4	13.5	13.8	14.2
8H	6H	13.5	13.7	13.9	14.1	14.6	13.0	13.2	13.4	13.6	14.1
8H	8H	13.4	13.6	13.9	14.1	14.6	12.9	13.1	13.4	13.6	14.0
8H	12H	13.4	13.6	13.9	14.0	14.5	12.9	13.1	13.4	13.5	14.0
12H	4H	13.5	13.8	14.0	14.2	14.6	13.0	13.3	13.5	13.7	14.1
12H	6H	13.4	13.6	13.9	14.1	14.6	12.9	13.1	13.4	13.6	14.0
12H	8H	13.4	13.6	13.9	14.0	14.5	12.9	13.1	13.4	13.5	14.0
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+3.9 / -18.9 +6.6 / -37.1 +8.6 / -45.4					+3.9 / -20.0 +6.6 / -36.7 +8.6 / -46.3				
standard table		BK00					BK00				
correction summand		-4.6					-5.1				
corrected glare indices based on the total luminous flux: UGR diagram according to CIE 117 with SHR 0.25											

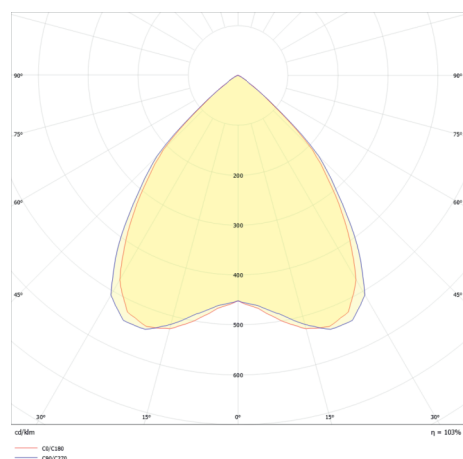
Reflector negro / Black reflector
90°
4000K

TABLA UGR / UGR TABLE

glare rating regarding UGR											
p ceiling		70	70	50	50	30	70	70	50	50	30
p walls		50	30	50	30	30	50	30	50	30	30
p floor		20	20	20	20	20	20	20	20	20	20
room size X Y		viewed crosswise					viewed endwise				
2H	2H	19.3	20.2	19.6	20.4	20.6	19.6	20.5	19.8	20.7	20.9
2H	3H	19.2	20.0	19.5	20.2	20.5	19.4	20.3	19.7	20.5	20.7
2H	4H	19.1	19.9	19.4	20.1	20.4	19.4	20.1	19.7	20.4	20.7
2H	6H	19.0	19.7	19.3	20.0	20.3	19.3	20.0	19.6	20.3	20.6
2H	8H	19.0	19.6	19.3	19.9	20.2	19.2	19.9	19.6	20.2	20.5
2H	12H	18.9	19.6	19.3	19.9	20.2	19.2	19.8	19.6	20.2	20.5
4H	2H	19.3	20.0	19.6	20.3	20.6	19.5	20.3	19.8	20.5	20.8
4H	3H	19.1	19.8	19.5	20.1	20.4	19.4	20.0	19.7	20.3	20.6
4H	4H	19.1	19.6	19.4	19.9	20.3	19.3	19.9	19.7	20.2	20.5
4H	6H	19.0	19.4	19.4	19.8	20.2	19.2	19.7	19.6	20.1	20.5
4H	8H	18.9	19.4	19.4	19.7	20.2	19.2	19.6	19.6	20.0	20.4
4H	12H	18.9	19.3	19.3	19.7	20.1	19.2	19.5	19.6	19.9	20.4
8H	4H	18.9	19.4	19.4	19.7	20.2	19.2	19.6	19.6	20.0	20.4
8H	6H	18.9	19.2	19.3	19.6	20.1	19.1	19.4	19.6	19.9	20.3
8H	8H	18.8	19.1	19.3	19.5	20.0	19.1	19.4	19.5	19.8	20.3
8H	12H	18.8	19.0	19.2	19.5	20.0	19.0	19.3	19.5	19.7	20.2
12H	4H	18.9	19.3	19.3	19.7	20.1	19.2	19.5	19.6	19.9	20.4
12H	6H	18.8	19.1	19.3	19.5	20.0	19.1	19.4	19.5	19.8	20.3
12H	8H	18.8	19.0	19.2	19.5	20.0	19.0	19.3	19.5	19.7	20.2
variation of observer position for luminaire distances S											
S = 1.0H S = 1.5H S = 2.0H		+2.0 / -6.3 +3.4 / -14.8 +4.7 / -27.5					+2.1 / -7.1 +3.3 / -16.7 +5.0 / -30.6				
standard table		BK00					BK00				
correction summand		0.8					1.0				
corrected glare indices based on the total luminous flux UGR diagram according to CIE 117 with SHR 0.25											