

Our led profile PROFESSIONAL series for surface is manufactured in 6 different colours of polycarbonate. The profile is suitable for perimetral illumination and can be used in facades, buildings or similar.


It is compatible with led strips with a maximum thickness of 15mm and a power not greater than 20W/m.

We recommend using our ecoled strips Canovelles-Vizcaya-Cob IP67- Castellón RGB in order to achieve a more uniform and homogeneous illumination.

Tests successfully passed:



- Dry heat at 60 °C for 2,000 hours
- Damp heat at 60 °C and 90% RH for 1,000 hours
- Thermal cycling between -30 °C and +65 °C

Polycarbonate profile

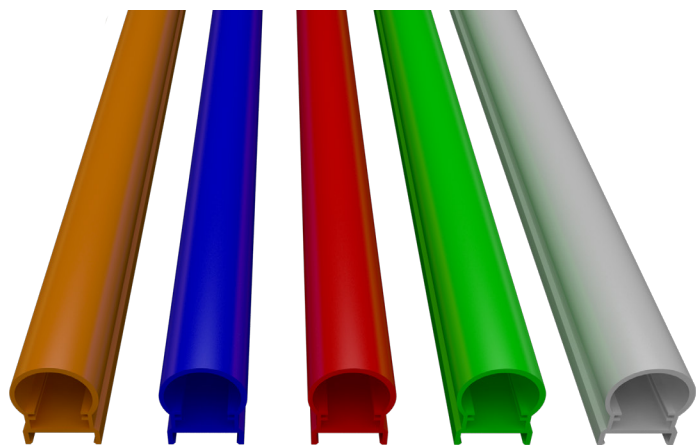


08.024 orange 118cm 08.025 blue 240cm 08.026 red 240cm 08.027 green 240cm 08.028 white 240cm

Example:

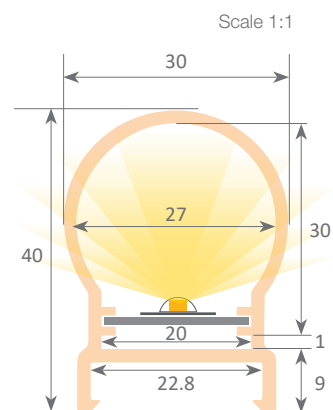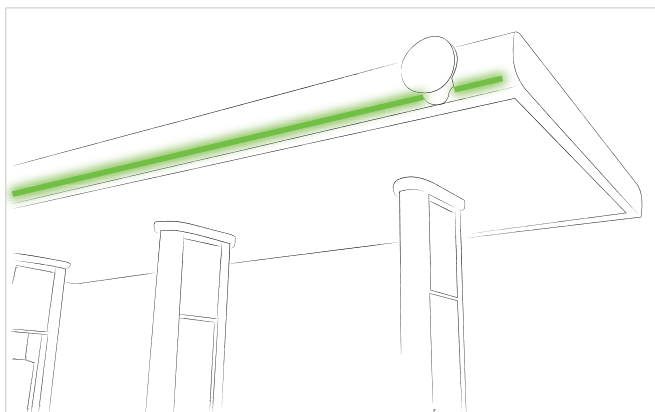

Light beam angle:

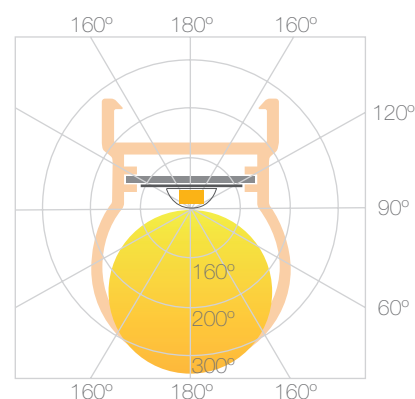

MONTERREY

Anchoring system

Complements:



Clip
20.053 polycarbonate



Junction
22.171 red
22.172 blue
22.173 white




Internal corner
22.177 red
22.178 blue
22.179 white



External corner
22.180 red
22.181 blue
22.182 white



Joint
22.174 red
22.175 blue
22.176 white

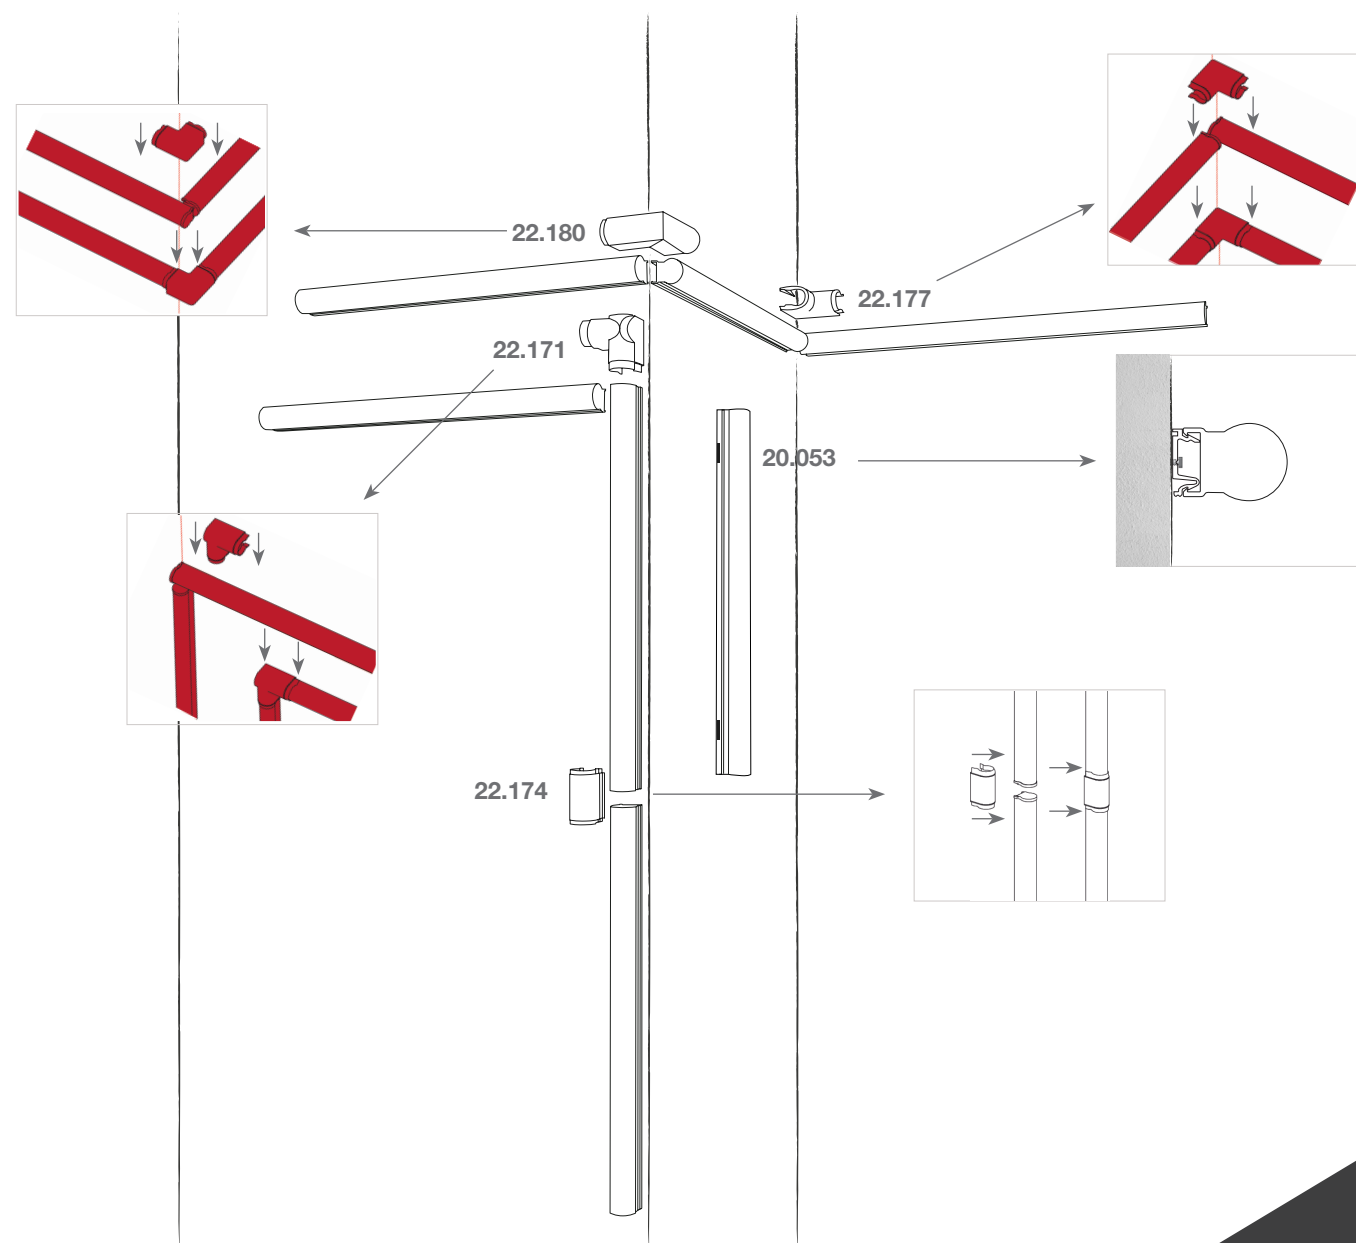


MONTERREY


Anchoring system

Step-by-step installation:


1.

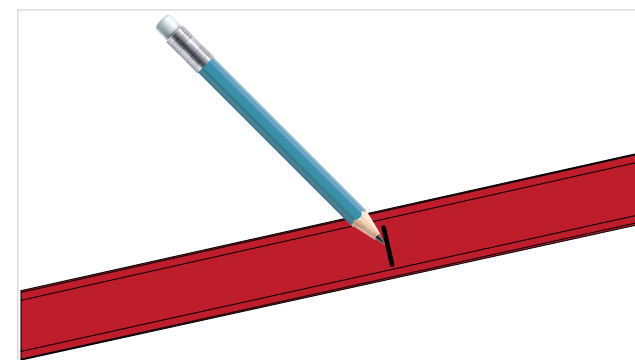


2.

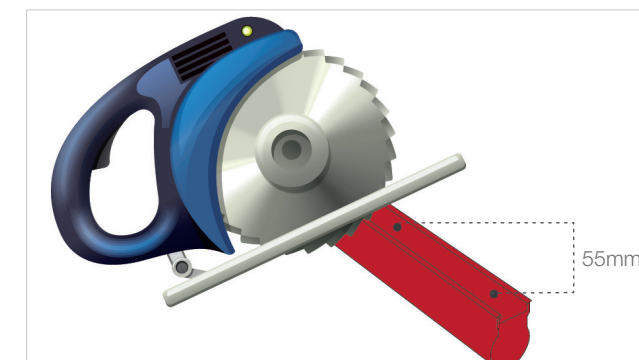


3.

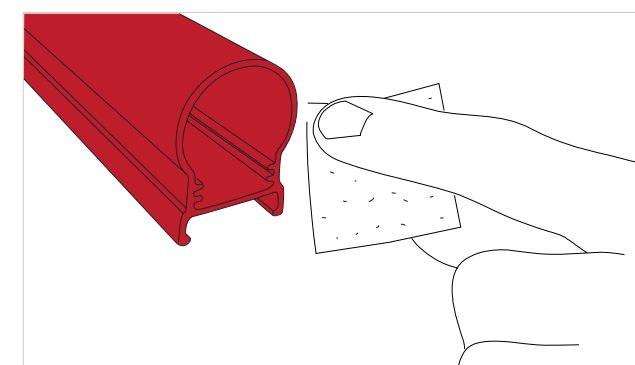


3.

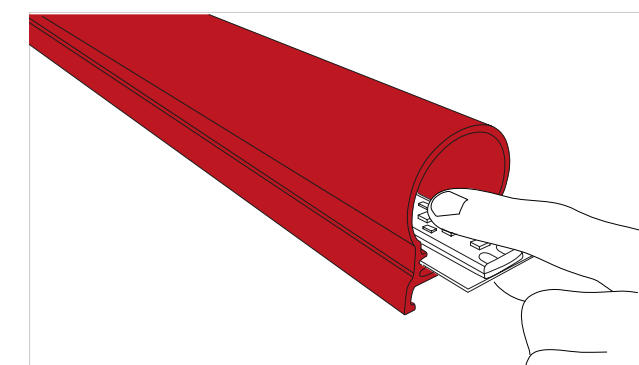


4.

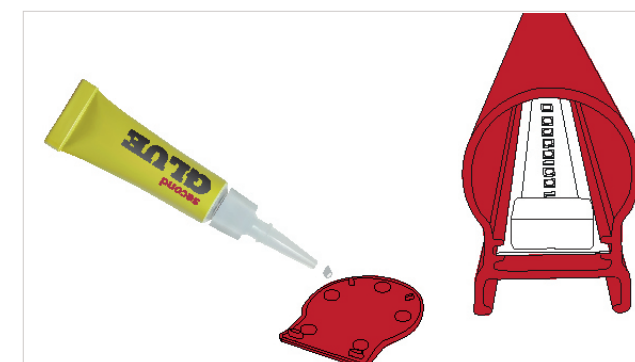

5.

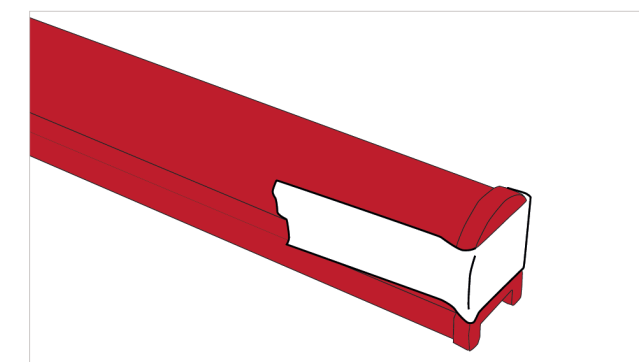


6.

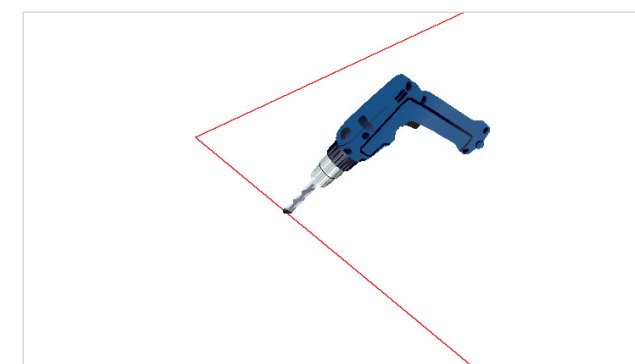


7.




8.

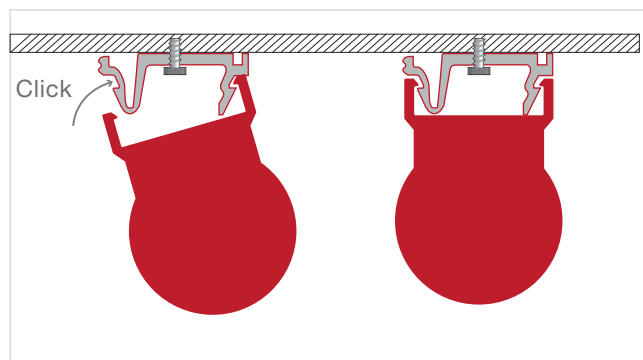


9.

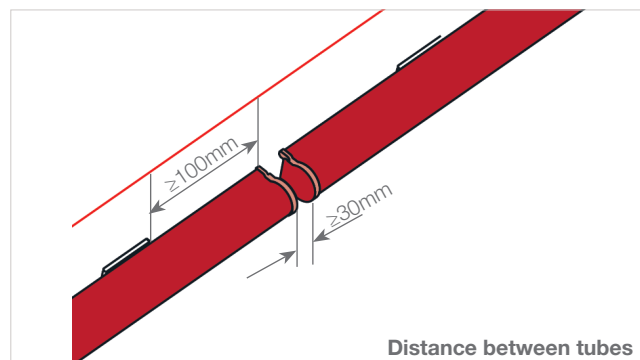


10.

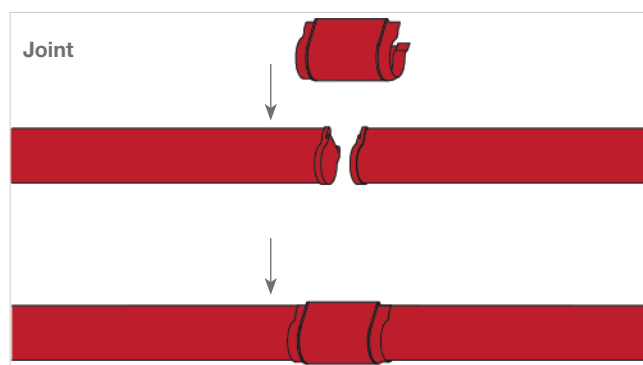


11.

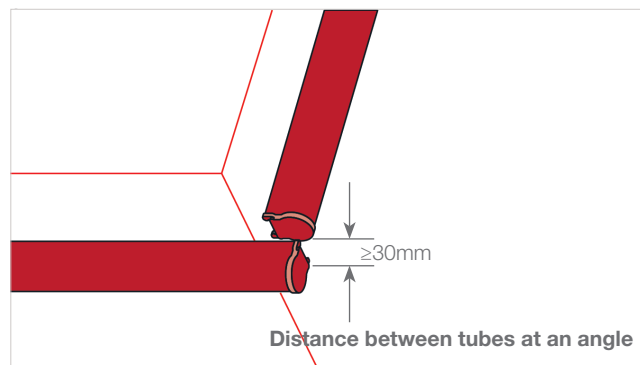

12.

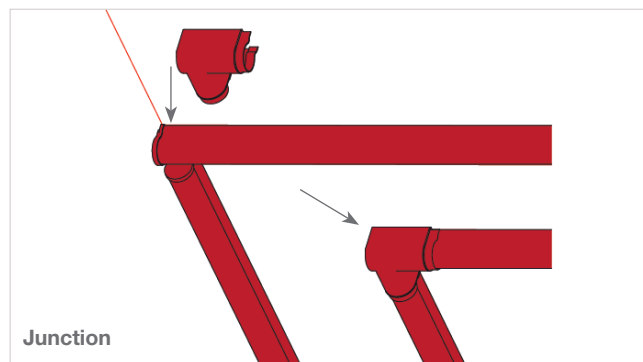

13.

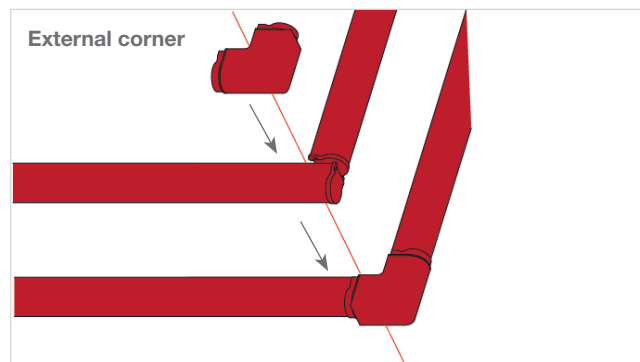

14.

