


Kiss L100

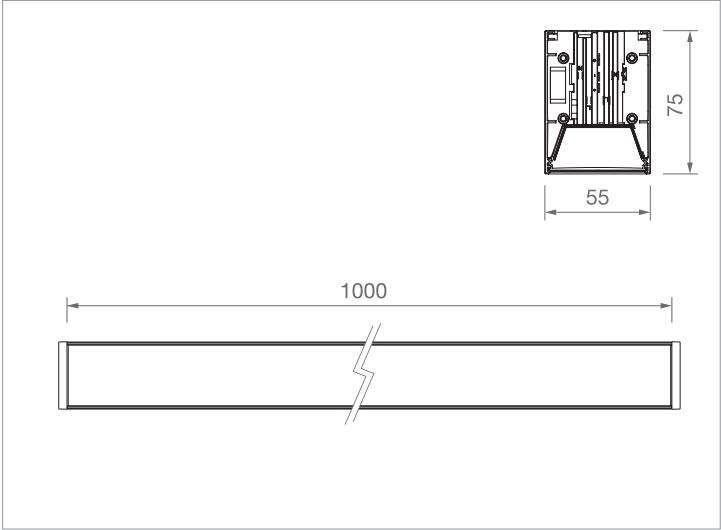

Características técnicas / Technical data

Potencia / Power	39W	Flujo luminoso / Luminous flux	3845 lm (3000K) 4247 lm (4000K) 4088 lm (5700K)
CCT select	3000K - 4000K - 5700K	Voltaje de entrada / Input voltage	220-240V
IRC / CRI	> 80	Fuente de alimentación / Power supply	Incluida / Included
Ángulo de apertura / Beam angle	110°	Sistema de Control / Control system	On/Off **
Vida útil LED / LED lifespan	50000h	Acabado / Finish	89.001  89.006 
Material / Material	Aluminio / Aluminium	** Disponible bajo pedido en versión DALI. DALI version available on request.	
Sistema óptico / Optical system	Difusor PC opal / Opal PC diffuser		
Instalación / Installation	Suspendida - Superficie / Pendant - Surface		

Incluye tapas, kit de suspensión y unión de seguridad.
Includes endcaps, suspension kit and safety joint.

