



Kiss C30

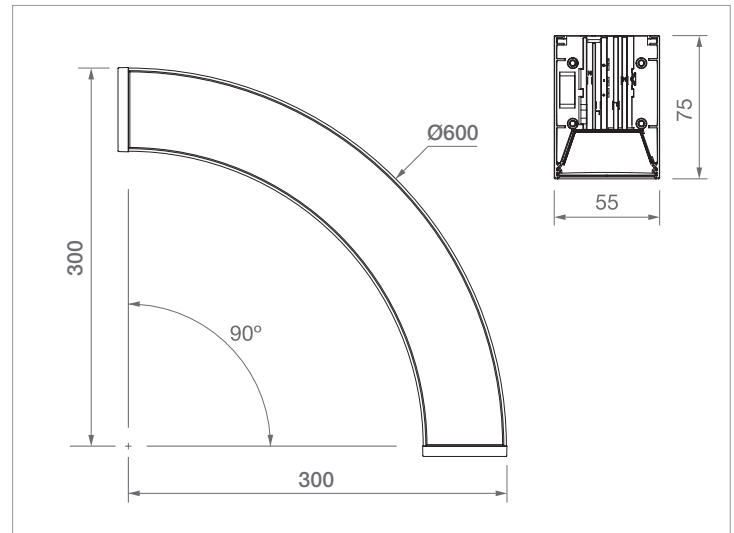

Características técnicas / Technical data

Potencia / Power	15W	Flujo luminoso / Luminous flux	1573 lm (3000K) 1736 lm (4000K) 1677 lm (5700K)
CCT select	3000K - 4000K - 5700K	Voltaje de entrada / Input voltage	220-240V
IRC / CRI	> 80	Fuente de alimentación / Power supply	Incluida / Included
Ángulo de apertura / Beam angle	110°	Sistema de Control / Control system	On/Off **
Vida útil LED / LED lifespan	50000h	Acabado / Finish	89.124  89.125 
Material / Material	Aluminio / Aluminium	** Disponible bajo pedido en versión DALI. DALI version available on request.	
Sistema óptico / Optical system	Difusor PC opal / Opal PC diffuser		
Instalación / Installation	Suspendida - Superficie / Pendant - Surface		

Incluye tapas, kit de suspensión y unión de seguridad.
Includes endcaps, suspension kit and safety joint.

Producto en fase de homologación. Consultar datos finales en página web.
Product undergoing certification. Please consult the final specifications on the website.

