


SATURNO MINI 150




On/Off

- Ref: 80.231** skyled Saturno Mini 150 lacado blanco - 6500K / skyled Saturno Mini 150 white lacquered - 6500K
Ref: 80.232 skyled Saturno Mini 150 lacado blanco - 4000K / skyled Saturno Mini 150 white lacquered - 4000K
Ref: 80.233 skyled Saturno Mini 150 lacado blanco - 2700K / skyled Saturno Mini 150 white lacquered - 2700K
Ref: 80.234 skyled Saturno Mini 150 lacado negro - 6500K / skyled Saturno Mini 150 black lacquered - 6500K
Ref: 80.235 skyled Saturno Mini 150 lacado negro - 4000K / skyled Saturno Mini 150 black lacquered - 4000K
Ref: 80.236 skyled Saturno Mini 150 lacado negro - 2700K / skyled Saturno Mini 150 black lacquered - 2700K


Colgante / Hanging

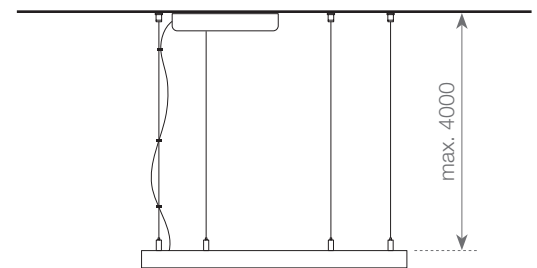


Escala 1:1 / Scale 1:1 (mm)

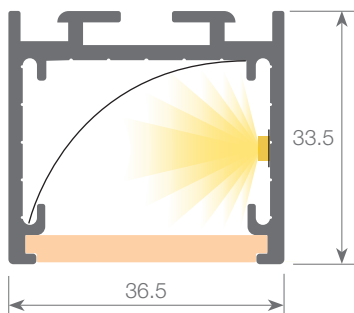

Escala 1:45 / Scale 1:45 (mm)

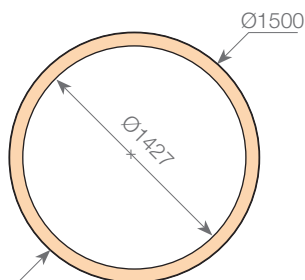

Curvas fotométricas / Photometric curves

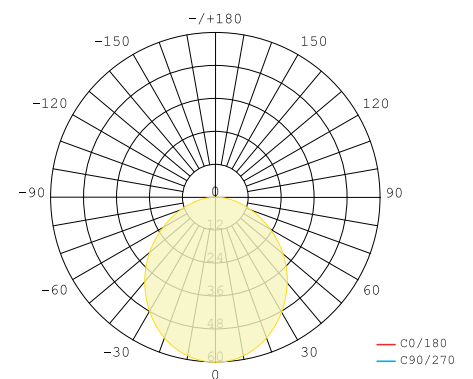

Características técnica / Technical data

Potencia luminaria / Luminaire power	78.3W	Control / Control	On-Off
Flujo luminaria / Luminaire flux	7171 lm (6500K) 6710 lm (4000K) 6094 lm (2700K)	Alimentación eléctrica / Electric feed	220-240V, 50/60Hz
Eficiencia lumínica / Luminous efficiency	85 lm/W	Sistema óptico / Optical system	difusor opal / opal cover
Eficiencia energética / Energetic efficiency	F	Material perfil / Profile material	AL6063-T5
CCT	6500K / 4000K / 2700K	Dimensiones / Measurements	Ø1500 x 36.5 x 33.5 mm
IRC / CRI	80	Temperatura trabajo / Working temperature	-20°C ~ 40°C
Ángulo de apertura / Opening angle	112°	Vida útil / Lifespan	50.000 h

