

Our BASIC led profile series is manufactured in high purity aluminium and available in silver anodised. It is ideal for indirectly lighting up aisles and walls. It can also be used in drywalls and between wooden panels to indirectly light upwards and downwards.


Suitable for led strips with a maximum width of 12mm and a power not greater than 20W/m.

In order to obtain a more homogeneous illumination, while also improving the dot free effect, we recommend combining it with our ecoled Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 2 year guarantee.

CLEVELAND

Scale 1:1

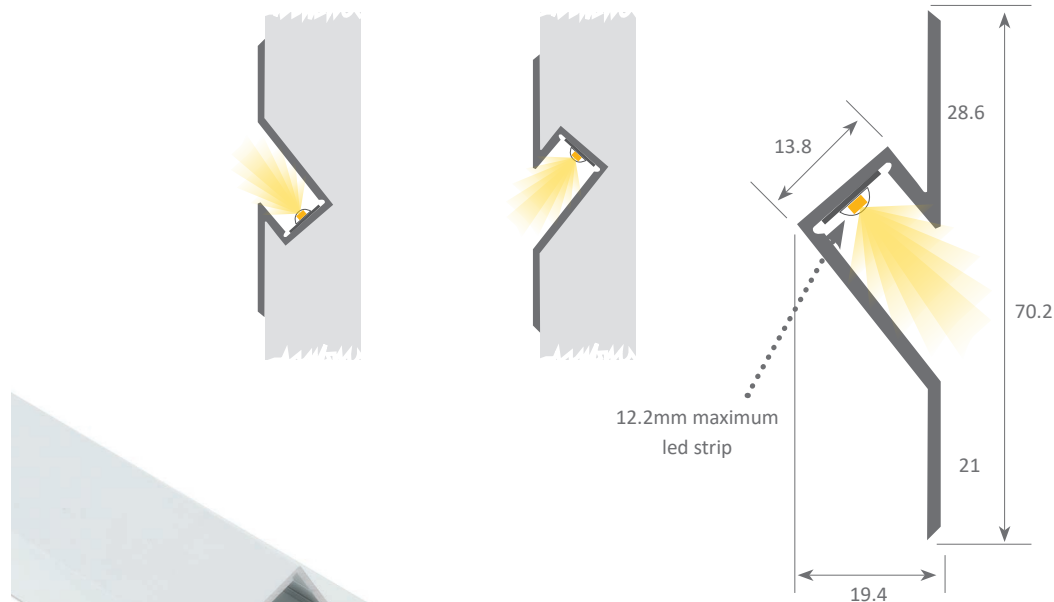

Aluminium profile


09.070 anodised silver 2m



Plastic endcaps

19.139 grey without hole

19.140 grey with hole

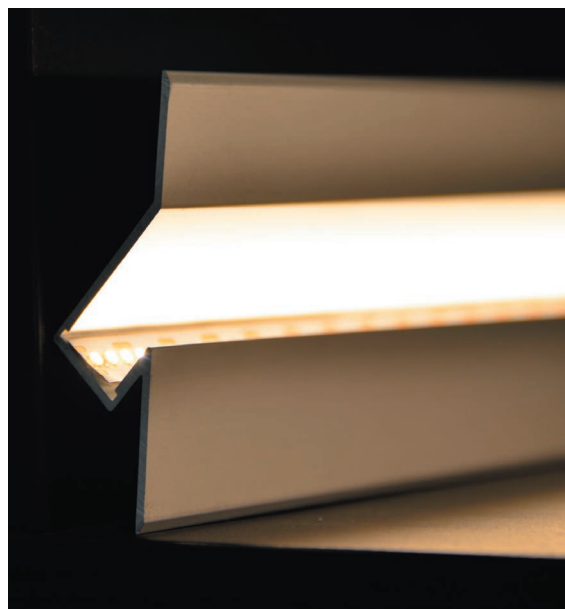

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.426kg / Alloy: 6063 / Perimeter: 201.4mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0