

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and available in silver anodised, white lacquered or black lacquered. The profile is suitable for aisles and walls, where it offers Up&Down led lighting. Its central channel houses the power supply and allows the cables to pass through for the circuit's closure, therefore reducing steep voltage drops.

Suitable for led strips with a maximum width of 25mm and a power not greater than 30W/m.

In order to obtain a more homogeneous illumination, while also improving the dot free effect, we recommend combining it with our Canovelles-Barcelona-Gomera-COB ecoled led strips. It can also be used with our rigid led strips.

**We offer a 2 year guarantee on our profiles and covers.**

## WASHINGTON



### Aluminium profile

09.054 white lacquered 3m

09.055 black lacquered 3m



### Polycarbonate cover

18.064 opal 3m



### Plastic endcaps


19.367 white without hole

19.368 black without hole



### Clip

20.025 chrome steel

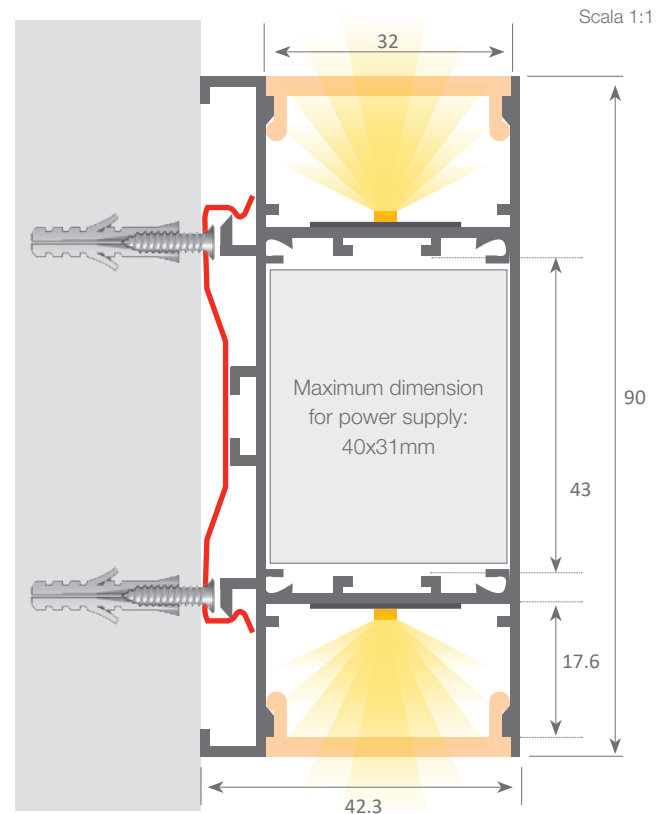

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001

Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2 / Theoretical weight: 1.450kg / Alloy: 6063

Perimeter: 641.4mm / Anodising minimum: 15 microns / Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0