

# led profile by Luz Negra

## MUNICH



IP65



Our PROFESSIONAL led profile series for surfaces/hanging applications is manufactured in high purity aluminium and silver anodised. It is also supplied in lacquered white or textured black and ideal for using on ceilings or for hanging luminaires and even on walls (providing Up&Down lighting). Drivers can be housed inside.

This profile can be combined with our "easy-ON" frosted white cover, which offers an IP65 to the luminaire, which is extremely useful in areas with high humidity levels (in this case, not suitable for our Black&White profiles). We also have available transparent and frosted microprism covers which improve glare and UGR levels.

Both profile and cover are available in 6m lengths, allowing us to carry out long installations without joints.

**We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.**



### Aluminium profile

16.005	anodised silver	6m
16.006	lacquered black	6m
16.007	lacquered white	6m



### Inner plate

22.190	aluminium	6m
22.051	for 40mm optic rigid strips	200cm



### "easy-ON" polycarbonate cover (Down)

18.074	frosted	6m
18.075	transparent microprism	6m
18.076	frosted microprism	6m



### "easy-ON" polycarbonate cover (Up)

18.001	transparent	2m
18.002	opal	2m
18.003	frosted	2m
18.004	transparent	6m
18.005	opal	6m
18.006	frosted	6m
18.134	frosted	60m



### Polycarbonate cover (Up)

18.140	frosted	2m
18.139	frosted	6m

Compatible with lacquered profiles



### Hanging kit

21.001	chrome	set of 2 units
21.002	white	set of 2 units
21.003	black	set of 2 units




### Aluminium endcaps

19.237	silver anodised
19.238	lacquered black
19.239	lacquered white

### Plastic endcaps without hole

19.242	white
--------	-------

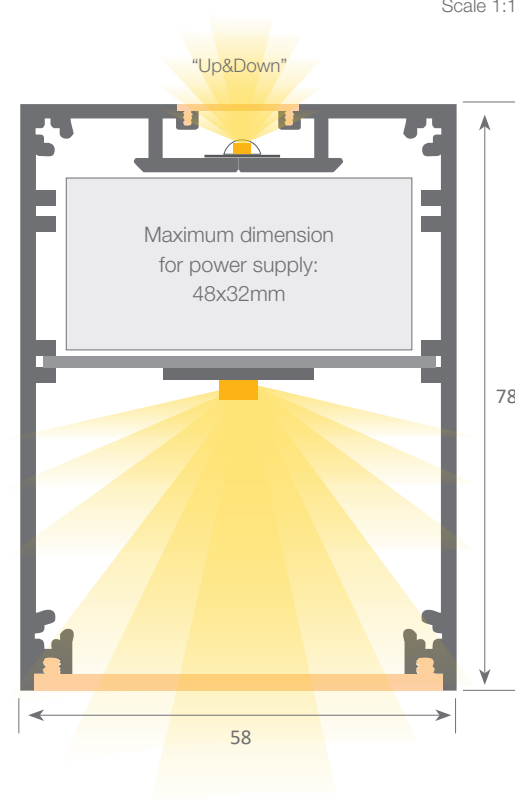

Scale 1:1



Patente Europea  
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2  
Theoretical weight: 1.350Kg / Alloy: 6063 / Perimeter: 604mm / Anodising minimum: 15 microns  
Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0