


Our PROFESSIONAL led profile series for surfaces/hanging applications is manufactured in high purity aluminium and lacquered in textured white and grey and is ideal for using on ceilings or for hanging luminaires (providing up & down lighting). Drivers can be housed inside.

This profile can offer different combinations: for use with our frosted white cover, cover with recessed tray and also with trellis or optic cover. The internal tray allows us to screw the rigid led strip on one side and enables us to house the power supply on the other. At the same time this tray can be removed from the front which means easy maintenance. For safety measures, we recommend the fixing of a braided cable from the profile base to the dissipation tray.

Both profile and cover are available in 3.4 metre lengths.

We offer a 2 year guarantee on the profiles and cover.

LIVERPOOL

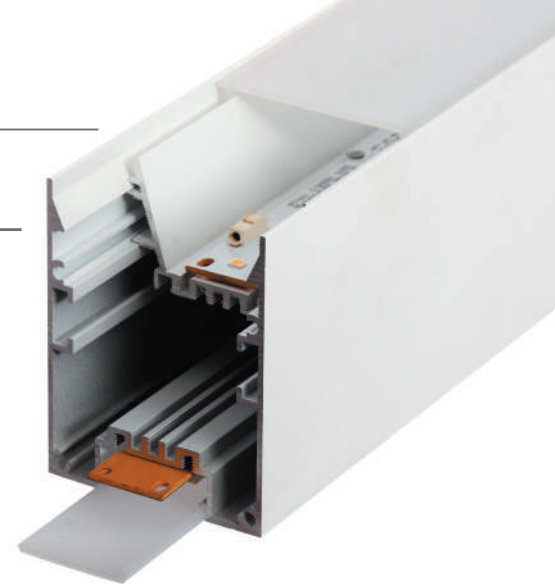

Aluminium profile

16.022	lacquered grey	3.40 m
16.023	lacquered white	3.40 m
16.036	lacquered black	3.40 m



Aluminium tray

16.024	lacquered white	3.40 m
--------	-----------------	--------



Cover

18.110	frosted	3.40 m
--------	---------	--------



Difusor de policarbonato

18.079	glaseado	3.40m
--------	----------	-------



Endcaps aluminium

19.299	grey
19.300	white
19.365	black




Hanging kit

21.001	chrome	set of 2 units
21.002	white	set of 2 units
21.003	black	set of 2 units



Safety cable

22.039	steel	18cm
--------	-------	------

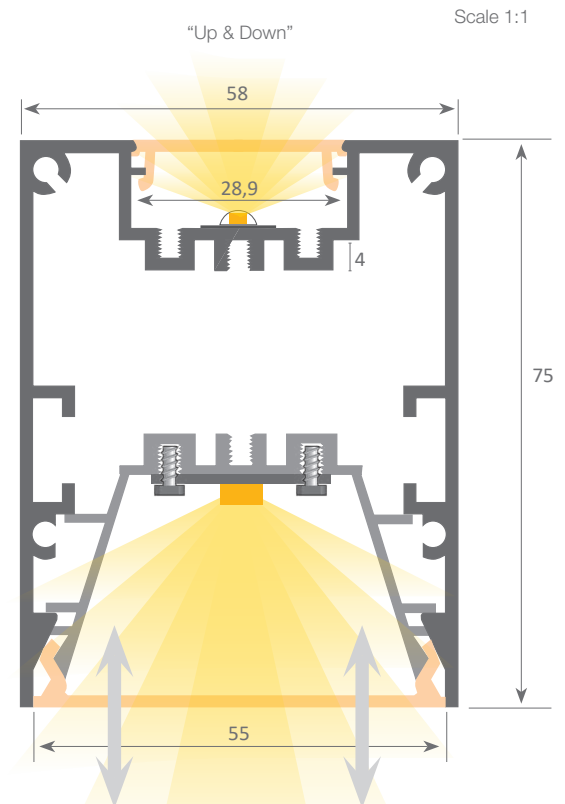

System with front removable tray which permits easy access to the led strip and power supply, therefore allowing very fast and simple maintenance of the electrical installation.



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.126 Kg. / Alloy: 6063 / Perimeter: 514 / Anodizing minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5