

GALES with OPTIC

Our PROFESSIONAL led profile series for surfaces/hanging applications is manufactured in high purity aluminium and lacquered in textured white, black and grey. Drivers can be housed inside.

This profile can be used with different types of optics (see page 307).

The internal tray allows us to screw the rigid led strip on one side and enables us to house the power supply on the other. At the same time this tray can be removed from the front which means easy maintenance. For safety measures, we recommend the fixing of a braided cable from the profile base to the dissipation tray. Both profile and cover are available in 3.4 metre lengths.

We offer a 5 year guarantee on the profiles and covers.



Aluminium profile

16.011	lacquered grey	3.40m
16.012	lacquered white	3.40m
16.013	lacquered black	3.40m



Internal tray

14.014	textured grey	3.40m
14.015	textured white	3.40m
14.026	textured black	3.40m



Optic

See page 307



Profile joints

22.219 steel



Aluminium endcaps

19.246	grey
19.247	white
19.248	black



Hanging kit


21.001	chrome	set of 2 units
21.002	white	set of 2 units
21.003	black	set of 2 units



Safety cable

22.039 steel 18cm

Scale 1:1

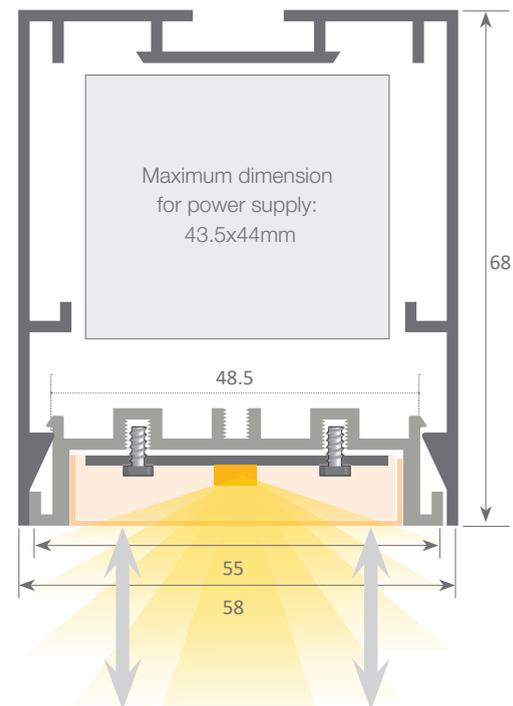

System with front removable tray which permits easy access to the led strip and power supply, therefore allowing very fast and simple maintenance of the electrical installation.



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.126 Kg. / Alloy: 6063 / Perimeter: 514 / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5