led profile by Luz Negra


Our PROFESIONAL led profile series for embedding is manufactured in high purity silver anodised and black or white lacquered textured aluminium.

Its cover ("easy-ON" system) in frosted white finishing, which offers an IP65 to the luminaire, is extremely useful in areas with high humidity levels.

Covers are also available in frosted or transparent microprism, which improve glare and also higher UGR levels. Both profile and cover are available in 6m length, allowing us to carry out long projects without joints.

We offer a 10 year guarantee on the profile and a 4 year guarantee on the covers.

Scale 1:1

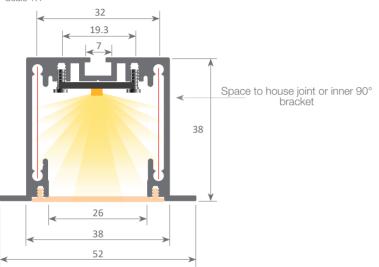







Aluminium profile

14.001	silver anodised	6m
14.002	lacquered white	6m
14.003	lacquered black	6m



Aluminium endcaps

19.186	silver anodised
19.187	lacquered white
19.188	lacquered black



Fixing bracket

20.023 for shallow recessing profiles



"easy-ON" polycarbonate cover

18.070	"easy-ON" frosted	6m
18.071	transparent microprism	6m
18.072	frosted microprism	6m
18.073	Black&White	6m




20.042 steel





Patente Europea Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2 Theoretical weight: 0,862Kg / Alloy: 6063 / Perimeter: 380mm / Anodising minimum: 15 microns Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof VØ

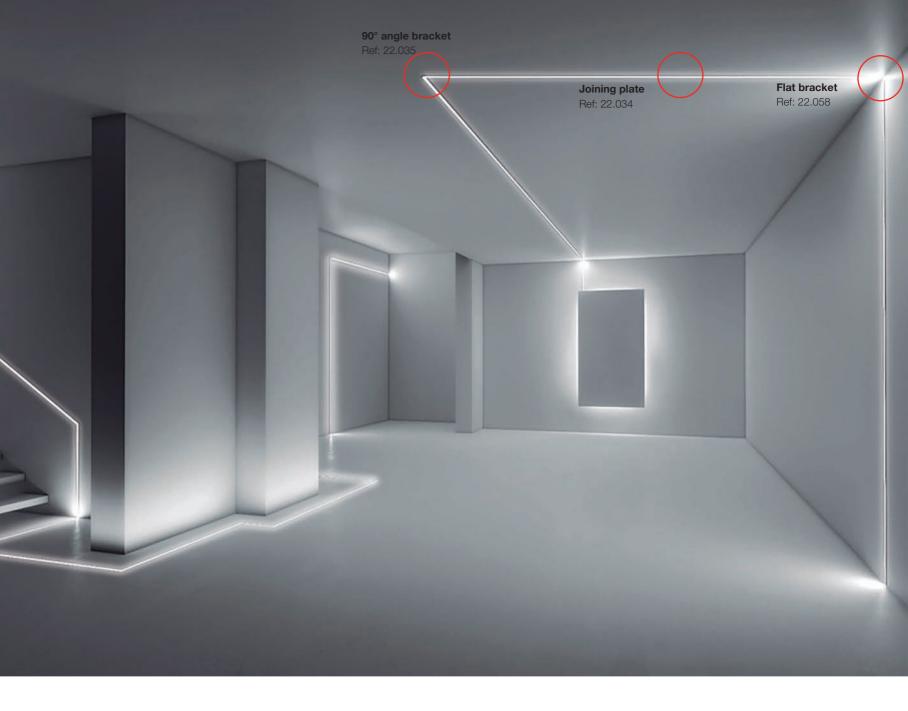



90° angle bracket 22.035 aluminium

set of 2 units



Joining plate 22.034 aluminium



Flat bracket 22.058 aluminium

set of 2 units





Patente Europea Nº.: 13156605.1 set of 2 units