

Our PROFESIONAL led profile series for embedding is manufactured in high purity silver anodised and black or white lacquered textured aluminium. Drivers can be housed inside.

This profile can be combined with our "easy-ON" frosted white cover, which offers an IP65 to the luminaire. This is extremely useful in areas with high humidity levels. We also have available transparent and frosted microprism covers which improve glare and UGR levels.




Both profile and cover are available in 6m length allowing us to carry out long projects without joints.

We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.

MOSCU SLIM




IP65

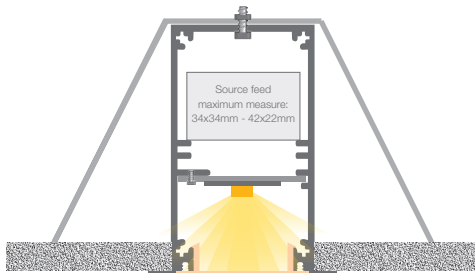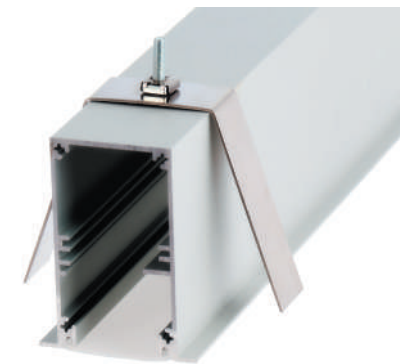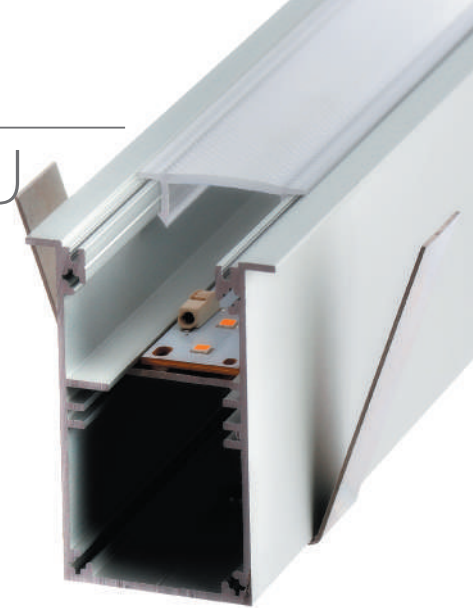

Microprism cover

18.071 transparent - 18.072 frosted

Scale 1:1

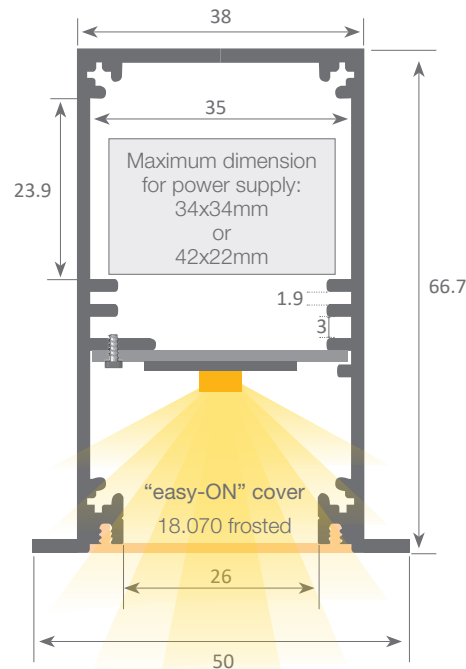

Aluminium profile

| | | |
|--------|-----------------|----|
| 15.001 | silver anodised | 6m |
| 15.002 | lacquered white | 6m |
| 15.003 | lacquered black | 6m |



"easy-ON" polycarbonate cover

| | | |
|--------|------------------------|----|
| 18.070 | frosted | 6m |
| 18.071 | transparent microprism | 6m |
| 18.072 | frosted microprism | 6m |
| 18.073 | Black&White | 6m |



Aluminium endcaps

| | |
|--------|-----------------|
| 19.189 | silver anodised |
| 19.190 | lacquered white |
| 19.191 | lacquered black |



Fixing bracket

20.043 steel



Aluminium profile

22.191 raw (6000x34x1.5mm)



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 1.048Kg / Alloy: 6063 / Perimeter: 483mm / Anodising minimum: 15 microns
Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0