

Our PROFESSIONAL led profile series for recessing is manufactured in high purity silver anodised and black or white lacquered textured aluminium. Drivers can be housed inside.

This profile can be combined with our "easy-ON" frosted white cover, which offers an IP65 to the luminaire, and it is extremely useful in areas with high humidity levels. We also have available transparent and frosted microprism covers which improve glare and UGR levels.

Both profile and cover are available in 6 metre lengths which permit long installations to be carried out without requiring joints.

**We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.**



#### Aluminium profile

14.008	anodised silver	6m
14.009	lacquered white	6m
14.010	lacquered black	6m



#### Fixing bracket

20.046	steel
Measurements: 60x75mm	



#### "easy-ON" polycarbonate cover

18.074	frosted	6m
18.075	transparent microprism	6m
18.076	frosted microprism	6m




#### Aluminium profile

22.190	raw (6000x54x1.5mm)
--------	---------------------



#### Aluminium endcaps


19.198	silver anodised
19.199	lacquered white
19.200	lacquered black




# MOSCU



IP65

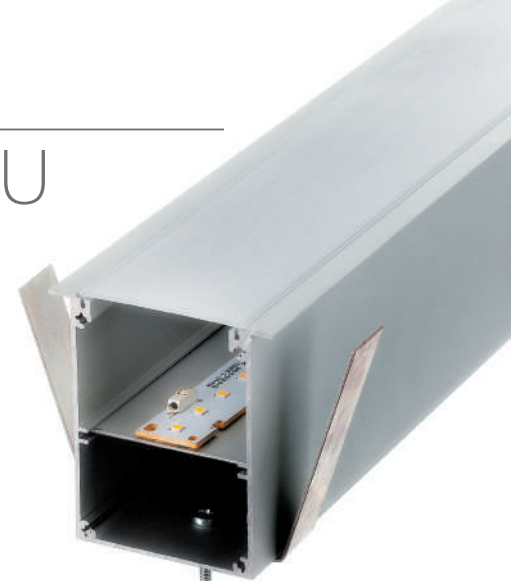

Scale 1:1

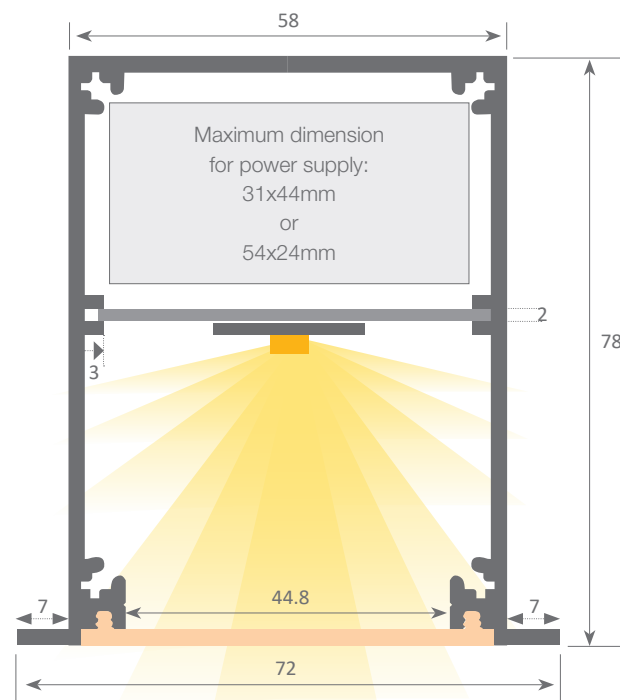

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances: UNE-EN 755-9 / UNE-EN 12020-2  
 Theoretical weight: 1.239Kg / Alloy: 6063 / Perimeter: 544mm / Anodising minimum: 15 microns  
 Purity aluminium: 95-98% / Treatment: T-5 / Covers: Fireproof V0