

ROMA



IP65

Our PROFESSIONAL led profile series for surfaces (only 11mm high) is manufactured in high purity anodised in silver, black and textured white lacquered (the profile can also be supplied in raw aluminium with no coating of paint).

The profile is ideal for using on wall surfaces, furniture, shelves and similar areas.

Its cover (available in 9 different finishings) has our "easy-ON" system; once combined with this profile it provides an IP65 rating to the luminaire.


The profile and its cover are available in lengths of 2 and 6 metre, thus allowing us to carry out large projects where all the profiles do not have joints or similar surface breaks.

It is suitable for led strips with a maximum width of 12mm, whose power level does not exceed 30W/m.

In order to obtain a more homogeneous and diffused illumination, we recommend the combined use of both our opal cover and Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.

Scale 1:1

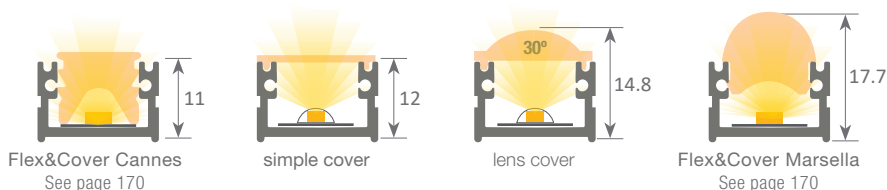

Flex&Cover Cannes
See page 170

simple cover

lens cover

Flex&Cover Marsella
See page 170

By applying the lens cover on the Roma profile together with the flexible led strip we get a beam of 30° light.



Aluminium profile

| | | |
|--------|---------------------------|----|
| 02.001 | anodised silver | 2m |
| 02.002 | anodised black | 2m |
| 02.040 | white textured lacquered* | 2m |
| 02.004 | anodised silver | 6m |
| 02.005 | anodised black | 6m |
| 02.039 | white textured lacquered* | 6m |

* This profile in white lacquered is not compatible with the easy-ON cover.



Plastic endcaps

| | |
|--------|--------------------|
| 19.016 | grey without hole |
| 19.017 | grey with hole |
| 19.018 | black without hole |
| 19.019 | black with hole |
| 19.447 | white without hole |
| 19.448 | white with hole |




Plastic endcaps

| | |
|--------|------------------------|
| 19.020 | grey without hole lens |
| 19.021 | grey with hole lens |



Scale 1:2

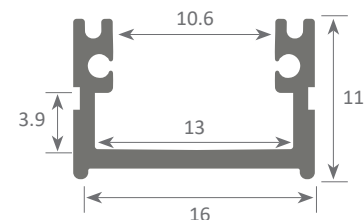


Clip

| | |
|--------|--------------------|
| 20.007 | chrome steel |
| 20.008 | black oxide finish |



Polycarbonate cover "easy-ON"

| | | |
|--------|-------------|-----|
| 18.001 | transparent | 2m |
| 18.002 | opal | 2m |
| 18.003 | frosted | 2m |
| 18.004 | transparent | 6m |
| 18.005 | opal | 6m |
| 18.006 | frosted | 6m |
| 18.134 | frosted | 60m |




Black&White cover "easy-ON"

| | | |
|--------|-------------|----|
| 18.007 | Black&White | 2m |
| 18.008 | opaque grey | 2m |
| 18.009 | Black&White | 6m |

Polycarbonate cover "easy-ON"

| | | |
|--------|------|----|
| 18.010 | lens | 2m |
| 18.011 | lens | 6m |



Polycarbonate cover

| | | |
|--------|---------|----|
| 18.140 | frosted | 2m |
| 18.139 | frosted | 6m |

Compatible with profiles in white

Polycarbonate cover "easy-ON"

| | | |
|--------|------------|----|
| 18.136 | microprism | 2m |
| 18.135 | microprism | 6m |




Methacrylate UV cover "easy-ON"

| | | |
|--------|---------|----|
| 18.179 | frosted | 2m |
| 18.178 | frosted | 6m |



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.143kg / Alloy: 6063 / Perimeter: 90mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Cover: Fireproof V0

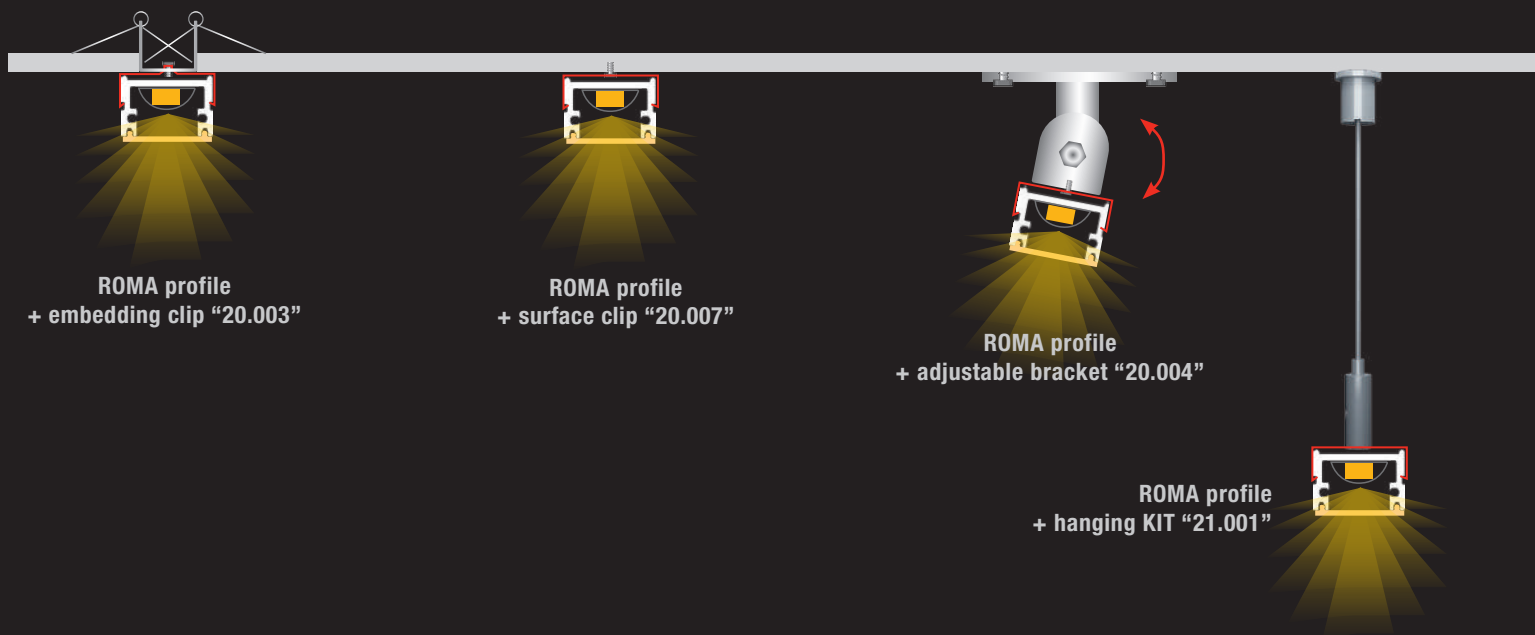

Embedding clip
20.003 chrome steel
(clip not included)



Adjustable bracket
20.004 chrome steel
(clip not included)



Hanging KIT
21.001 chrome set of 2 units
21.002 white set of 2 units
21.003 black set of 2 units
(clip not included)



90° angle bracket
22.001 steel (52x13mm)

