


led profile by Luz Negra

VISBY

Our PROFESSIONAL led profile series for surfaces and ceiling suspension is manufactured in white polycarbonate. The profile is ideal for surface applications, for example ceiling suspended luminaires, floor or wall mounted luminaires, and similar.

It is suitable for led strips with a maximum width of 15mm and a power not greater than 20W/m. In order to obtain a more homogeneous illumination, while also making the dots invisible, we recommend combining it with our Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 2 year guarantee.

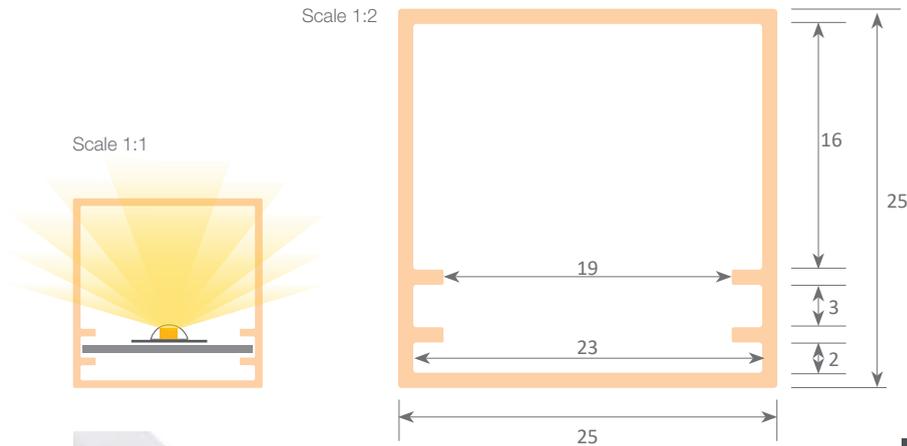

Polycarbonate profile

02.031 opal white 3m



Inner plate

22.189 raw aluminium 3m



Endcaps

19.225 without hole



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
 Theoretical weight: 0.135kg / Alloy: 6063 / Perimeter: 100mm / Anodising minimum: 15 microns
 Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)