


Our BASIC led profile series for recessing is manufactured in high purity aluminium and available in anodised silver, lacquered white, lacquered black and raw aluminium (on demand, we can supply different anodised and lacquered finishings). Ideal for embedding in furniture, shelves and similar. Suitable for led strips with a maximum width of 14mm and a power not greater than 15W/m, as there is no ventilation when embedded in wooden surfaces. We recommend using it with our Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 2 year guarantee on our profiles and covers.

Scale 1:1



Scale 1:2

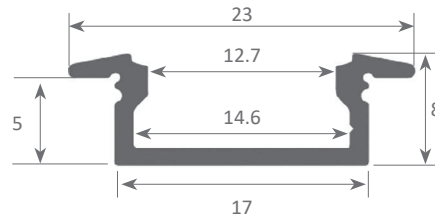

Aluminium profile

03.005	anodised silver	2m
03.006	white lacquered	2m
03.007	raw	2m
03.013	black lacquered	2m
03.008	anodised silver	6m
03.009	white lacquered	6m
03.010	raw	6m
03.012	black lacquered	6m

Plastic endcaps

19.051	white with hole
19.052	white without hole
19.053	grey with hole
19.054	grey without hole
19.445	black with hole
19.446	black without hole

* California's endcaps can also be used

Clip

20.005	transparent plastic
--------	---------------------

90° angle bracket

22.001	steel (52x13mm)
--------	-----------------



Polycarbonate cover

18.146	frosted	2m
18.148	opal	2m
18.152	transparent	2m
18.145	frosted	6m
18.147	opal	6m
18.151	transparent	6m

Methacrylate cover

18.014	transparent	2m
18.015	frosted	2m
18.016	transparent	6m
18.017	frosted	6m



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.127kg / Alloy: 6063 / Perimeter: 79mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)