


Our BASIC led profile series for recessing is manufactured in high purity aluminium and available in anodised silver, lacquered white, lacquered black and raw aluminium (on demand, we can supply different anodised and lacquered finishings). Ideal for embedding in furniture, shelving and similar, where we require a profile with a dot free effect.


Suitable for led strips with a maximum width of 14mm and a power not greater than 16W/m. We recommend using it with our Canovelles-Barcelona-Gomera-COB ecoled strips.

**We offer a 2 year guarantee on our profiles and covers.**

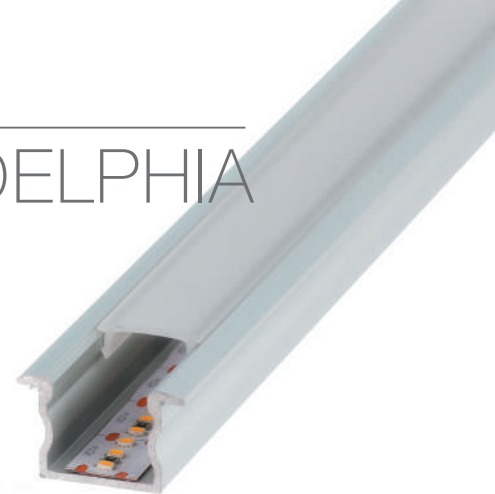

Scale 1:2

Scale 1:1

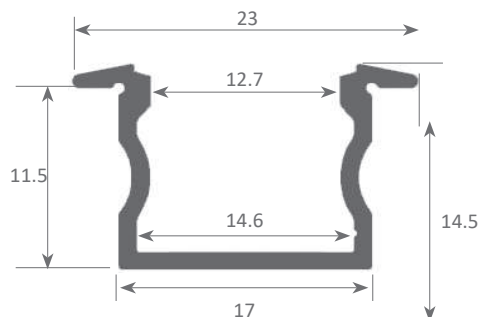

### Aluminium profile

04.009	anodised silver	2m
04.010	white lacquered	2m
04.011	raw	2m
04.021	black lacquered	2m
04.012	anodised silver	6m
04.013	white lacquered	6m
04.014	raw	6m
04.020	black lacquered	6m



### Plastic endcaps

19.061	white with hole
19.062	white without hole
19.063	grey with hole
19.064	grey without hole
19.443	black with hole
19.444	black without hole



### Clip

20.005	transparent plastic
--------	---------------------



### Polycarbonate cover

18.146	frosted	2m
18.148	opal	2m
18.152	transparent	2m
18.145	frosted	6m
18.147	opal	6m
18.151	transparent	6m



### Methacrylate cover

18.014	transparent	2m
18.015	frosted	2m
18.016	transparent	6m
18.017	frosted	6m



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2  
Theoretical weight: 0.176kg / Alloy: 6063 / Perimeter: 105mm / Anodising minimum: 15 microns  
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)