

Our BASIC led profile series for angles is high purity aluminium and available in anodised silver, lacquered white and raw aluminium (on demand, we can supply different anodised and lacquered finishings). Ideal for wall surfaces, furniture, shelving and similar areas where we require an angular and continuous light emission along with an optimum heat dissipation.

Suitable for led strips with a maximum width of 12mm and a power not greater than 30W/m.

In order to obtain a more homogeneous illumination, while also a dot free effect, we recommend the combined use of both our frosted covers and Canovelles-Barcelona-Gomera ecoled strips.


We offer a 2 year guarantee on our profiles and covers.



Scale 1:1



Scale 1:2

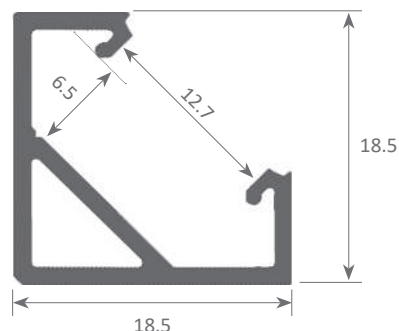

Aluminium profile

05.015	anodised silver	2m
05.016	white lacquered	2m
05.017	raw	2m
05.018	anodised silver	6m
05.019	white lacquered	6m
05.020	raw	6m



Plastic endcaps

19.073	white with hole
19.074	white without hole
19.075	grey with hole
19.076	grey without hole



Clip

20.017	transparent plastic
--------	---------------------



Adjustable bracket

20.004	chrome steel (clip not included)
--------	-------------------------------------



Polycarbonate cover

18.146	frosted	2m
18.148	opal	2m
18.152	transparent	2m
18.145	frosted	6m
18.147	opal	6m
18.151	transparent	6m



Methacrylate cover

18.014	transparent	2m
18.015	frosted	2m
18.016	transparent	6m
18.017	frosted	6m



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.213kg / Alloy: 6063 / Perimeter: 128mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)