

Our PROFESSIONAL led profile series for angles is manufactured in high purity aluminium and silver anodised. Ideal for wall surfaces, shelving and similar areas where a width greater than the standard is required. This allows us to use wider led strips for an increased heat dissipation and a wider angle of light emission.

Its "easy-ON" cover (available in 6 different finishings), when combined with this profile, provides an IP65 rating to the luminaire. Therefore, the profile can be used in places with high levels of humidity, such as bathrooms, kitchens, gyms, spas, cold storage chambers, fridges, or others.



This profile and its covers are available in lengths of 2 and 6 metres, allowing us to carry out large projects where all the profiles do not need breaks. It is suitable for led strips with a maximum width of 12mm and a power not greater than 35W/m. In order to obtain a more homogeneous and diffused illumination, we recommend the combined use of both our opal covers and Canovelles-Barcelona-Gomera-COB ecoled strips.

**We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.**

## SOPHIA XL ASYMMETRIC



IP65

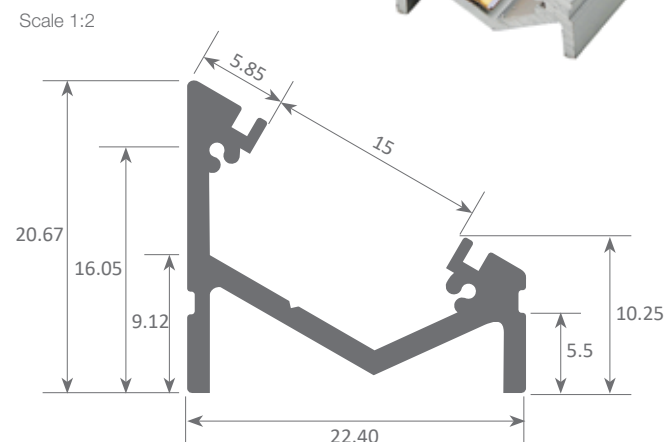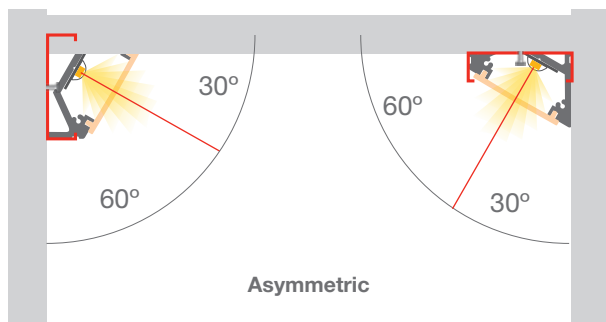

### Aluminium profile


05.007	anodised silver	2m
05.008	anodised black	2m
05.009	anodised silver	6m
05.010	anodised black	6m



### Plastic endcaps

19.545	grey
19.546	black

Scale 1:1

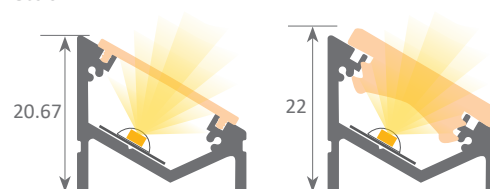

simple cover


Flex&Cover Arles

See page 170



### Polycarbonate cover "easy-ON"

18.022	transparent	2m
18.023	opal	2m
18.024	frosted	2m
18.025	transparent	6m
18.026	opal	6m
18.027	frosted	6m
18.170	frosted	60m




### Square cover

18.032	frosted	2m
18.102	Black&White	2m
18.033	frosted	6m
18.034	Black&White	6m

### Polycarbonate cover

18.127	frosted	2m
18.126	frosted	6m



### Polycarbonate cover "easy-ON"

18.130	microprism	2m
18.129	microprism	6m

### Black&White cover "easy-ON"

18.028	Black&White	2m
18.029	Black&White	6m

### Polycarbonate cover with side wings

18.132	frosted	2m
18.131	frosted	6m



### Clip

20.012	chrome steel
20.013	black oxide finish



### Methacrylate UV cover "easy-ON"

18.181	glaseado	2m
18.180	glaseado	6m



Patente Europea  
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2  
Theoretical weight: 0.251kg / Alloy: 6063 / Perimeter: 122mm / Anodising minimum: 15 microns Aluminium purity: 95-98% / Material treatment: T-5 /  
Covers: Fireproof V0