

angular led profiles



TEXAS

82



SOPHIA

83




SOPHIA XL

84



AMSTERDAM

86



SOPHIA XL
ASYMMETRIC

87



TEXAS MINI

88



ZAGREB

90



SPLIT

91

Our BASIC led profile series for angles is high purity aluminium and available in anodised silver, lacquered white and raw aluminium (on demand, we can supply different anodised and lacquered finishings). Ideal for wall surfaces, furniture, shelving and similar areas where we require an angular and continuous light emission along with an optimum heat dissipation.

Suitable for led strips with a maximum width of 12mm and a power not greater than 30W/m.

In order to obtain a more homogeneous illumination, while also a dot free effect, we recommend the combined use of both our frosted covers and Canovelles-Barcelona-Gomera ecoled strips.


We offer a 2 year guarantee on our profiles and covers.



Scale 1:1



Scale 1:2

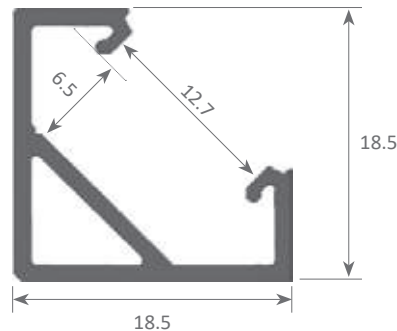

Aluminium profile

05.015	anodised silver	2m
05.016	white lacquered	2m
05.017	raw	2m
05.018	anodised silver	6m
05.019	white lacquered	6m
05.020	raw	6m



Methacrylate cover

18.014	transparent	2m
18.015	frosted	2m
18.116	opal	2m
18.018	opal	3m
18.016	transparent	6m
18.017	frosted	6m
18.115	opal	6m



Plastic endcaps

19.073	white with hole
19.074	white without hole
19.075	grey with hole
19.076	grey without hole



Adjustable bracket

20.004	chrome steel (clip not included)
--------	-------------------------------------



Clip

20.017	transparent plastic
--------	---------------------



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.213kg / Alloy: 6063 / Perimeter: 128mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)

SOPHIA



IP65

Our PROFESSIONAL led profile series for corners is manufactured in high purity anodised aluminium and available in 3 different colours. Ideal for wall surfaces, furniture, shelving and similar areas where we require an angled and continuous light emission along with optimum heat dissipation.

Its "easy-ON" cover (available in 8 different finishings), when combined with this profile, provides an IP65 rating to the luminaire. Therefore, the profile can be used in places with high levels of humidity, such as bathrooms, kitchens, gyms, spas, cold storage chambers, fridges, or others.






The profile and its covers are available in lengths of 2 and 6 metres, allowing us to carry out large projects where all the profiles do not need breaks. It is suitable for led strips with a maximum width of 13mm and a power not greater than 30W/m.

In order to obtain a more homogeneous and diffused illumination, we recommend the combined use of both our opal covers and Canovelles-Barcelona-Gomera-Cies ecoled strips.

We offer a 10 year guarantee on the profiles and a 4 year guarantee on the cover.

Scale 1:1

When applying the lens cover on the Sophia profile together with the flexible led strip we get a beam of 25° light.

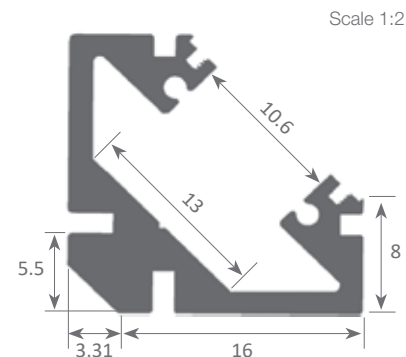

Aluminium profile

05.001	anodised silver	2m
05.002	anodised black	2m
05.004	anodised silver	6m
05.005	anodised black	6m



Plastic endcaps

19.065	grey without hole
19.066	grey with hole
19.067	black without hole
19.068	black with hole
19.069	grey without hole lens
19.070	grey with hole lens



Clip


20.015	chrome steel
20.016	black oxide finish



Hanging KIT

21.001	silver	set of 2 units
21.002	white	set of 2 units
21.003	black	set of 2 units

(clip not included)



Polycarbonate cover "easy-ON"

18.001	transparent	2m
18.002	opal	2m
18.003	frosted	2m
18.004	transparent	6m
18.005	opal	6m
18.006	frosted	6m



Black&White cover "easy-ON"

18.007	Black&White	2m
18.008	opaque grey	2m
18.009	Black&White	6m



Polycarbonate cover "easy-ON"

18.010	lens	2m
18.011	lens	6m



Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2 / Theoretical weight: 0.338kg / Alloy: 6063 / Perimeter: 137mm / Anodising minimum: 15 microns / Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0

Our PROFESSIONAL led profile series for angles is manufactured in high purity aluminium and silver anodised. Ideal for wall surfaces, shelving and similar areas where a width greater than the standard is required. This allows us to use wider led strips for an increased heat dissipation and a wider angle of light emission.

Its "easy-ON" cover (available in 6 different finishings), when combined with this profile, provides an IP65 rating to the luminaire. Therefore, the profile can be used in places with high levels of humidity, such as bathrooms, kitchens, gyms, spas, cold storage chambers, fridges, or others.

This profile and its covers are available in lengths of 2 and 6 metres, allowing us to carry out large projects where all the profiles do not need breaks. It is suitable for led strips with a maximum width of 15mm and a power not greater than 35W/m. In order to obtain a more homogeneous and diffused illumination, we recommend the combined use of both our opal covers and Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.

SOPHIA XL





IP65



Scale 1:1

By applying the lens cover on the Sophia XL profile together with the flexible led strip we get a beam of 40° light.
The information is just approximate. Please check with our technical department.

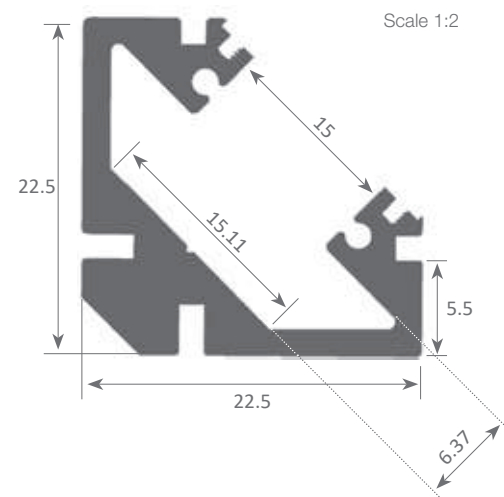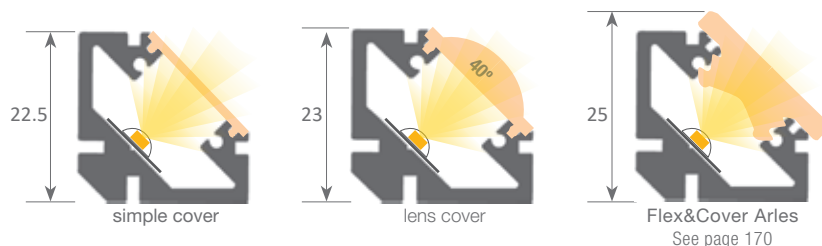

Aluminium profile

05.011	anodised silver	2m
05.012	anodised black	2m
05.013	anodised silver	6m
05.014	anodised black	6m



Plastic endcaps

19.071	grey without hole
19.072	grey with hole
19.294	black with hole
19.295	black without hole



Clip

20.012	chrome steel
20.013	black oxide finish



Polycarbonate cover "easy-ON"

18.022	transparent	2m
18.023	opal	2m
18.024	frosted	2m
18.025	transparent	6m
18.026	opal	6m
18.027	frosted	6m



Difusor Black&White "easy-ON"

18.028	Black&White	2m
18.029	Black&White	6m



Polycarbonate cover "easy-ON"

18.030	lente	2m
18.031	lente	6m




Hanging KIT

21.001	silver	set of 2 units
21.002	white	set of 2 units
21.003	black	set of 2 units (clip not included)



Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.430kg / Alloy: 6063 / Perimeter: 146mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0

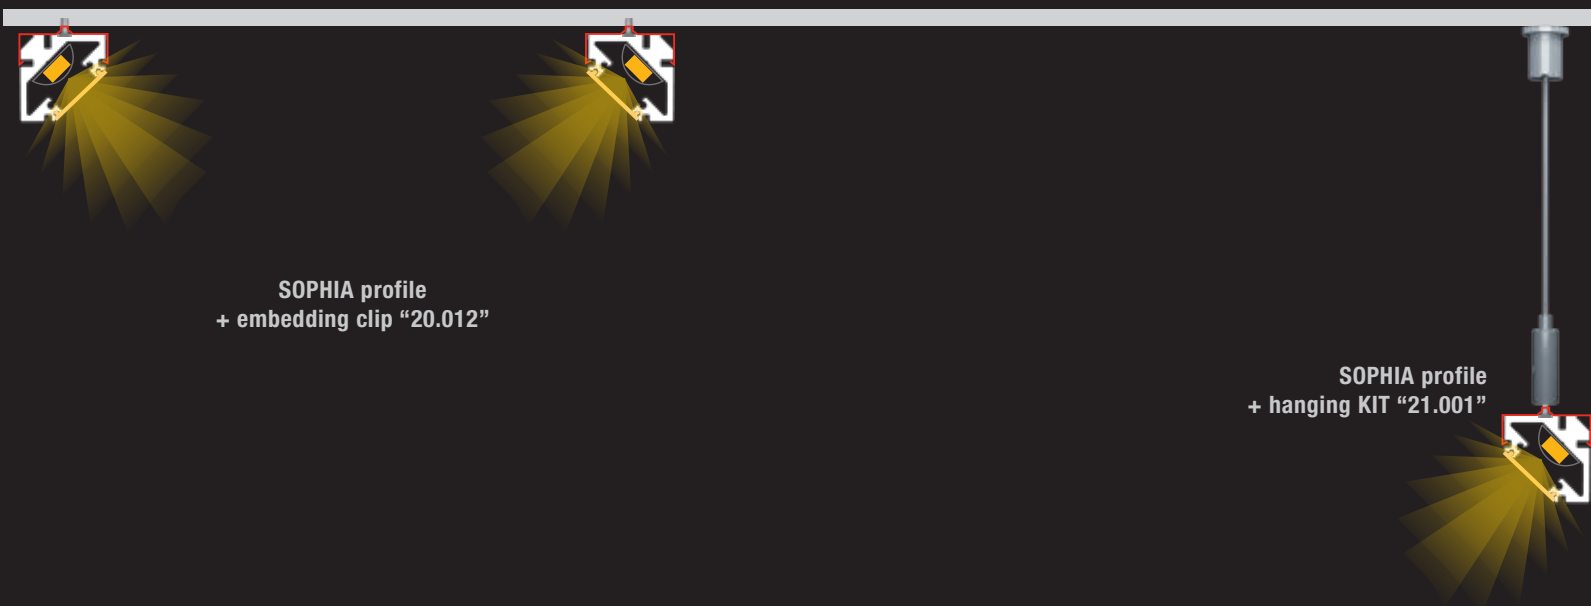

Our BASIC led profile series for angles is manufactured in high purity aluminium and available in anodized silver. Ideal for wall surfaces, furniture, shelving and similar areas where we require an angular and continuous light emission along with an optimum heat dissipation.




Suitable for led strips with a maximum width of 13.9mm and a power not greater than 20W/m.

In order to obtain a more homogeneous illumination, while also making the dots invisible, we recommend the combined use of both our frosted covers and Vizcaya-Topacio-COB ecoled strips.

We offer a 2 year guarantee on our profiles and covers.



Scale 1:1

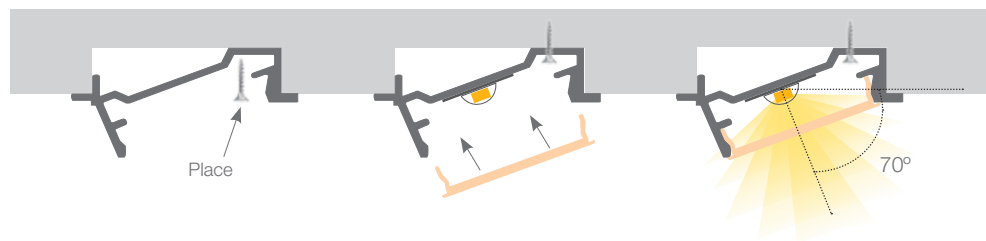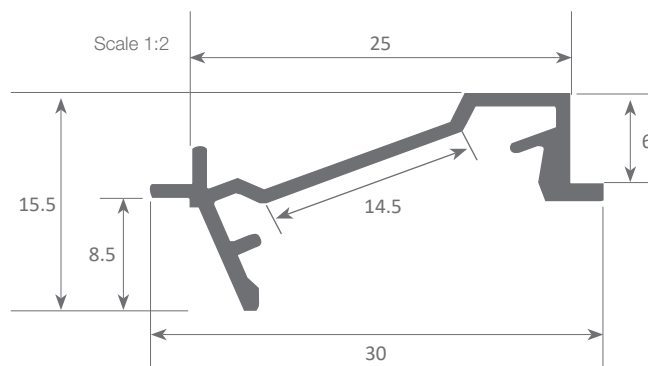

Aluminium profile

05.023 anodised silver 3m



Polycarbonate cover

18.044 opal 3m



Plastic endcaps

19.081 grey without hole
19.082 grey with hole



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - GB/T19001-2008 / Tolerances defined by: $\pm 0.2\text{mm}$
Theoretical weight: 0.138kg/m / Alloy: 6063 / Perimeter: 107.6303mm / Anodising minimum: 8-10 microns
Aluminium purity: 97-99% / Material treatment: T-5 / Covers: Fireproof V0

Our PROFESSIONAL led profile series for angles is manufactured in high purity aluminium and silver anodised. Ideal for wall surfaces, shelving and similar areas where a width greater than the standard is required. This allows us to use wider led strips for an increased heat dissipation and a wider angle of light emission.

Its "easy-ON" cover (available in 6 different finishings), when combined with this profile, provides an IP65 rating to the luminaire. Therefore, the profile can be used in places with high levels of humidity, such as bathrooms, kitchens, gyms, spas, cold storage chambers, fridges, or others.



This profile and its covers are available in lengths of 2 and 6 metres, allowing us to carry out large projects where all the profiles do not need breaks. It is suitable for led strips with a maximum width of 12mm and a power not greater than 35W/m. In order to obtain a more homogeneous and diffused illumination, we recommend the combined use of both our opal covers and Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 10 year guarantee on the profiles and a 4 year guarantee on the covers.

SOPHIA XL ASYMMETRIC



IP65

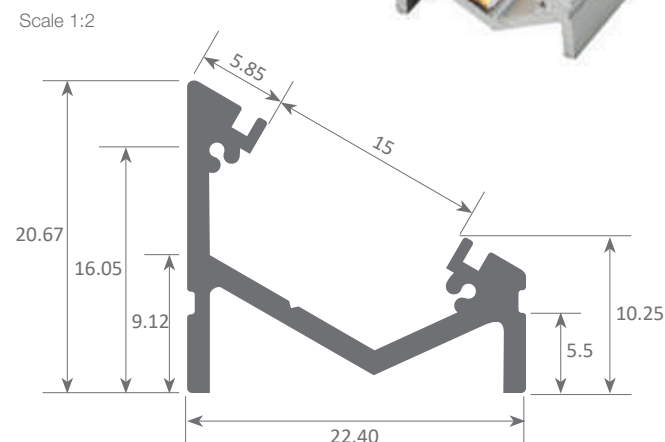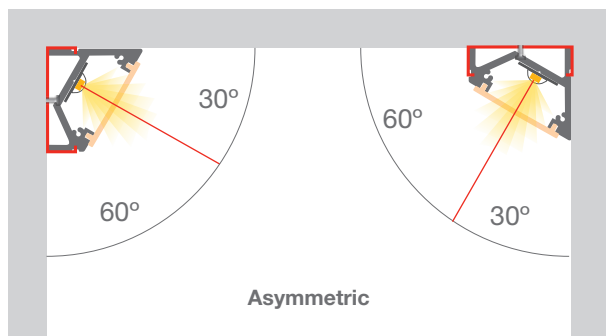

Aluminium profile


05.007	anodised silver	2m
05.008	anodised black	2m
05.009	anodised silver	6m
05.010	anodised black	6m




Clip

20.012	chrome steel
20.013	black oxide finish


Scale 1:1



simple cover



lens cover



Flex&Cover Arles
See page 170



Plastic endcaps

19.210	grey without hole
19.211	grey with hole
19.315	black without hole
19.316	black with hole



Polycarbonate cover "easy-ON"

18.022	transparent	2m
18.023	opal	2m
18.024	frosted	2m
18.025	transparent	6m
18.026	opal	6m
18.027	frosted	6m



Black&White cover "easy-ON"

18.028	Black&White	2m
18.029	Black&White	6m



Polycarbonate cover "easy-ON"

18.030	lens	2m
18.031	lens	6m



Patente Europea
Nº.: 13156605.1

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.251kg / Alloy: 6063 / Perimeter: 122mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0

Our BASIC led profile series for angles is manufactured in high purity aluminium and available in anodised silver (on demand, we can supply different anodised and lacquered finishings). Ideal for wall surfaces, furniture, shelving and similar areas where we require an angular and continuous light emission along with an optimum heat dissipation.

Suitable for led strips with a maximum width of 5mm and a power not greater than 15W/m.

In order to obtain a more homogeneous illumination, while also a dot free effect, we recommend the combined use of both our frosted covers and Cies ecoled strips.

We offer a 2 year guarantee on our profiles and covers.


TEXAS MINI



Scale 1:1



Scale 1:2



Aluminium profile

05.024 anodised silver 2m



Plastic endcaps

19.219 with hole
19.220 without hole




Polycarbonate cover

18.086 frosted 2m



Clip

20.051 anodised silver

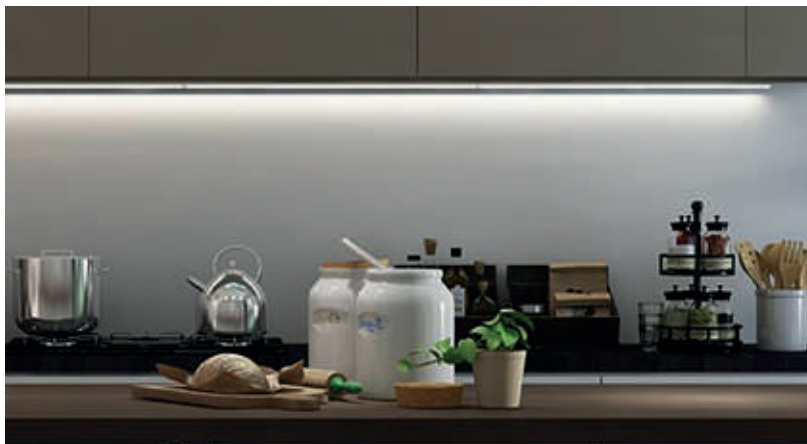

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Alloy: 6063 / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)



Our BASIC led profile series for angles is manufactured in high purity aluminium and available in anodised silver. Ideal for wall surfaces, furniture, shelving and similar areas where we require an angular and continuous light emission along with an optimum heat dissipation.

Suitable for led strips with a maximum width of 10mm and a power not greater than 20W/m.

In order to obtain a more homogeneous illumination, while also a dot free effect, we recommend the combined use of both our frosted covers and Vizcaya-Topacio-Cíes ecoled strips.

We offer a 2 year guarantee on our profiles and covers.


ZAGREB



Scale 1:1



Scale 1:2



Aluminium profile

05.021 anodised silver 3m



Plastic endcaps

19.077 grey with hole
19.078 grey without hole



Polycarbonate cover

18.042 opal 3m



Clip

20.018 plastic



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - GB/T19001-2008 / Tolerances defined by: $\pm 0.2\text{mm}$
Theoretical weight: 0.108kg/m / Alloy: 6063 / Perimeter: 65.7445mm / Anodising minimum: 8-10 microns
Aluminium purity: 97-99% / Material treatment: T-5 / Covers: Fireproof V0

Our BASIC led profile series for angles is manufactured in high purity aluminium and available in anodised silver aluminium. Ideal for wall surfaces, furniture, shelving and similar areas where we require an angular and continuous light emission along with an optimum heat dissipation. Suitable for led strips with a maximum width of 10mm and a power not greater than 20W/m. In order to obtain a more homogeneous illumination, while also a dot - free effect, we recommend the combined use of both our opal covers and Élite ecoled strips.

We offer a 2 year guarantee on our profiles and covers.


SPLIT



Scale 1:1



Scale 1:2






Aluminium profile

05.021 anodised silver 3m



Plastic endcaps

19.079 grey with hole
19.080 grey without hole



Polycarbonate cover

18.043 opal 3m



Clip

20.018 plastic



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - GB/T19001-2008 / Tolerances defined by: $\pm 0.2\text{mm}$
Theoretical weight: 0.108kg/m / Alloy: 6063 / Perimeter: 65.7445mm / Anodising minimum: 8-10 microns
Aluminium purity: 97-99% / Material treatment: T-5 / Covers: Fireproof V0