


Body / Cuerpo



Natural oak
Roble natural

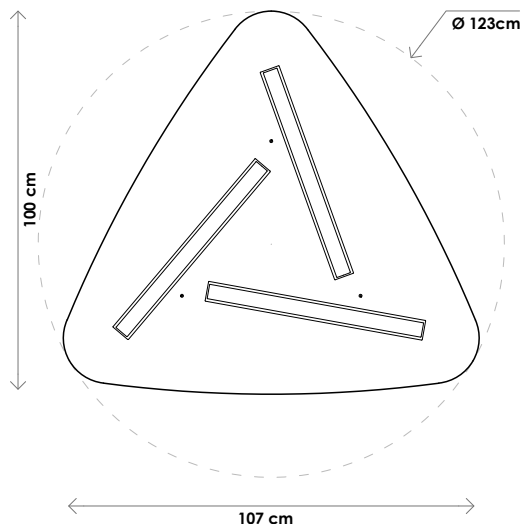

Red
Rojo
Pantone 187C



Brown
Marrón
Pantone 411U



Peach
Melocotón
Pantone 480C



White
Blanco
RAL 9016

LED Profile / Perfil LED



White
Blanco
RAL 9003



Blue
Azul
RAL 5000



Green
Verde
RAL 6004



Orange
Naranja
RAL 2003



Cashmere
Cachemira
Pantone 406U



Grey
Gris
NCS S2500N



Black
Negro
RAL 9005

DESCRIPTION

Liwi, "bola" in Quechua.

Liwi is a ceiling luminaire with a distinctive organic and modular design, offering versatility as a standalone piece or in dynamic compositions by rotating its modules.

Crafted from FSC-certified birch plywood, Liwi comes in natural oak or a range of elegant matte HPL finishes.

Engineered for energy efficiency, it delivers up to 88 lm/W with flicker-free dimming, minimizing visual fatigue and enhancing comfort, focus, and overall well-being.

Its transparent microprismatic cover boosts optical performance while significantly reducing glare.

Designed with sustainability in mind, both the long-life LED modules and driver are replaceable, extending the product's lifespan and reducing environmental impact.

MATERIALS

Certified FSC birch plywood.

Laminated surface in natural oak or HPL colours.

Black or white thermo matt laquered ALU profile. Made in Spain.

Micro prismatic cover.

LED

Max Power: 74.7W at 500mA

Color: 2700°K / 4000°K - CRI: +80

Max Flux at 2700K: 5.947Lm

Max Flux at 4000K: 6.525Lm

Lifespan: +60.000hs - Replaceable LED module.

DIMMING (Optional)

DALI / PUSH

DIMENSIONS

Ø123cm x 4.4cm

Weight: 9.55Kg

Packing: 122cm x 122cm x 10cm - 13.25Kg

WARRANTY

5 YEAR

Made in Spain

DESCRIPCIÓN

Liwi, "boleadora" en quechua.

Liwi es una luminaria de techo con un diseño orgánico y modular, que ofrece versatilidad tanto como pieza individual como en composiciones dinámicas mediante la rotación de sus módulos.

Fabricada en contrachapado de abedul con certificación FSC, Liwi está disponible en acabado roble natural o en una gama de elegantes colores HPL mate.

Diseñada para ofrecer una alta eficiencia energética, alcanza hasta 88 lm/W con regulación sin parpadeos, lo que minimiza la fatiga visual y mejora el confort, la concentración y el bienestar.

Su difusor de micropirismas transparente optimiza el rendimiento lumínico y reduce significativamente el deslumbramiento.

Pensada desde una perspectiva sostenible, la luminaria permite el reemplazo de los módulos LED de larga duración y el driver, alargando su ciclo de vida y disminuyendo su huella ambiental.

MATERIALES

Contrachapado de abedul certificado FSC.

Superficie laminada en roble natural o colores HPL.

Perfil aluminio termolacado negro o blanco mate. Fabricado en España.

Difusor de micropirismas.

LED

Potencia Máxima: 74.7W a 500mA

Color: 2700°K / 4000°K - CRI: +80

Flujo máx. a 2700K: 5.947Lm

Flujo máx. a 4000K: 6.525Lm

Vida útil: +60.000hs - Módulo LED reemplazable.

REGULACIÓN (Opcional)

DALI / PUSH

DIMENSIONES

Ø123cm x 4.4cm

Peso: 9.55Kg

Embalaje: 122cm x 122cm x 10cm - 13.25Kg

GARANTÍA

5 AÑOS

Fabricada en España

