

led profile by Luz Negra



ANTONIO

Our PROFESSIONAL led profile series for surface/hanging applications is manufactured in high purity aluminium, with 8 different colours to choose from.

Its inner tray (where we can find the led and power supply) can be removed from the front which means easy maintenance.

This profile can be combined with microprism covers both in transparent and frosted ("easy-ON" system), which improve glare and UGR levels. Both profile and covers are available in lengths of 6m, allowing us to carry out long installations without joints.

We offer a 10 year guarantee on the profiles and 4 year guarantee on the covers.

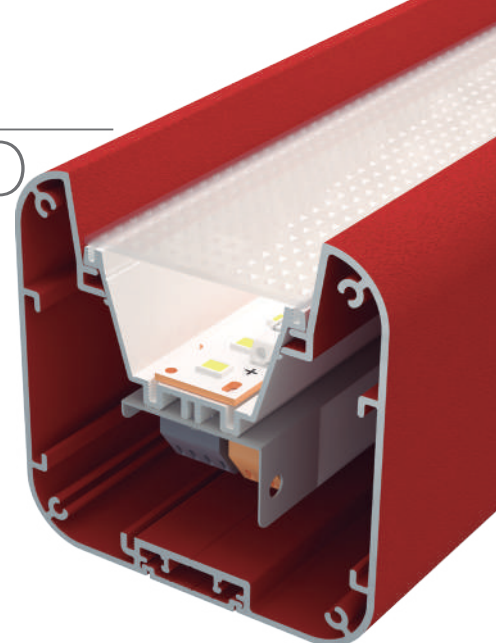

Aluminium profile

17.028	azure blue lacquered (ral 5009)	6m
17.029	white lacquered (ral 9003)	6m
17.030	black lacquered (ral 9005)	6m
17.031	patina green lacquered (ral 6000)	6m
17.032	stone grey lacquered (ral 7030)	6m
17.033	pastel yellow lacquered (ral 1034)	6m
17.034	tomato red lacquered (ral 3013)	6m
17.035	tivory lacquered (ral 1014)	6m

Inner tray

17.015	azure blue lacquered (ral 5009)	6m
17.021	patina green lacquered (ral 6000)	6m
17.022	stone grey lacquered (ral 7030)	6m
17.023	pastel yellow lacquered (ral 1034)	6m
17.024	tomato red lacquered (ral 3013)	6m
17.025	tivory lacquered (ral 1014)	6m
17.026	white lacquered (ral 9003)	6m
17.027	black lacquered (ral 9005)	6m



Aluminium tray


14.007	lacquered white	6m
14.042	lacquered black	6m



"easy-ON" polycarbonate cover

18.074	frosted	6m
18.075	transparent microprism	6m
18.076	frosted microprism	6m

Ral colours

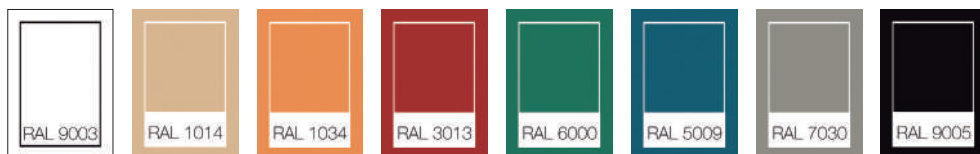


Space to house joint plates or 90° inner brackets.

Aluminium endcaps

19.412	azure blue lacquered (ral 5009)
19.413	white lacquered (ral 9003)
19.414	black lacquered (ral 9005)
19.415	patina green lacquered (ral 6000)
19.416	stone grey lacquered (ral 7030)
19.417	pastel yellow lacquered (ral 1034)
19.418	tomato red lacquered (ral 3013)
19.419	tivory lacquered (ral 1014)


Scale 1:1.3

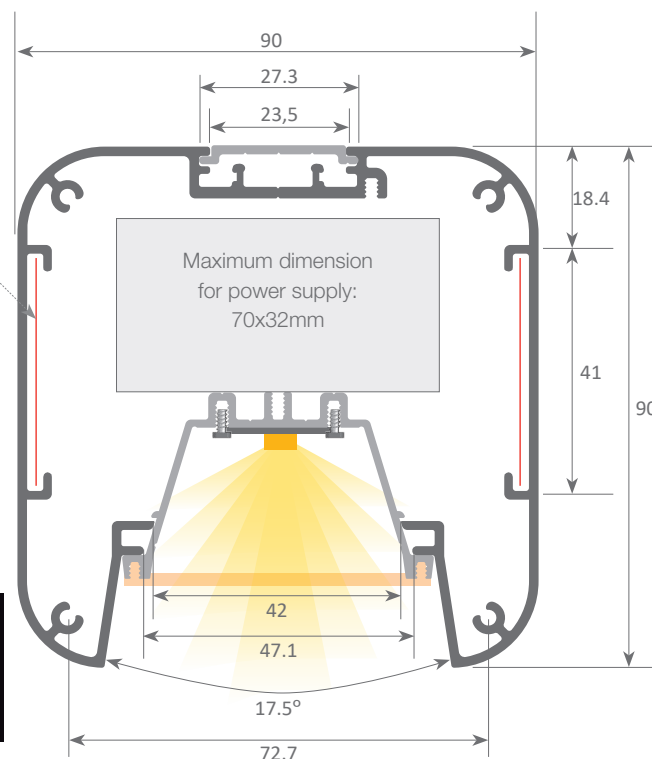


Aluminium alloy extrusion process in accordance with: ISO 9001:2015 / Tolerances: UNE-EN 755-9 / Theoretical weight: 2.303 kg / Alloy: 6063 / Perimeter: 967 mm / Anodisation minimum: 10 micras / Purity aluminium: 98.5% / Treatment: T-5



Surfaces



Hanging

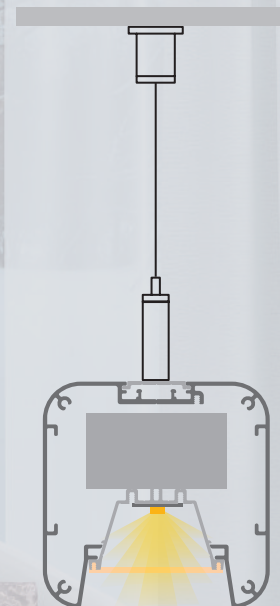

90° angle bracket

22.040 aluminium

set of 2 units



Flat bracket

22.057 aluminium


set of 2 units



Joining plate

22.041 aluminium

set of 2 units



Clip

20.007 chrome steel

20.008 black oxide finish



Hanging kit

21.001 chrome

set of 2 units

21.002 white

set of 2 units

21.003 black

set of 2 units



Safety cable

22.039 steel

18cm