

Ref: 40.002

Features:

- Protection against transient main peaks
- Electrical short-circuit protection
- Overload protection: reversible
- Protection against "no load" operation
- Degree of protection: IP20
- Protection class II
- SELV



Technical data for installation	Power (W)	30W
	Voltage (V)	220V - 240V
	Operational mains voltage limits min.	198V
	Operational mains voltage limits max.	264V
	Mains frequency for Safety min / max.	45Hz - 66Hz
	Mains frequency for Safety nom.	50Hz - 60Hz
	Maximum driver per MCB	28 pcs
	Operational mains temperature limits min / max.	-15 °C / 45°C
Performance	Current output	1.5mA
	Voltage output (V)	24V
	Output Current Tolerance min / max.	95% - 105%
	Output Voltage Tolerance	N.A
	Percent of the output current ripple	5%
	System Efficiency	88%
	Power factor	0.95
	THD	10%
	Thermal protection	110°
	Turn-on delay time	1s
Robustness	Degree of protection	IP20
	Input-output	>3.75kV
	Input-FG	N.A
	Failure rate	0.25% / 1000Hrs <0.1% - 1000h
Dimming	life by T case life	10% (failures) - 30.000 - Tc 70Deg (full load) 30.000h <10% (fail rate) Tc
	Dimmable	no
	Dimming interface DALI	no
	Push	no
	Control phase	no
	Bluetooth	no
	Dimming interface 1-10V	no
Other	Dimension	256x30x16mm
	Housing material	PC
	Weight	105g
	Guarantee	5 years



Assembly and Safety Information

Applied standards:

- EN 61347-1
- EN 61347-2-13
- EN 61547
- EN 61000-3-2
- EN 61000-3-3
- EN 62493
- EN 55015
- IEC 62384:2006
- GB24825-2009

Measurements:

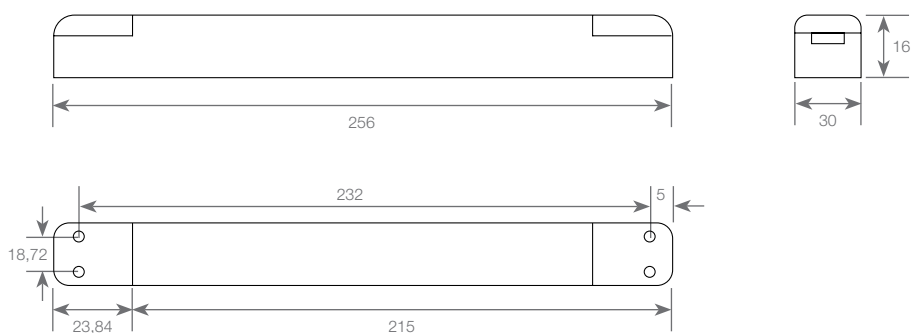


Diagram:

