


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 71.84 lm/W
MODEL	33.190	I _{max} (cd)	213.4	S/MH (C0/180)	1.33	
NOMINAL POWER (W)	20w/m	LOR (%)	100.0	S/MH (C90/270)	1.27	
RATED VOLTAGE (V)	24,4	TOTAL FLUX (lm)	697.64	η UP, DN (C0-180)	1.7,48.1	
NOMINAL FLUX (lm)	697.638	CIE CLASS	DIRECT	η UP, DN (C180-360)	1.8,48.4	
LAMPS INSIDE	1	η up (%)	3.5	CIBSE SHR NOM	1.50	
TEST VOLTAGE (V)	12,2	η down (%)	96.5	CIBSE SHR MAX	1.50	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

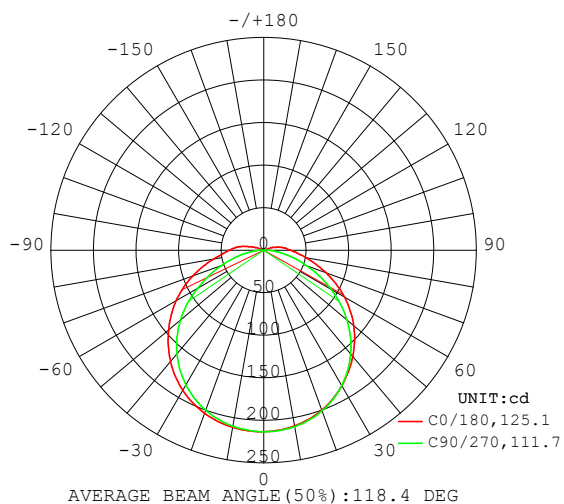

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

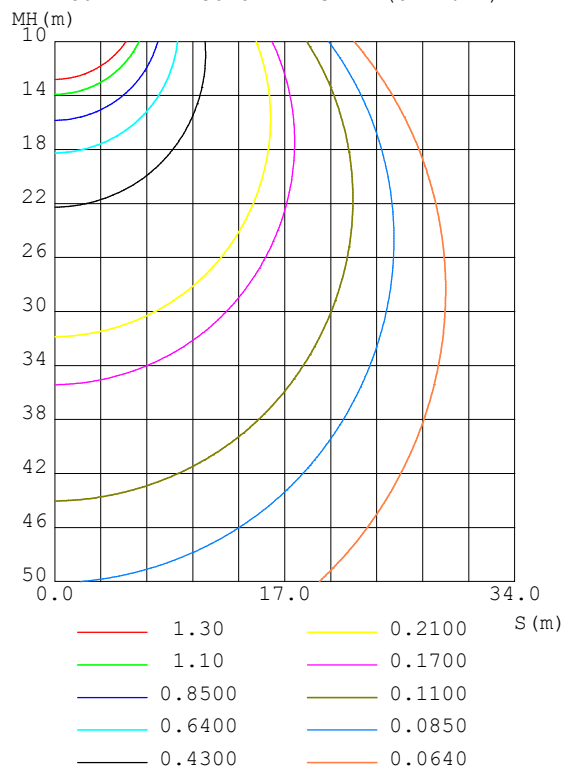

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	209.5	209.9	210.5	211.2	211.4	210.9	210.0	209.4	0- 10	20.22	20.22	2.9,2.9
20	200.0	200.2	200.7	203.1	203.9	202.4	200.0	199.5	10- 20	58.35	78.57	11.3,11.3
30	183.8	183.8	183.6	188.2	190.2	187.4	182.9	183.1	20- 30	89.50	168.1	24.1,24.1
40	163.0	160.9	159.1	167.0	170.5	166.6	158.8	160.6	30- 40	109.5	277.6	39.8,39.8
50	138.2	132.3	127.7	139.1	146.1	139.9	127.9	132.5	40- 50	115.7	393.3	56.4,56.4
60	109.4	99.65	91.24	106.3	118.9	107.7	90.28	99.88	50- 60	107.0	500.4	71.7,71.7
70	78.01	66.26	54.36	72.52	89.05	72.99	53.06	65.70	60- 70	85.04	585.4	83.9,83.9
80	50.15	37.74	23.25	42.66	59.78	43.20	22.33	37.31	70- 80	56.71	642.1	92,92
90	31.72	18.31	0.8576	21.35	40.74	22.14	0.9470	17.69	80- 90	31.26	673.4	96.5,96.5
100	20.84	9.844	0.4367	10.60	26.12	11.54	0.5114	8.712	90-100	16.25	689.6	98.9,98.9
110	9.207	4.722	0.6771	2.089	8.795	2.782	0.7601	3.050	100-110	7.812	697.4	100,100
120	0	0	0	0	0	0	0	0	110-120	0.2091	697.6	100,100
130	0	0	0	0	0	0	0	0	120-130	0	697.6	100,100
140	0	0	0	0	0	0	0	0	130-140	0	697.6	100,100
150	0	0	0	0	0	0	0	0	140-150	0	697.6	100,100
160	0	0	0	0	0	0	0	0	150-160	0	697.6	100,100
170	0	0	0	0	0	0	0	0	160-170	0	697.6	100,100
180	0	0	0	0	0	0	0	0	170-180	0	697.6	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Marçal Huguet
 Test Date:Febrero 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:37%
 Test Distance:8.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

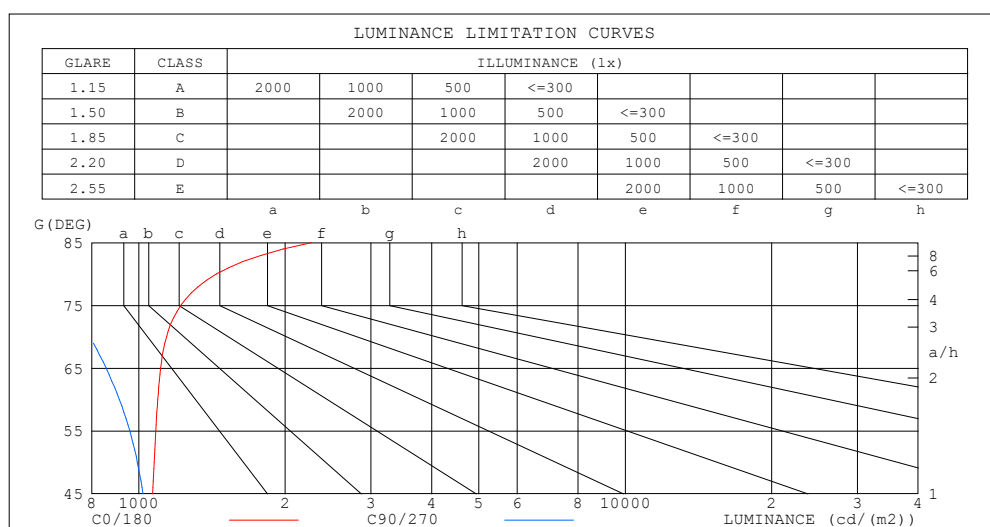

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	2267	650
80	1444	670
75	1220	728
70	1141	795
65	1109	857
60	1094	912
55	1084	959
50	1075	993
45	1068	1020


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Coefficients of Utilization(CU)												
0.0	1.18	1.18	1.18	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.97
1.0	1.01	.96	.92	.99	.94	.90	.94	.90	.87	.89	.86	.84	.85	.83	.80	.78
2.0	.88	.80	.74	.85	.79	.73	.81	.76	.71	.77	.73	.69	.74	.70	.66	.64
3.0	.77	.68	.61	.75	.67	.60	.71	.64	.59	.68	.62	.57	.65	.60	.56	.53
4.0	.68	.58	.51	.66	.57	.51	.63	.56	.50	.60	.54	.49	.58	.52	.48	.45
5.0	.60	.51	.44	.59	.50	.44	.56	.49	.43	.54	.47	.42	.52	.46	.41	.39
6.0	.54	.45	.38	.53	.44	.38	.51	.43	.37	.49	.42	.37	.47	.41	.36	.34
7.0	.49	.40	.34	.48	.39	.33	.46	.38	.33	.44	.37	.32	.43	.37	.32	.30
8.0	.45	.36	.30	.44	.35	.30	.42	.35	.29	.41	.34	.29	.39	.33	.29	.27
9.0	.41	.32	.27	.40	.32	.27	.39	.31	.26	.37	.31	.26	.36	.30	.26	.24
10.0	.38	.30	.24	.37	.29	.24	.36	.29	.24	.35	.28	.24	.33	.28	.23	.21

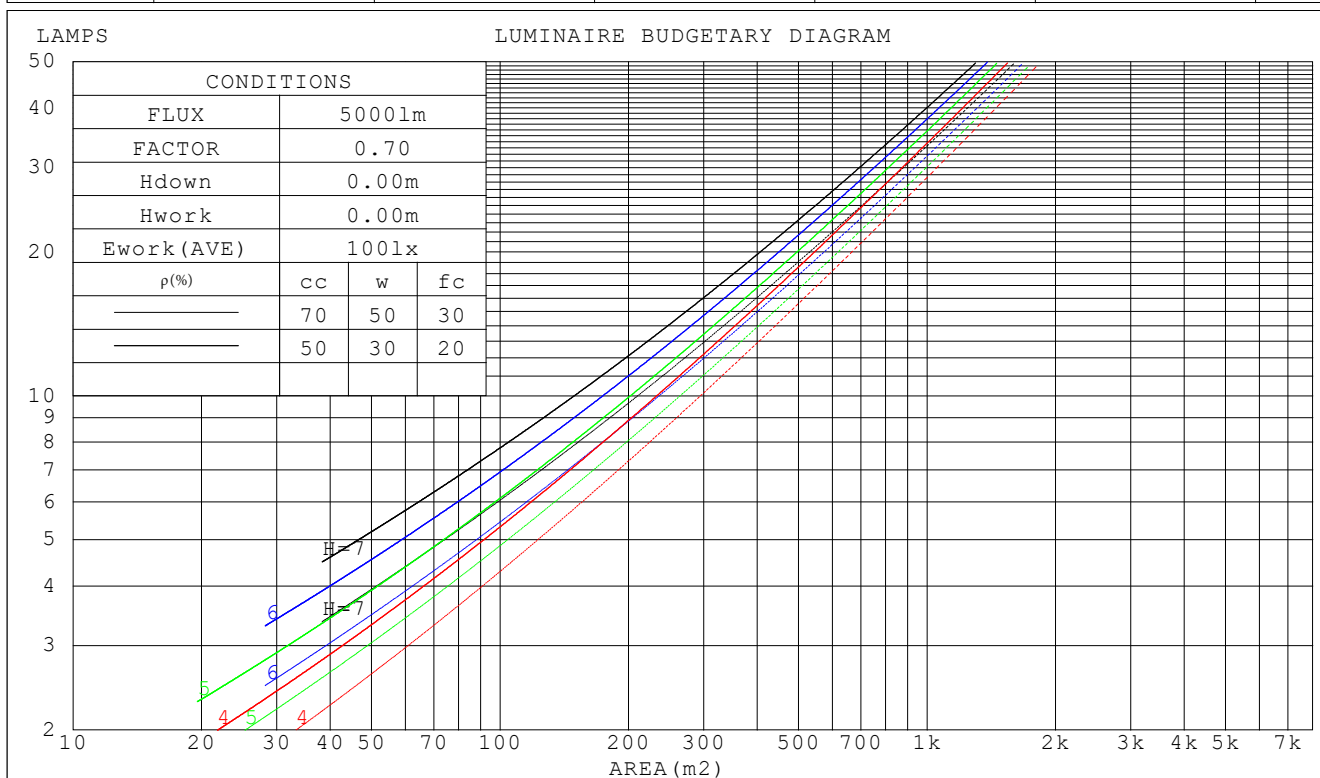

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Hugué
Test Date: Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients (WEC)															
0.0																
1.0	.344	.196	.062	.336	.192	.061	.320	.184	.059	.306	.177	.057	.293	.170	.055	
2.0	.311	.171	.052	.304	.167	.052	.290	.161	.050	.278	.156	.049	.266	.150	.047	
3.0	.283	.151	.045	.276	.148	.045	.264	.143	.043	.253	.139	.042	.242	.134	.042	
4.0	.258	.134	.039	.252	.132	.039	.241	.128	.038	.231	.124	.037	.222	.121	.037	
5.0	.237	.121	.035	.232	.119	.035	.222	.116	.034	.213	.112	.033	.205	.109	.033	
6.0	.219	.110	.031	.214	.108	.031	.205	.105	.031	.197	.102	.030	.189	.100	.030	
7.0	.203	.100	.028	.199	.099	.028	.191	.096	.028	.183	.094	.027	.176	.092	.027	
8.0	.189	.092	.026	.185	.091	.026	.178	.089	.025	.171	.087	.025	.165	.085	.025	
9.0	.176	.085	.024	.173	.084	.024	.167	.082	.023	.161	.081	.023	.155	.079	.023	
10.0	.166	.079	.022	.163	.079	.022	.157	.077	.022	.151	.075	.021	.146	.073	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)															
0.0	.217	.217	.217	.185	.185	.185	.127	.127	.127	.073	.073	.073	.023	.023	.023	
1.0	.209	.183	.158	.179	.157	.136	.123	.108	.094	.071	.062	.055	.023	.020	.018	
2.0	.202	.159	.123	.173	.137	.106	.118	.095	.074	.068	.055	.043	.022	.018	.014	
3.0	.194	.141	.100	.166	.122	.086	.114	.085	.061	.066	.050	.036	.021	.016	.012	
4.0	.186	.128	.084	.160	.111	.073	.110	.077	.051	.064	.045	.030	.020	.015	.010	
5.0	.179	.118	.073	.153	.102	.064	.106	.071	.045	.061	.042	.027	.020	.014	.009	
6.0	.171	.110	.066	.147	.095	.057	.102	.067	.041	.059	.039	.024	.019	.013	.008	
7.0	.164	.103	.060	.141	.089	.052	.098	.063	.037	.057	.037	.022	.018	.012	.007	
8.0	.158	.097	.056	.136	.084	.049	.094	.059	.034	.055	.035	.021	.018	.011	.007	
9.0	.151	.092	.052	.130	.080	.046	.090	.056	.032	.053	.033	.019	.017	.011	.006	
10.0	.146	.088	.050	.126	.076	.043	.087	.054	.031	.051	.032	.018	.016	.010	.006	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: Marçal Huguet
 Test Date: Febrero 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity: 37%
 Test Distance: 8.200m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: Canovelles PRO 2800k					TYPE:		WEIGHT:				
SPEC.:					DIM.: 500x10x4		SERIAL No.:				
MFR.: Luz Negra s.l.					SUR.:22		Shielding Angle:				
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	14.2	15.7	14.5	16.0	16.3	13.5	15.0	13.8	15.3	15.6
	3H	16.1	17.5	16.5	17.8	18.1	14.9	16.3	15.2	16.6	16.9
	4H	17.0	18.4	17.4	18.7	19.0	15.4	16.8	15.8	17.1	17.4
	6H	18.0	19.2	18.4	19.6	19.9	15.8	17.1	16.2	17.5	17.8
	8H	18.5	19.7	18.9	20.0	20.4	16.0	17.2	16.4	17.6	17.9
	12H	19.0	20.2	19.4	20.6	21.0	16.1	17.3	16.5	17.6	18.0
4H	2H	14.8	16.1	15.1	16.4	16.7	14.2	15.5	14.6	15.9	16.2
	3H	16.9	18.0	17.3	18.4	18.8	15.8	17.0	16.2	17.3	17.7
	4H	18.0	19.0	18.4	19.4	19.8	16.5	17.6	16.9	17.9	18.4
	6H	19.1	20.1	19.6	20.5	20.9	17.0	18.0	17.5	18.4	18.9
	8H	19.7	20.6	20.2	21.0	21.5	17.2	18.1	17.7	18.6	19.0
	12H	20.4	21.2	20.9	21.7	22.2	17.4	18.2	17.9	18.7	19.2
8H	4H	18.2	19.1	18.7	19.6	20.0	17.0	17.9	17.4	18.3	18.7
	6H	19.6	20.4	20.1	20.8	21.3	17.7	18.5	18.2	18.9	19.4
	8H	20.4	21.1	20.9	21.6	22.1	18.0	18.7	18.6	19.2	19.7
	12H	21.3	21.9	21.9	22.4	23.0	18.3	18.9	18.9	19.4	20.0
12H	4H	18.2	19.1	18.7	19.5	20.0	17.1	17.9	17.5	18.3	18.8
	6H	19.7	20.4	20.2	20.9	21.4	17.9	18.6	18.4	19.1	19.6
	8H	20.6	21.1	21.1	21.7	22.2	18.3	18.9	18.9	19.4	20.0
Variations with the observer position at spacings:											
S = 1.0H		+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H		+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H		+ 0.2 / - 0.3					+ 0.1 / - 0.3				

CIE Pub.117, 697.6 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = -1.3$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:Febrero 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	55	43	35	54	42	35	53	42	35	29
0.80	64	52	45	63	52	44	61	51	44	37
1.00	73	61	53	71	60	53	69	62	52	45
1.25	80	68	61	78	67	60	75	66	59	51
1.50	85	74	66	83	73	66	79	71	65	56
2.00	92	82	75	90	81	74	86	78	72	64
2.50	96	87	80	93	85	79	89	82	77	68
3.00	99	91	85	97	90	84	92	86	81	72
4.00	103	97	91	101	95	90	96	91	87	77
5.00	106	100	96	103	98	94	98	94	90	80
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: Febrero 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

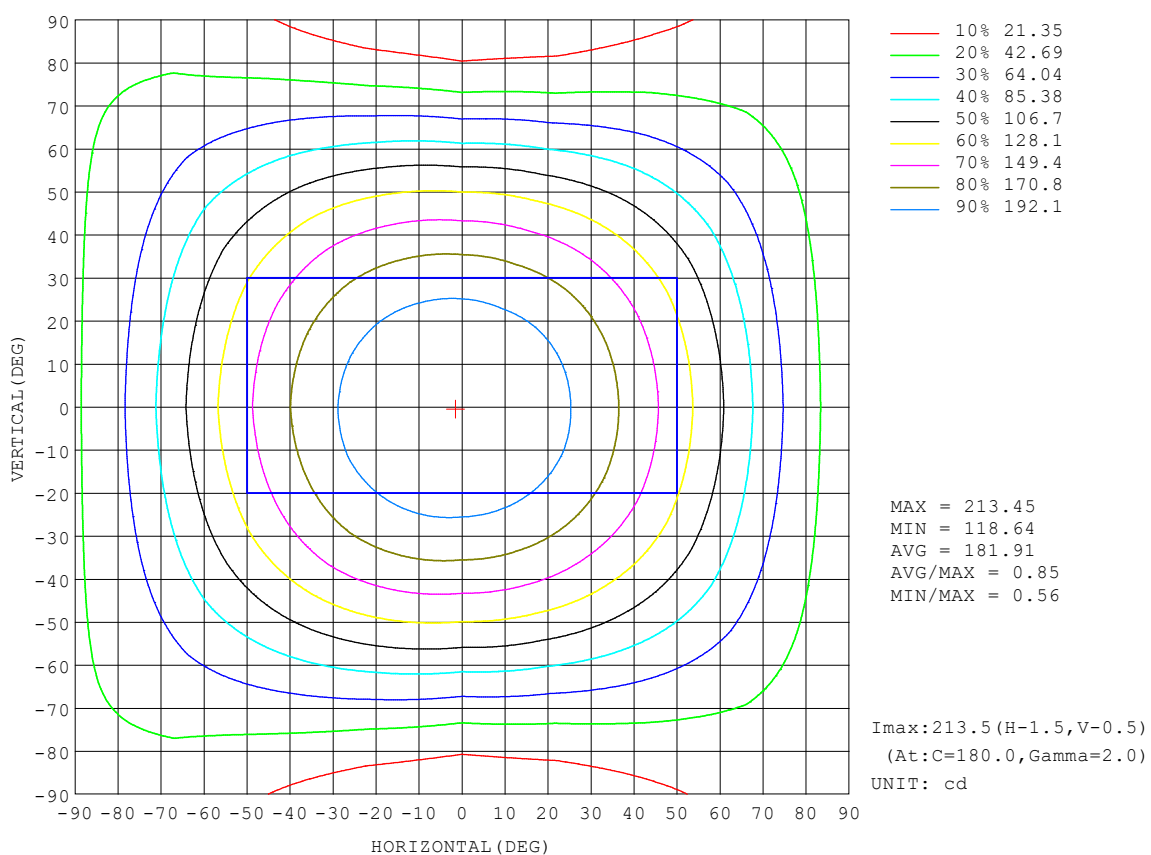


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

AAI Figure

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

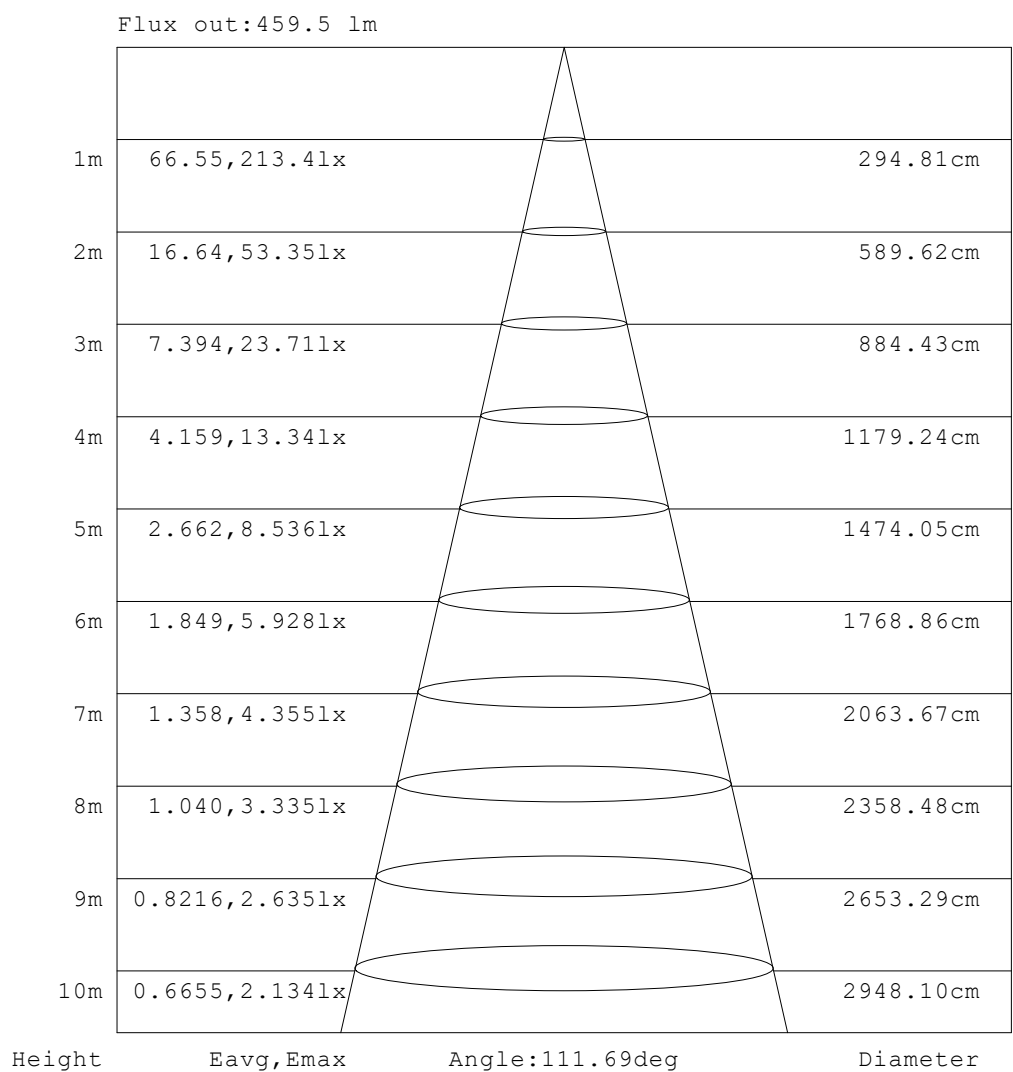


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

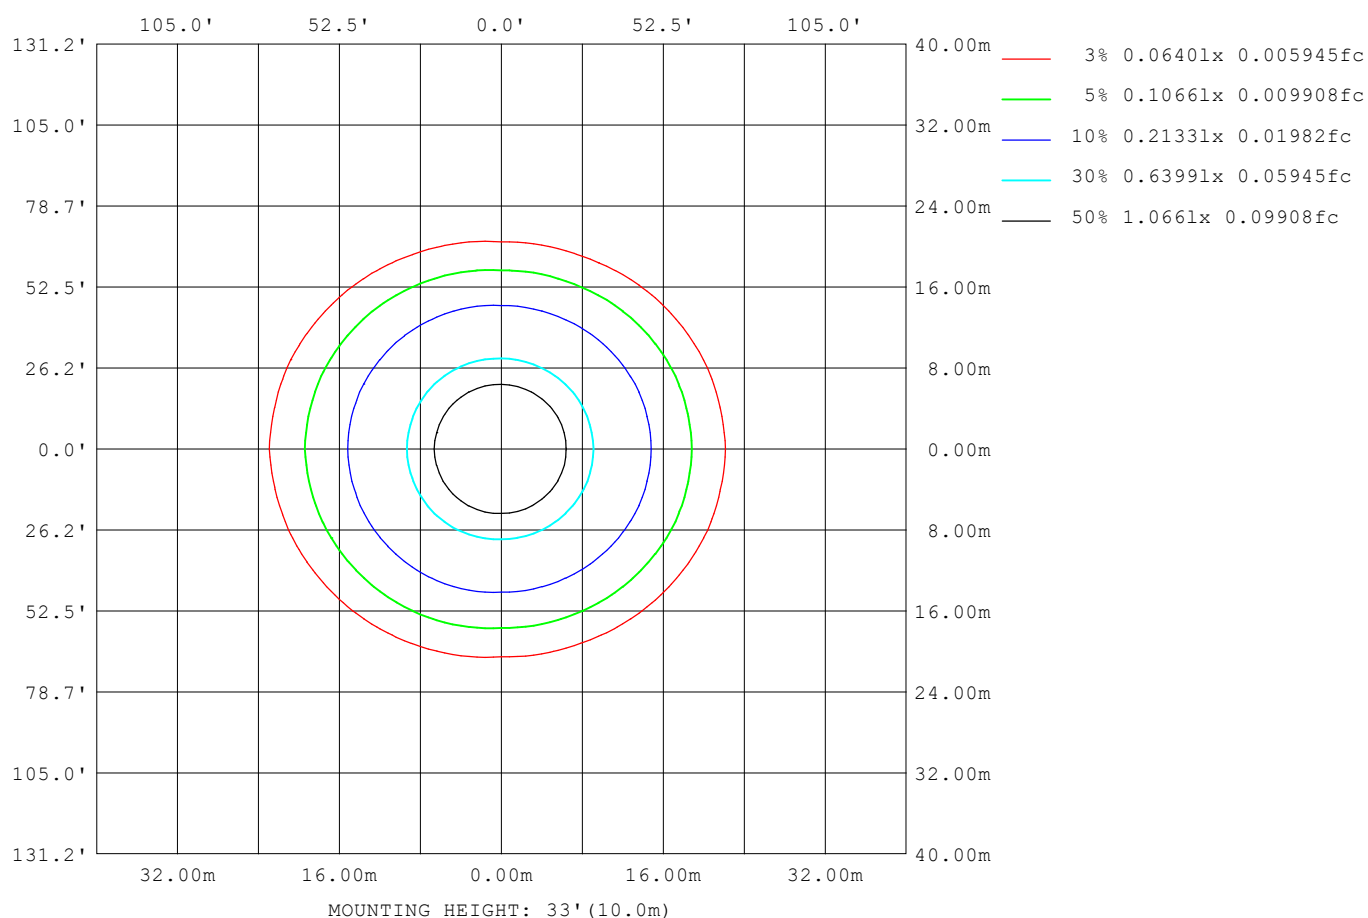

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1171
L_0~180 (75) av	1322
L_0~180 (85) av	2527
L_90~270 (65) av	849
L_90~270 (75) av	718
L_90~270 (85) av	620
L_45 (65) av	1019
L_45 (75) av	1041
L_45 (85) av	1650

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

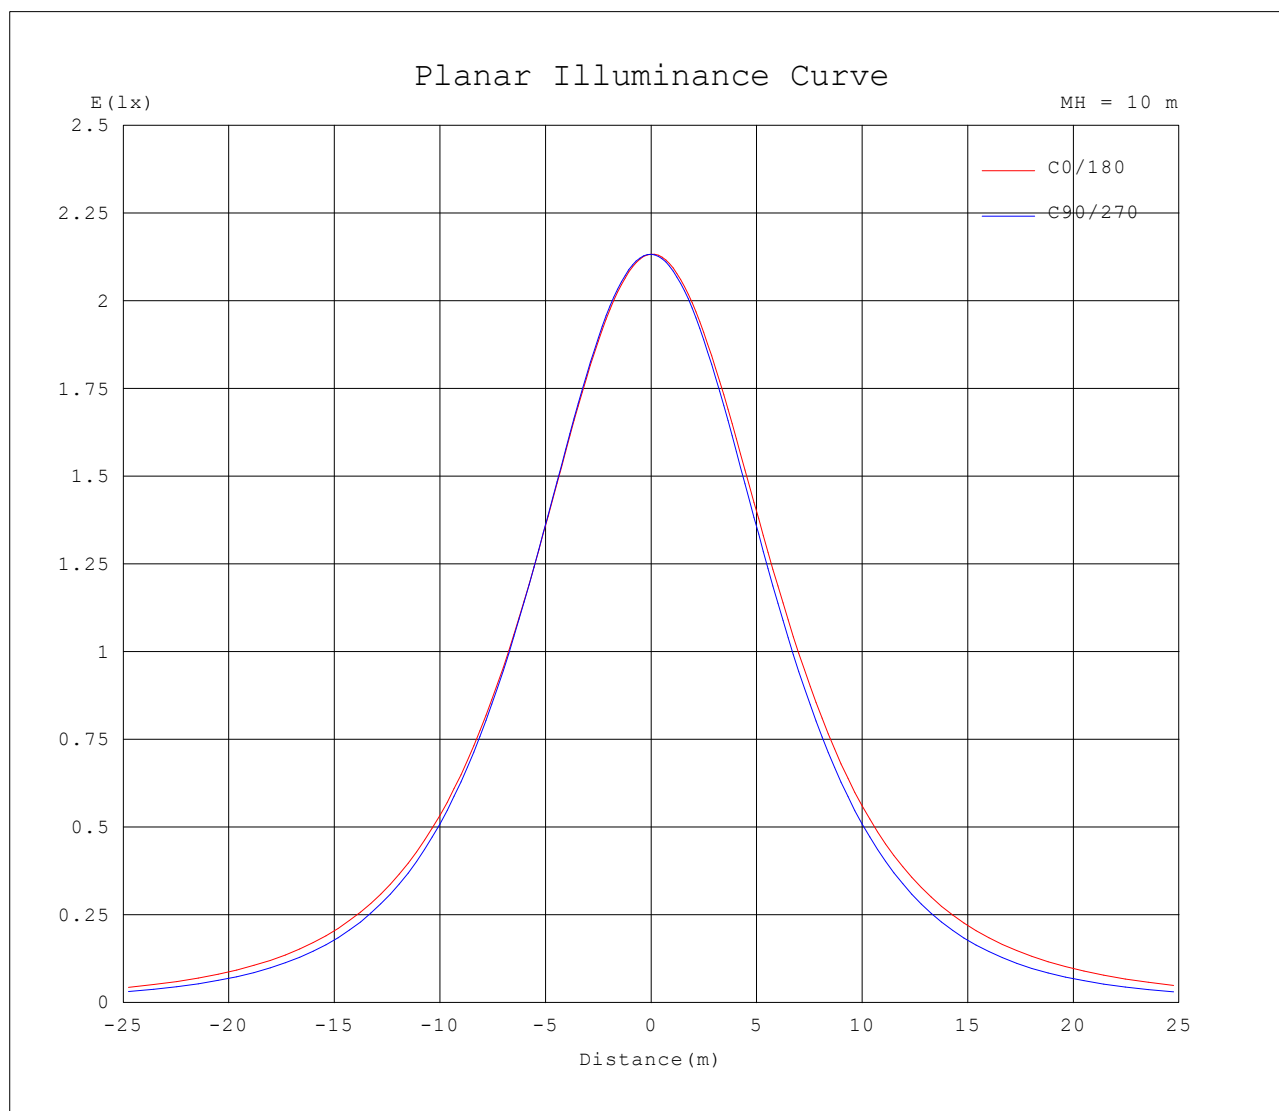

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Canovelles PRO 2800k	TYPE:	WEIGHT:
SPEC.:	DIM.: 500x10x4	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	213	213	213	213	213	213	213	213	213	213	213	213	213	213	213	213			
5	212	212	212	212	213	213	213	213	213	213	213	213	212	212	212	212			
10	210	210	210	210	211	211	211	211	211	211	211	210	210	210	209	209			
15	206	206	206	206	207	207	208	208	208	208	208	207	206	205	205	205			
20	200	200	200	200	201	202	203	204	204	203	202	201	200	199	200	200			
25	193	193	193	193	193	195	196	198	198	197	196	194	192	191	192	192			
30	184	184	184	183	184	186	188	190	190	189	187	185	183	182	183	183			
35	174	174	173	172	172	175	178	179	181	180	178	174	172	171	173	173			
40	163	163	161	159	159	163	167	168	171	169	167	162	159	159	161	162			
45	151	150	147	145	144	149	154	157	159	157	154	149	144	144	147	150			
50	138	137	132	129	128	133	139	143	146	144	140	133	128	129	133	137			
55	124	122	116	112	110	116	123	129	133	130	124	116	110	111	117	122			
60	109	107	99.6	93.6	91.2	98.5	106	114	119	116	108	98.0	90.3	92.4	99.9	107			
65	93.8	90.5	82.7	75.4	72.5	80.2	89.2	98.0	104	100	90.2	79.1	71.1	73.6	82.5	90.1			
70	78.0	74.5	66.3	57.9	54.4	62.3	72.5	82.6	89.0	84.3	73.0	61.2	53.1	56.0	65.7	73.7			
75	63.1	59.6	51.1	41.9	37.7	45.8	56.8	67.8	73.8	68.6	57.1	45.1	36.7	40.2	50.5	58.7			
80	50.2	46.7	37.7	28.0	23.3	31.2	42.7	54.1	59.8	54.5	43.2	30.9	22.3	26.6	37.3	45.9			
85	39.5	35.8	26.7	16.7	11.3	19.0	30.6	42.6	48.6	43.1	31.4	18.8	10.3	15.5	26.3	35.4			
90	31.7	27.6	18.3	8.50	0.86	9.50	21.3	33.9	40.7	34.8	22.1	9.58	0.95	7.36	17.7	27.2			
95	26.4	22.2	13.0	4.88	0.34	4.25	15.1	27.6	34.4	28.8	15.7	4.82	0.40	3.90	12.0	21.7			
100	20.8	17.8	9.84	3.05	0.44	1.31	10.6	21.3	26.1	22.2	11.5	2.14	0.51	1.85	8.71	17.3			
105	14.3	12.8	7.32	1.67	0.55	0.79	5.74	13.8	16.7	14.2	7.12	1.29	0.63	1.10	6.27	12.4			
110	9.21	8.32	4.72	1.07	0.68	0.68	2.09	6.41	8.79	6.99	2.78	0.80	0.76	0.79	3.05	7.99			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:Febrero 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks: