


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 78.51 lm/W
MODEL	33.033	I _{max} (cd)	424.8	S/MH (C0/180)	1.27	
NOMINAL POWER (W)	20W/m	LOR (%)	100.0	S/MH (C90/270)	1.27	
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	1247.5	η UP, DN (C0-180)	0.1, 50.0	
NOMINAL FLUX (lm)	1247.47	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 49.7	
LAMPS INSIDE	1	η up (%)	0.3	CIBSE SHR NOM	1.25	
TEST VOLTAGE (V)	24	η down (%)	99.7	CIBSE SHR MAX	1.35	

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

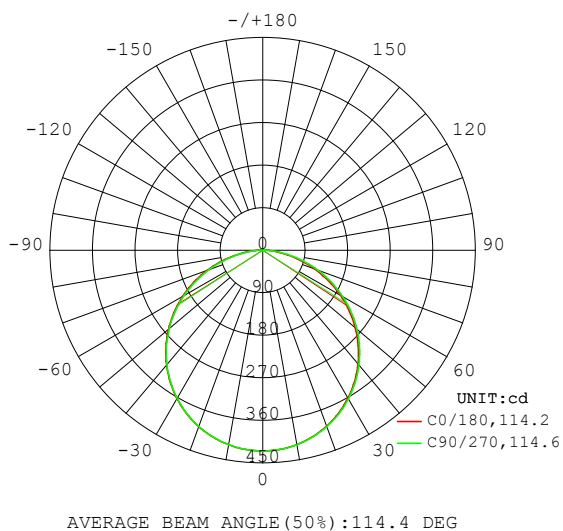

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

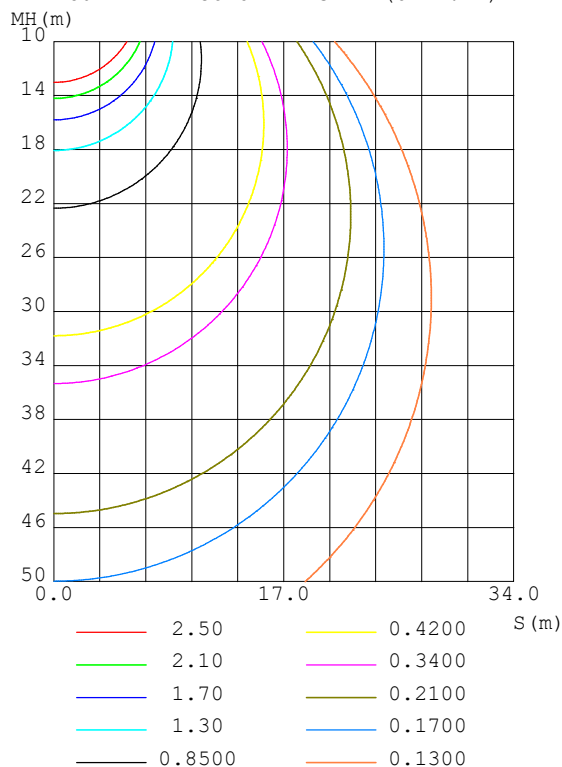

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: April 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	417.4	417.7	417.8	417.7	417.7	417.8	417.6	417.5	0- 10	40.20	40.20	3.22,3.22
20	395.9	396.7	397.0	396.9	396.9	396.8	396.5	396.1	10- 20	115.4	155.6	12.5,12.5
30	361.1	362.2	362.8	362.7	362.8	362.5	361.9	361.4	20- 30	175.6	331.2	26.5,26.5
40	313.7	315.7	316.8	316.8	316.7	316.3	315.3	314.3	30- 40	212.9	544.1	43.6,43.6
50	255.8	258.5	260.4	260.5	260.6	259.8	258.3	256.6	40- 50	222.4	766.6	61.4,61.4
60	189.3	192.6	195.3	195.8	196.1	194.8	192.5	190.1	50- 60	202.7	969.3	77.7,77.7
70	117.5	121.6	124.9	125.9	125.9	124.2	121.0	118.0	60- 70	156.4	1126	90.2,90.2
80	48.04	51.77	54.15	55.07	55.49	53.83	49.99	47.57	70- 80	91.31	1217	97.6,97.6
90	3.676	5.449	0.9518	6.093	7.071	6.784	0.9664	3.361	80- 90	26.92	1244	99.7,99.7
100	1.088	1.220	0.9037	1.049	1.254	1.333	1.040	1.145	90-100	2.067	1246	99.9,99.9
110	1.355	1.582	1.371	1.288	1.486	1.805	1.520	1.485	100-110	1.373	1247	100,100
120	0	0	0	0	0	0	0	0	110-120	0.0774	1247	100,100
130	0	0	0	0	0	0	0	0	120-130	0	1247	100,100
140	0	0	0	0	0	0	0	0	130-140	0	1247	100,100
150	0	0	0	0	0	0	0	0	140-150	0	1247	100,100
160	0	0	0	0	0	0	0	0	150-160	0	1247	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1247	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1247	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Marçal Huguet
 Test Date:April 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:37%
 Test Distance:8.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

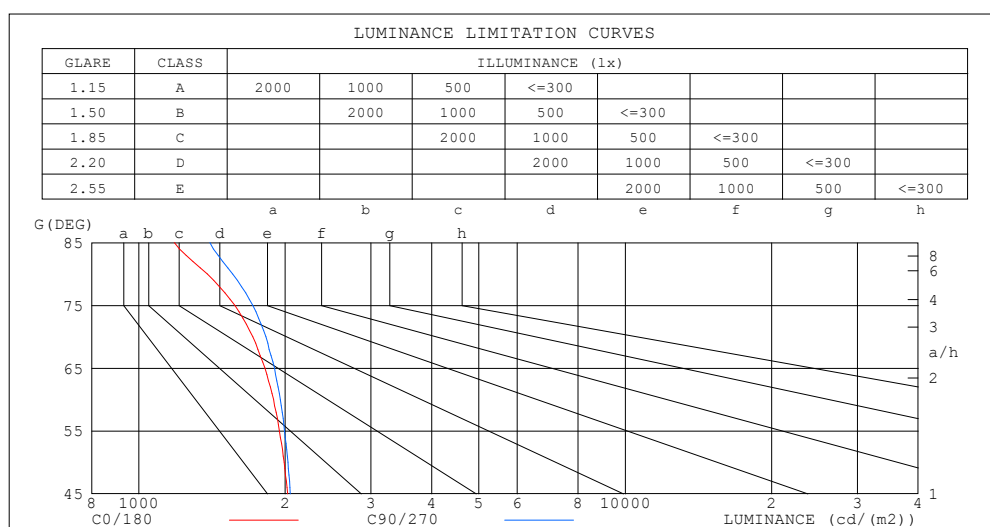

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1184	1400
80	1383	1559
75	1576	1716
70	1717	1826
65	1817	1901
60	1892	1953
55	1947	1994
50	1989	2026
45	2022	2049


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: April 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pf _c	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.95	1.01	.97	.94	.97	.94	.91	.93	.90	.88	.89	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.76	.84	.79	.74	.81	.77	.73	.78	.74	.71	.69
3.0	.79	.71	.64	.77	.70	.63	.74	.68	.62	.71	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.68	.60	.54	.66	.59	.53	.63	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.52	.46	.59	.51	.46	.57	.50	.45	.55	.49	.44	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.45	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.35	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.45	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.28	.42	.34	.28	.41	.33	.28	.39	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

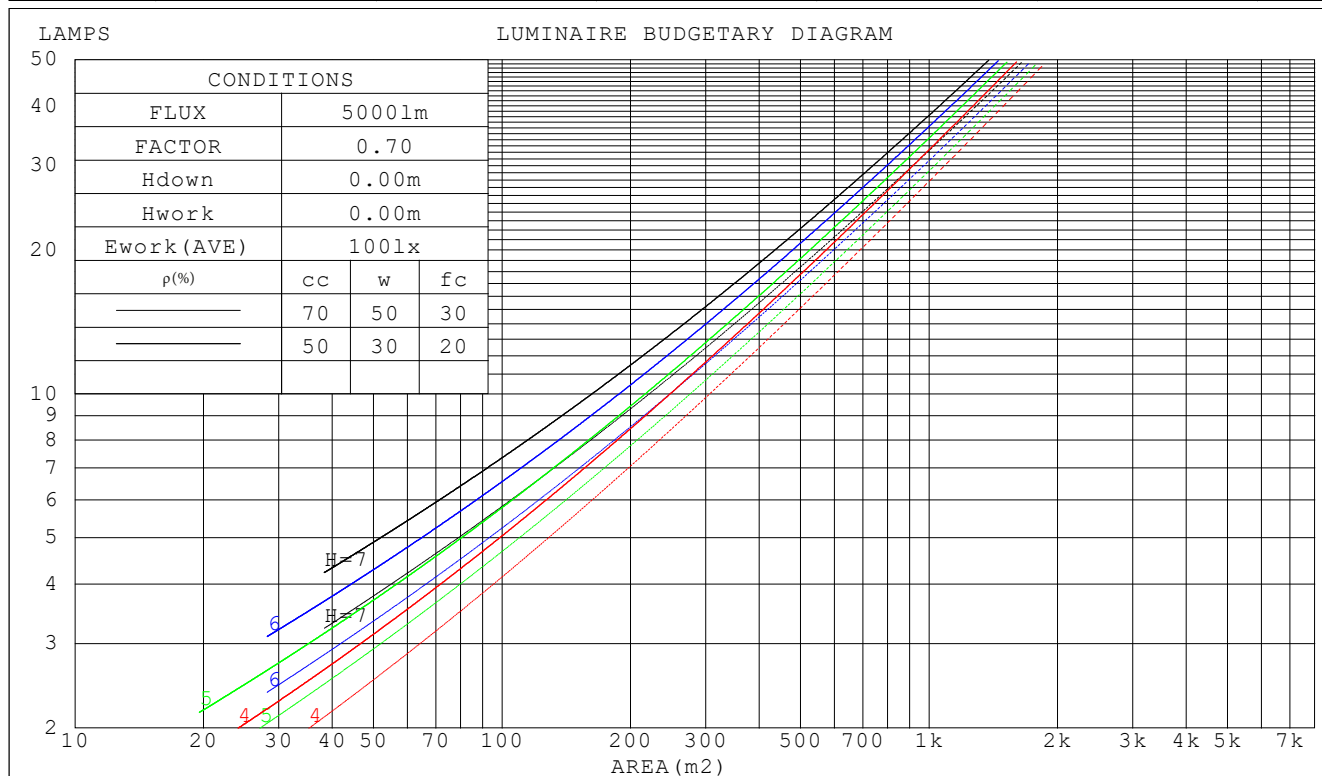

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: April 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients (WEC)															
0.0																
1.0	.315	.179	.057	.308	.176	.056	.295	.169	.054	.282	.163	.052	.271	.157	.051	
2.0	.296	.162	.050	.289	.159	.049	.277	.154	.048	.266	.149	.047	.256	.145	.046	
3.0	.273	.145	.043	.267	.143	.043	.257	.139	.042	.247	.135	.042	.238	.132	.041	
4.0	.251	.131	.038	.246	.129	.038	.237	.126	.038	.228	.123	.037	.220	.120	.036	
5.0	.232	.118	.034	.228	.117	.034	.219	.114	.034	.212	.112	.033	.205	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.197	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)															
0.0	.193	.193	.193	.165	.165	.165	.112	.112	.112	.065	.065	.065	.021	.021	.021	
1.0	.183	.158	.136	.156	.136	.117	.107	.093	.081	.062	.054	.047	.020	.017	.015	
2.0	.175	.134	.100	.150	.115	.086	.103	.080	.060	.059	.046	.035	.019	.015	.011	
3.0	.167	.117	.076	.143	.101	.066	.098	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.160	.103	.060	.137	.089	.052	.094	.062	.037	.054	.036	.022	.018	.012	.007	
5.0	.152	.093	.049	.131	.080	.043	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.145	.085	.041	.125	.073	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.138	.078	.035	.119	.067	.031	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.132	.072	.031	.113	.062	.027	.078	.044	.019	.046	.026	.011	.015	.008	.004	
9.0	.125	.067	.027	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.120	.063	.025	.103	.054	.021	.072	.038	.015	.042	.023	.009	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: Marçal Huguet
 Test Date: April 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity: 37%
 Test Distance: 8.200m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.4	16.0	14.7	16.2	16.4	14.5	16.1	14.8	16.3	16.5
3H	15.9	17.4	16.2	17.6	17.8	16.1	17.5	16.4	17.8	18.0
4H	16.5	17.9	16.8	18.1	18.4	16.8	18.1	17.1	18.4	18.6
6H	16.9	18.2	17.3	18.5	18.8	17.2	18.5	17.6	18.8	19.1
8H	17.1	18.3	17.4	18.6	18.9	17.4	18.6	17.7	18.9	19.2
12H	17.1	18.3	17.5	18.6	18.9	17.5	18.7	17.8	19.0	19.3
4H 2H	15.1	16.4	15.4	16.7	16.9	15.1	16.5	15.5	16.8	17.0
3H	16.8	17.9	17.1	18.2	18.6	16.9	18.1	17.3	18.4	18.7
4H	17.5	18.6	17.9	18.9	19.2	17.7	18.8	18.1	19.1	19.4
6H	18.0	19.0	18.4	19.3	19.7	18.3	19.3	18.7	19.6	20.0
8H	18.2	19.1	18.6	19.5	19.8	18.5	19.4	18.9	19.8	20.2
12H	18.3	19.1	18.7	19.5	19.9	18.6	19.5	19.1	19.9	20.3
8H 4H	17.8	18.7	18.2	19.0	19.4	18.0	18.9	18.4	19.2	19.6
6H	18.4	19.2	18.9	19.6	20.0	18.7	19.5	19.2	19.9	20.3
8H	18.7	19.4	19.2	19.8	20.3	19.0	19.7	19.5	20.1	20.6
12H	18.9	19.5	19.4	19.9	20.4	19.2	19.8	19.7	20.3	20.7
12H 4H	17.8	18.6	18.2	19.0	19.4	18.0	18.8	18.4	19.2	19.6
6H	18.5	19.2	19.0	19.6	20.1	18.8	19.4	19.2	19.9	20.3
8H	18.8	19.4	19.3	19.8	20.3	19.1	19.7	19.6	20.1	20.6

Variations with the observer position at spacings:

S = 1.0H	+ 0.2 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.1 / - 0.3

CIE Pub.117, 1247 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.8$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:April 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	56	72	65	56	49
1.25	82	72	65	81	71	64	78	70	63	56
1.50	88	77	70	86	77	70	83	75	69	61
2.00	94	86	79	93	85	78	89	82	77	69
2.50	98	90	84	96	89	83	92	86	82	73
3.00	102	95	89	100	93	88	96	90	86	77
4.00	106	100	95	103	98	94	99	95	91	82
5.00	108	103	99	106	101	98	101	98	95	85
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: Marçal Huguet
 Test Date: April 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity: 37%
 Test Distance: 8.200m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

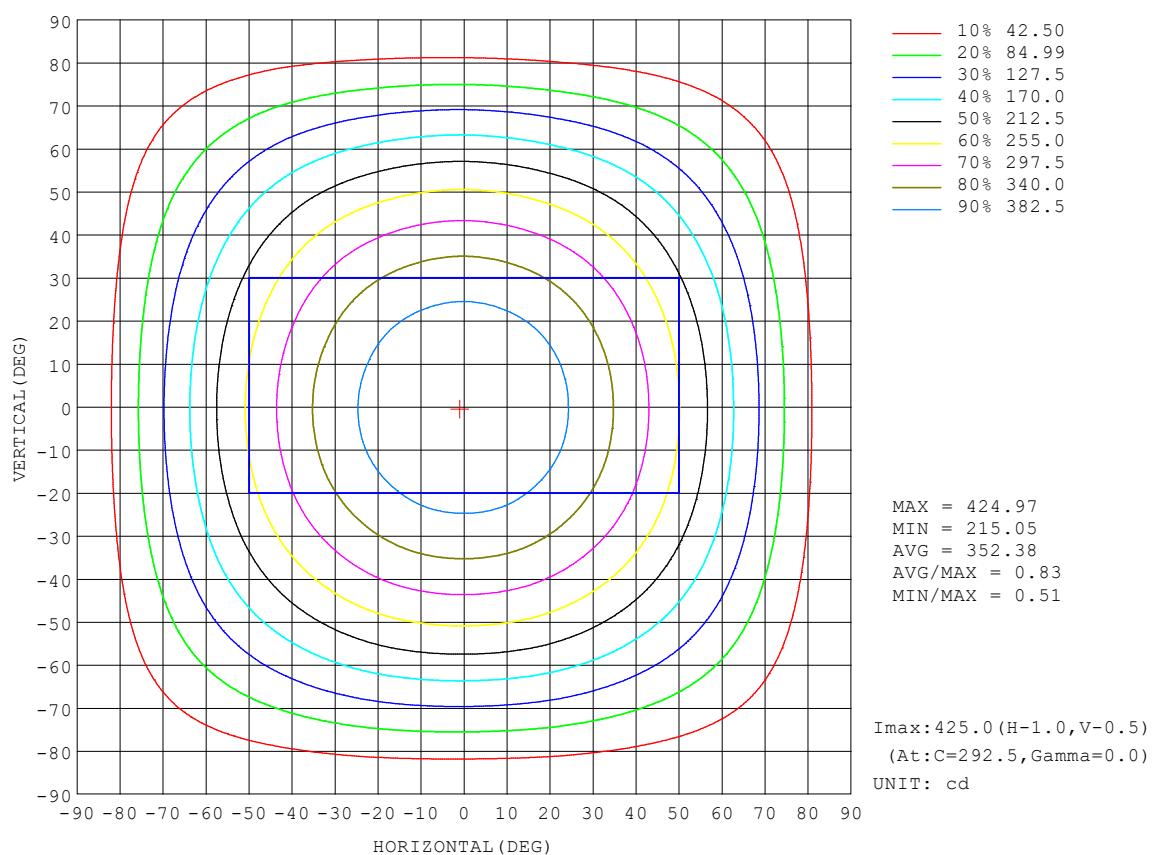


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: April 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

AAI Figure

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

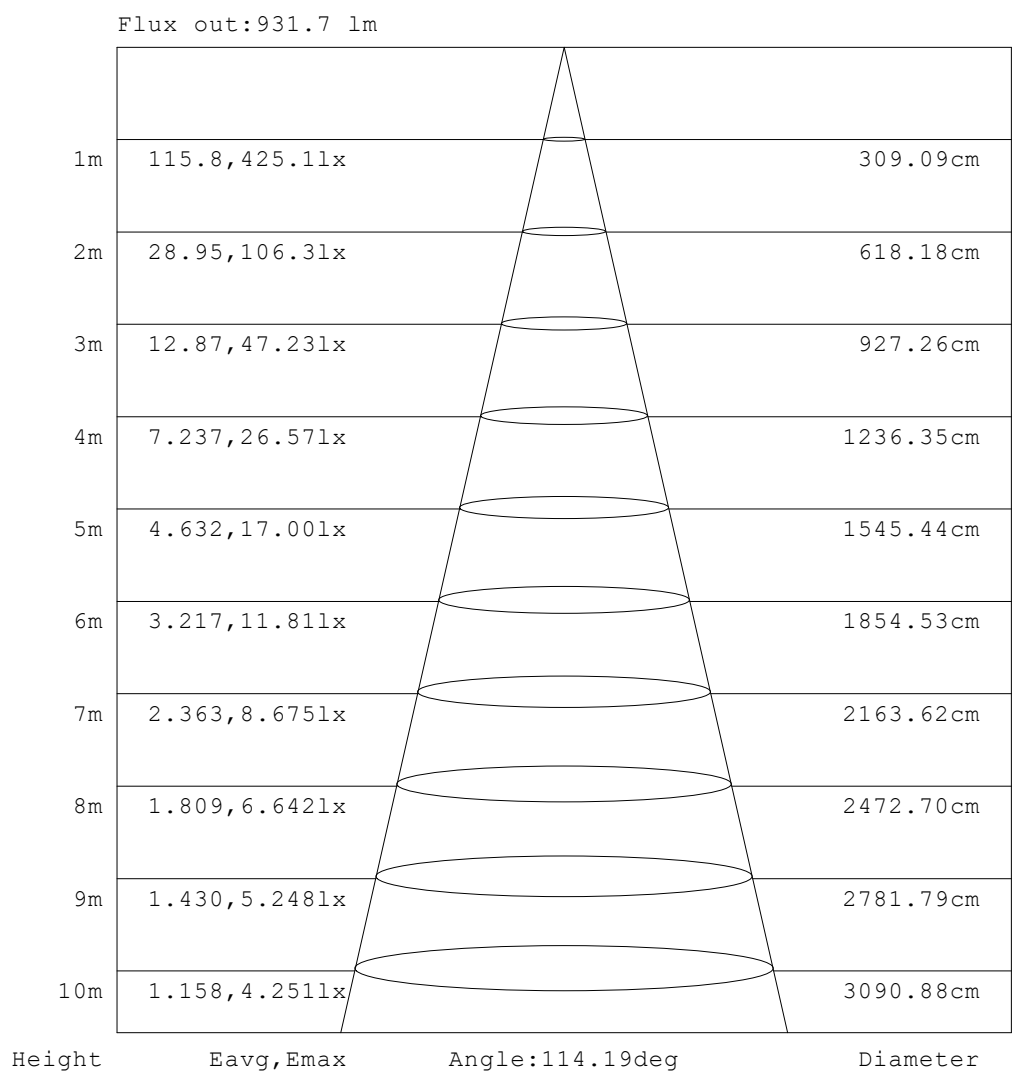


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: April 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

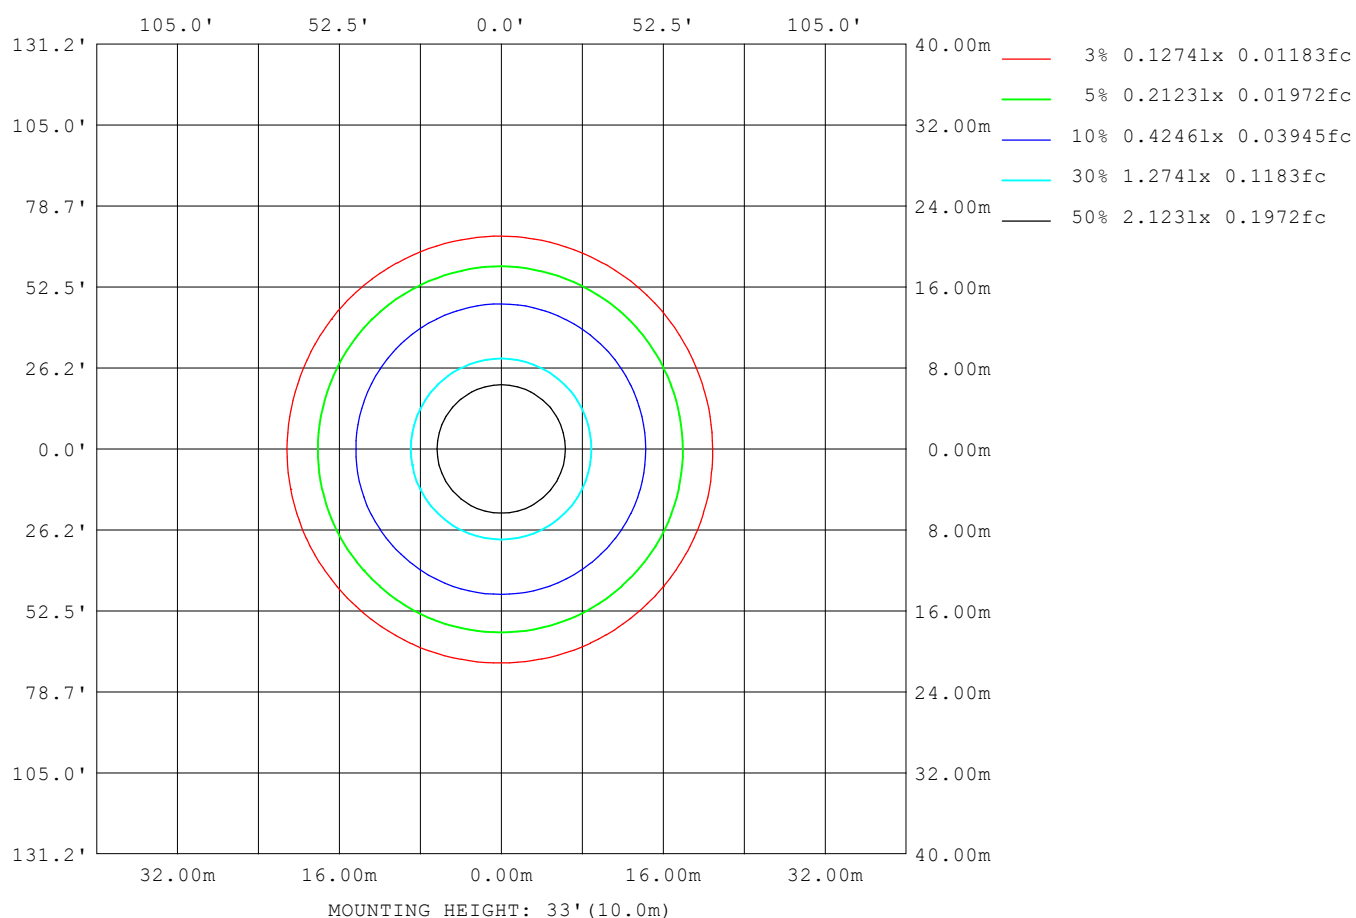

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguët
Test Date: April 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1864
L_0~180 (75) av	1659
L_0~180 (85) av	1323
L_90~270 (65) av	1880
L_90~270 (75) av	1676
L_90~270 (85) av	1286
L_45 (65) av	1873
L_45 (75) av	1669
L_45 (85) av	1325

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:April 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

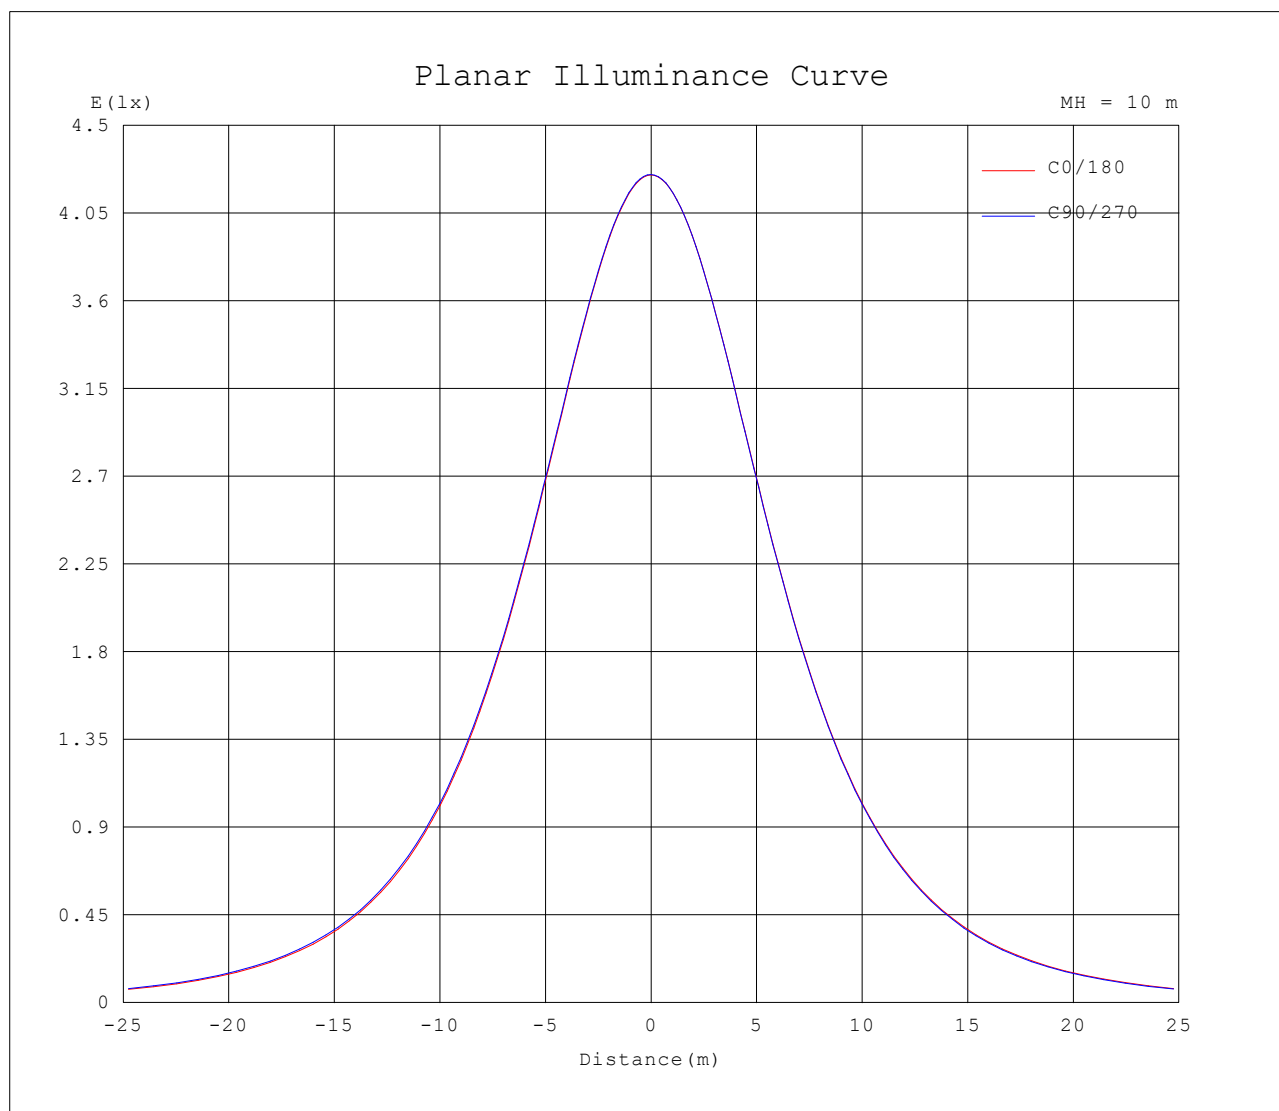

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: April 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Trevelez 2100K	TYPE:	WEIGHT:
SPEC.:	DIM.: 10x2x500mm	SERIAL No.:
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	425	425	425	425	425	425	425	425	425	425	425	425	425	425	425	425			
5	423	423	423	423	423	423	423	423	423	423	423	423	423	423	423	423			
10	417	418	418	418	418	418	418	418	418	417	418	417	418	417	417	417			
15	408	409	409	409	409	409	409	409	409	409	409	409	409	409	409	408			
20	396	397	397	397	397	397	397	397	397	396	397	396	396	396	396	396			
25	380	381	381	382	382	382	381	382	381	381	381	381	381	380	380	380			
30	361	362	362	363	363	363	363	363	363	362	362	362	362	361	361	361			
35	339	340	340	341	341	342	341	341	341	340	341	340	340	339	339	339			
40	314	315	316	317	317	318	317	317	317	316	316	315	315	314	314	313			
45	286	288	288	290	290	291	290	290	290	289	289	288	288	287	287	286			
50	256	258	259	260	260	261	261	261	261	259	260	258	258	256	257	255			
55	223	226	226	229	229	230	229	230	229	228	228	226	226	224	224	223			
60	189	192	193	195	195	197	196	197	196	194	195	193	192	190	190	189			
65	154	156	158	160	161	162	161	162	161	160	160	158	157	155	154	153			
70	117	120	122	124	125	126	126	127	126	124	124	122	121	118	118	116			
75	81.6	84.1	85.7	88.2	88.8	90.3	89.9	90.7	90.1	88.6	88.3	85.8	84.7	82.1	81.6	80.4			
80	48.0	50.5	51.8	53.8	54.1	55.5	55.1	56.0	55.5	54.1	53.8	51.5	50.0	47.9	47.6	46.7			
85	20.6	22.7	23.4	24.5	24.4	25.2	24.9	25.7	25.5	24.7	24.5	22.4	20.4	19.5	19.6	19.2			
90	3.68	4.82	5.45	5.06	0.95	5.53	6.09	6.53	7.07	7.08	6.78	4.79	0.97	2.86	3.36	3.32			
95	1.13	1.38	1.81	1.58	0.69	1.50	1.73	1.63	1.90	2.02	2.01	1.28	0.81	0.97	1.33	1.28			
100	1.09	1.18	1.22	1.38	0.90	0.87	1.05	1.12	1.25	1.37	1.33	1.21	1.04	1.05	1.14	1.29			
105	1.21	1.21	1.42	1.42	1.14	1.09	1.10	1.14	1.33	1.50	1.49	1.27	1.28	1.27	1.28	1.37			
110	1.35	1.39	1.58	1.99	1.37	1.33	1.29	1.29	1.49	1.73	1.81	1.50	1.52	1.49	1.48	1.51			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:April 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks: