


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 102.00 lm/W			
MODEL	33.004	I _{max} (cd)	353.6	S/MH (C0/180)	1.27
NOMINAL POWER (W)	20w metro	LOR (%)	100.0	S/MH (C90/270)	1.28
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	1032.3	η UP, DN (C0-180)	0.1,49.7
NOMINAL FLUX (lm)	1032.25	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1,50.1
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

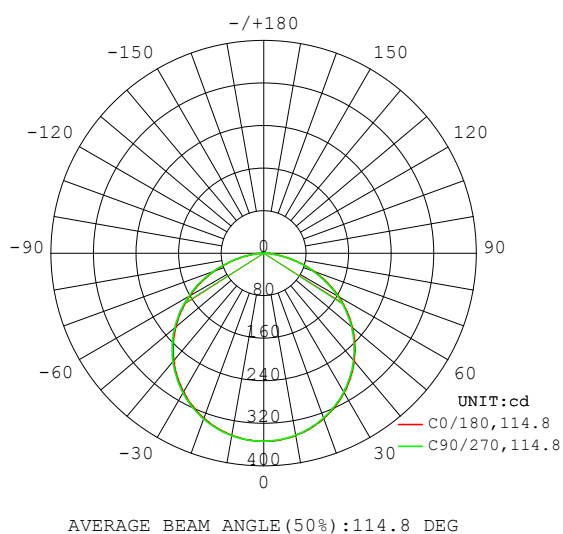

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

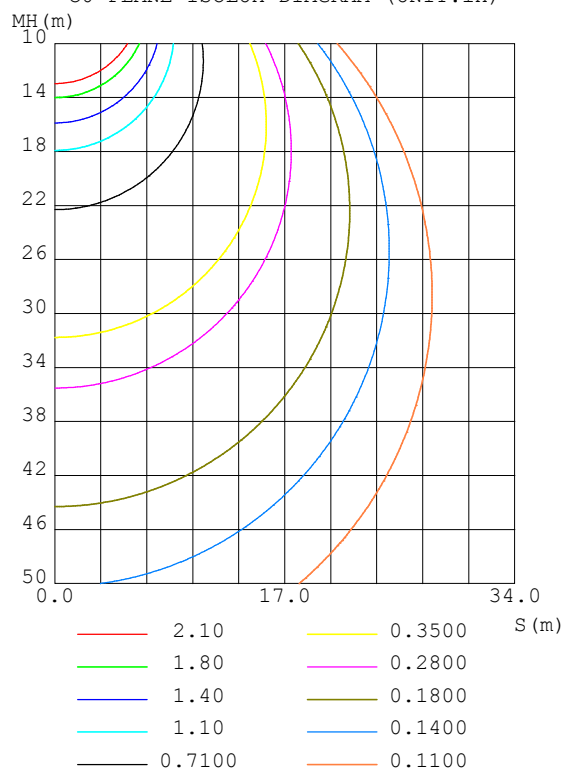

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Sergio Carneros
Test Date: May 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	347.9	347.6	347.2	347.2	347.6	348.1	348.3	348.3	0- 10	33.48	33.48	3.24, 3.24
20	330.7	330.0	329.4	329.4	330.1	331.0	331.6	331.6	10- 20	96.13	129.6	12.6, 12.6
30	302.7	301.7	300.9	300.8	301.8	303.1	303.9	303.9	20- 30	146.4	276.0	26.7, 26.7
40	264.6	263.6	262.6	262.4	263.5	265.2	266.2	266.3	30- 40	178.0	454.0	44, 44
50	217.6	216.3	215.2	215.0	216.3	217.9	219.1	219.2	40- 50	186.4	640.4	62, 62
60	162.8	161.3	160.0	159.8	161.1	162.7	163.9	164.2	50- 60	170.1	810.5	78.5, 78.5
70	101.6	100.1	98.67	98.57	99.80	101.2	102.3	102.8	60- 70	130.3	940.8	91.1, 91.1
80	39.37	38.13	36.61	36.50	37.80	38.85	39.68	40.25	70- 80	72.84	1014	98.2, 98.2
90	0.7634	0.8140	0.4592	0.7624	0.6989	0.8893	0.4937	1.130	80- 90	16.74	1030	99.8, 99.8
100	0.6993	0.8123	0.7595	0.7370	0.8313	0.9317	0.8345	0.8250	90-100	0.7406	1031	99.9, 99.9
110	1.071	1.377	1.162	1.117	1.242	1.512	1.253	1.222	100-110	1.086	1032	100, 100
120	0	0	0	0	0	0	0	0	110-120	0.0646	1032	100, 100
130	0	0	0	0	0	0	0	0	120-130	0	1032	100, 100
140	0	0	0	0	0	0	0	0	130-140	0	1032	100, 100
150	0	0	0	0	0	0	0	0	140-150	0	1032	100, 100
160	0	0	0	0	0	0	0	0	150-160	0	1032	100, 100
170	0	0	0	0	0	0	0	0	160-170	0	1032	100, 100
180	0	0	0	0	0	0	0	0	170-180	0	1032	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25DEG
 Operators: Sergio Carneros
 Test Date: May 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity: 37%
 Test Distance: 8.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

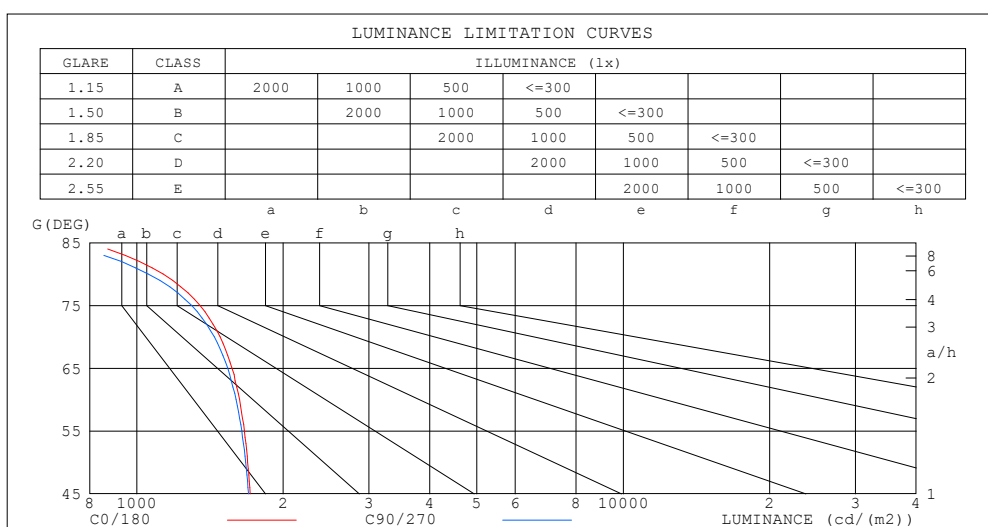

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	788	684
80	1132	1054
75	1349	1296
70	1483	1443
65	1569	1537
60	1626	1601
55	1664	1644
50	1690	1674
45	1710	1697


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Sergio Carneros
Test Date:May 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.93	.91	.88	.90	.88	.86	.84
2.0	.90	.83	.78	.88	.82	.77	.85	.80	.75	.82	.77	.73	.78	.75	.72	.69
3.0	.79	.71	.64	.78	.70	.64	.75	.68	.63	.72	.66	.62	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.58	.52	.62	.56	.52	.50
5.0	.63	.53	.47	.61	.53	.46	.59	.52	.46	.57	.51	.45	.55	.50	.45	.43
6.0	.56	.47	.41	.55	.47	.40	.53	.46	.40	.52	.45	.40	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.42	.36	.49	.41	.35	.47	.40	.35	.46	.40	.35	.33
8.0	.46	.38	.32	.46	.38	.32	.44	.37	.32	.43	.36	.31	.42	.36	.31	.29
9.0	.43	.34	.29	.42	.34	.29	.41	.34	.28	.40	.33	.28	.39	.33	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.31	.26	.37	.30	.26	.36	.30	.26	.24

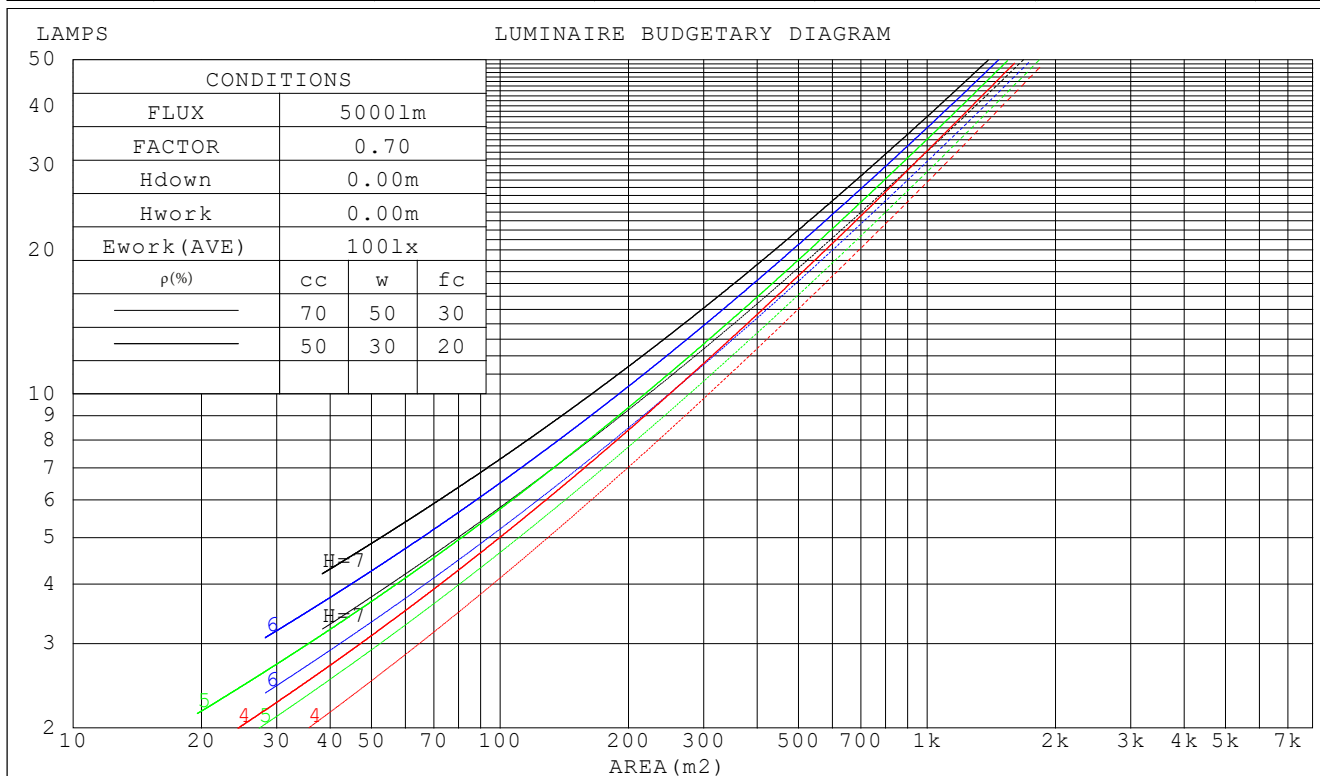

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Sergio Carneros
Test Date:May 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients (WEC)															
0.0																
1.0	.309	.176	.056	.302	.172	.055	.288	.165	.053	.276	.159	.051	.265	.153	.049	
2.0	.292	.160	.049	.286	.157	.048	.274	.152	.047	.263	.148	.046	.253	.143	.045	
3.0	.271	.144	.043	.265	.142	.043	.255	.138	.042	.245	.134	.041	.236	.131	.040	
4.0	.250	.130	.038	.245	.128	.038	.236	.125	.037	.227	.122	.037	.219	.119	.036	
5.0	.231	.118	.034	.227	.116	.034	.219	.114	.033	.211	.111	.033	.204	.109	.033	
6.0	.214	.107	.031	.210	.106	.031	.203	.104	.030	.196	.102	.030	.190	.100	.030	
7.0	.199	.099	.028	.196	.098	.028	.189	.096	.028	.183	.094	.027	.178	.092	.027	
8.0	.186	.091	.026	.183	.090	.025	.177	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.084	.024	.172	.084	.023	.166	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.152	.076	.022	.148	.074	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)															
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.155	.135	.117	.106	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.133	.099	.149	.115	.086	.102	.079	.060	.059	.046	.035	.019	.015	.011	
3.0	.166	.116	.076	.142	.100	.066	.098	.069	.046	.056	.041	.027	.018	.013	.009	
4.0	.158	.102	.060	.136	.089	.052	.094	.062	.036	.054	.036	.022	.017	.012	.007	
5.0	.151	.092	.048	.130	.080	.042	.089	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.144	.084	.040	.124	.072	.035	.085	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.137	.077	.035	.118	.067	.030	.081	.047	.021	.047	.028	.013	.015	.009	.004	
8.0	.131	.071	.030	.112	.062	.026	.078	.043	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.066	.027	.107	.057	.023	.074	.040	.016	.043	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.102	.054	.021	.071	.038	.015	.041	.022	.009	.013	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Sergio Carneros
 Test Date:May 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:37%
 Test Distance:8.200m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	14.6	16.1	14.9	16.3	16.5	14.5	16.1	14.8	16.3	16.5
3H	16.1	17.5	16.4	17.8	18.0	16.0	17.5	16.3	17.7	17.9
4H	16.7	18.1	17.0	18.3	18.6	16.6	18.0	16.9	18.2	18.5
6H	17.1	18.4	17.4	18.6	18.9	17.0	18.2	17.3	18.5	18.8
8H	17.2	18.4	17.5	18.7	19.0	17.0	18.3	17.4	18.6	18.9
12H	17.2	18.4	17.6	18.7	19.0	17.1	18.2	17.4	18.5	18.8
4H 2H	15.2	16.5	15.5	16.8	17.1	15.2	16.5	15.5	16.8	17.0
3H	16.9	18.1	17.3	18.4	18.7	16.8	18.0	17.2	18.3	18.6
4H	17.6	18.7	18.0	19.0	19.4	17.5	18.6	17.9	18.9	19.3
6H	18.1	19.1	18.5	19.4	19.8	18.0	19.0	18.4	19.3	19.7
8H	18.3	19.2	18.7	19.5	19.9	18.1	19.0	18.5	19.4	19.8
12H	18.3	19.2	18.8	19.5	20.0	18.2	19.0	18.6	19.4	19.8
8H 4H	17.9	18.8	18.3	19.1	19.5	17.8	18.7	18.2	19.0	19.4
6H	18.5	19.2	19.0	19.6	20.1	18.4	19.1	18.8	19.5	20.0
8H	18.7	19.4	19.2	19.8	20.3	18.6	19.2	19.0	19.7	20.1
12H	18.8	19.4	19.3	19.8	20.3	18.7	19.2	19.2	19.7	20.2
12H 4H	17.9	18.7	18.3	19.1	19.5	17.8	18.6	18.2	19.0	19.4
6H	18.5	19.2	19.0	19.6	20.1	18.4	19.1	18.9	19.5	20.0
8H	18.8	19.3	19.3	19.8	20.3	18.6	19.2	19.1	19.7	20.1

Variations with the observer position at spacings:

S = 1.0H	+ 0.2 / - 0.2	+ 0.2 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 1032 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.1$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Sergio Carneros
Test Date:May 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	45	38	32
0.80	67	55	48	66	55	48	64	54	48	41
1.00	76	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	72	65	79	70	64	56
1.50	88	78	71	86	77	70	83	75	69	62
2.00	95	86	80	93	85	79	89	83	77	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	95	90	100	94	89	96	91	86	78
4.00	106	100	96	104	99	94	100	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Sergio Carneros
 Test Date:May 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:37%
 Test Distance:8.200m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

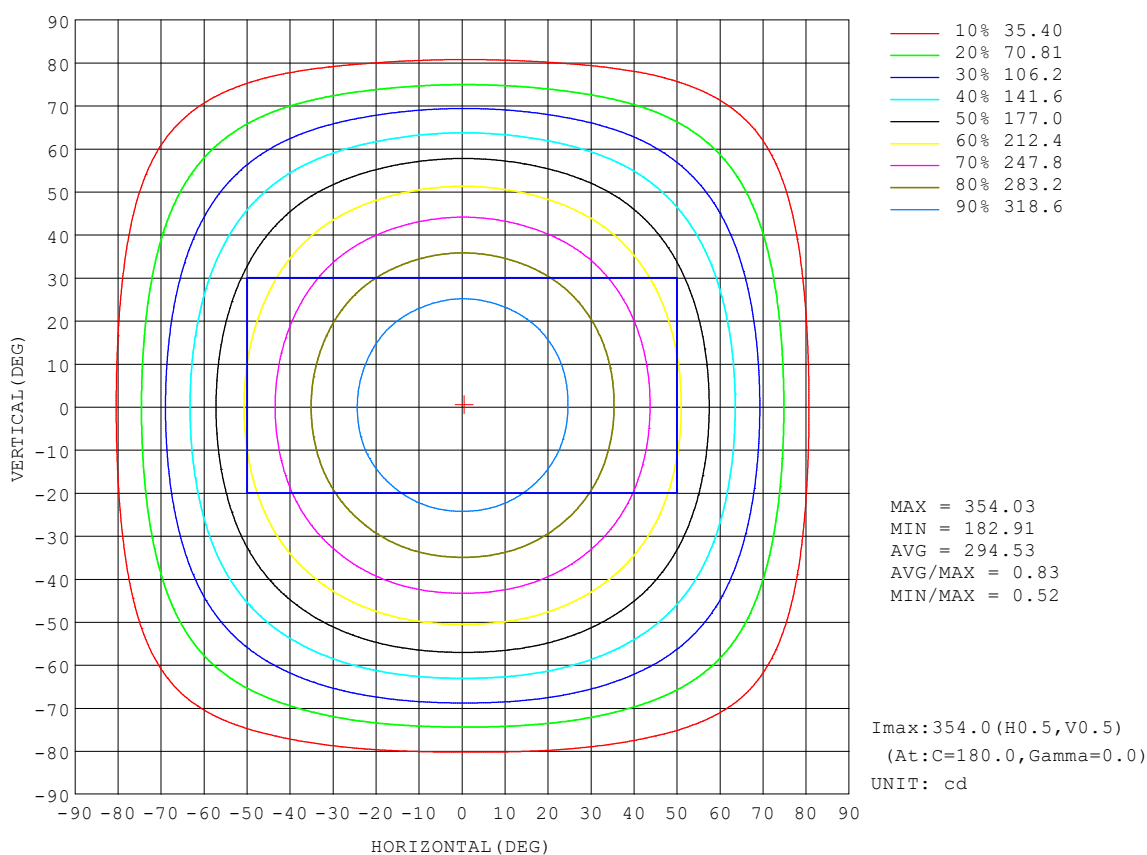


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Sergio Carneros
Test Date:May 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

AAI Figure

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

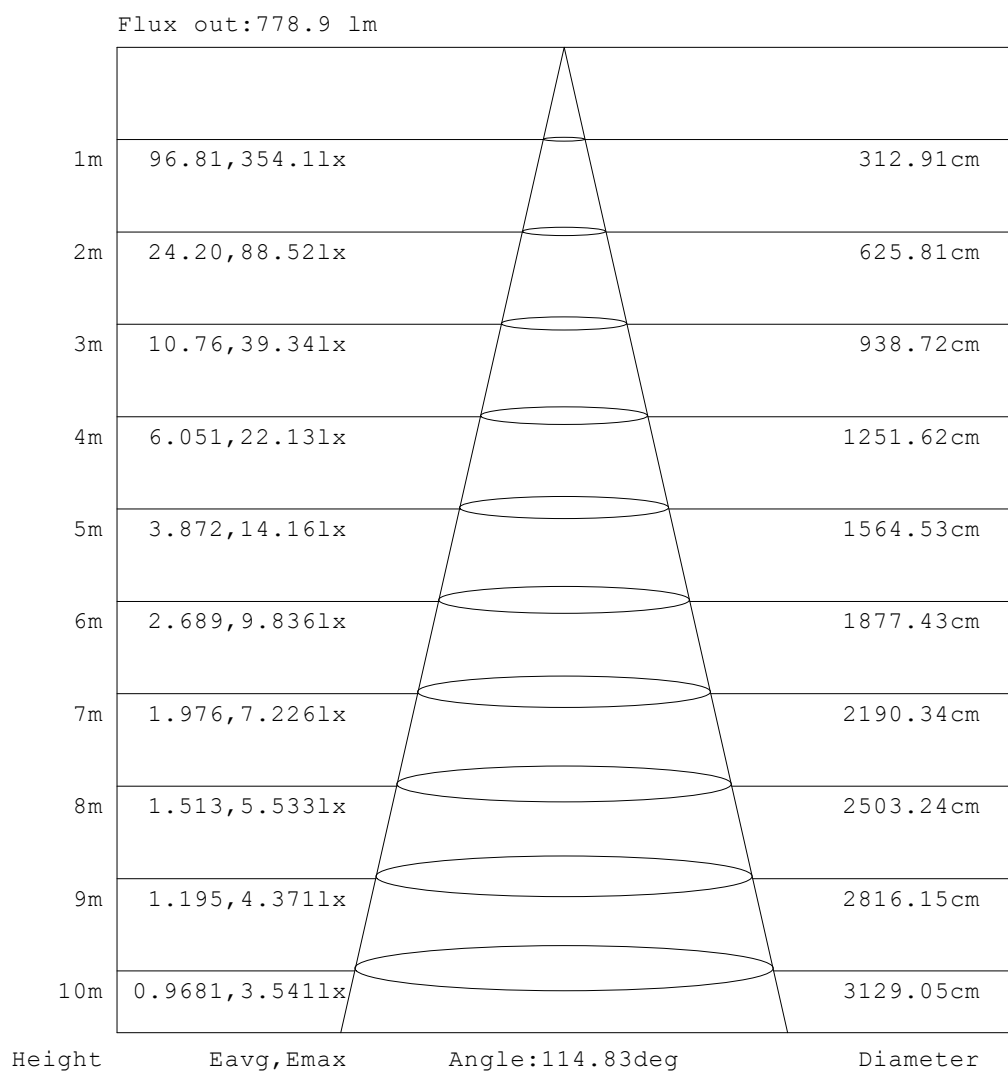


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Sergio Carneros
Test Date: May 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

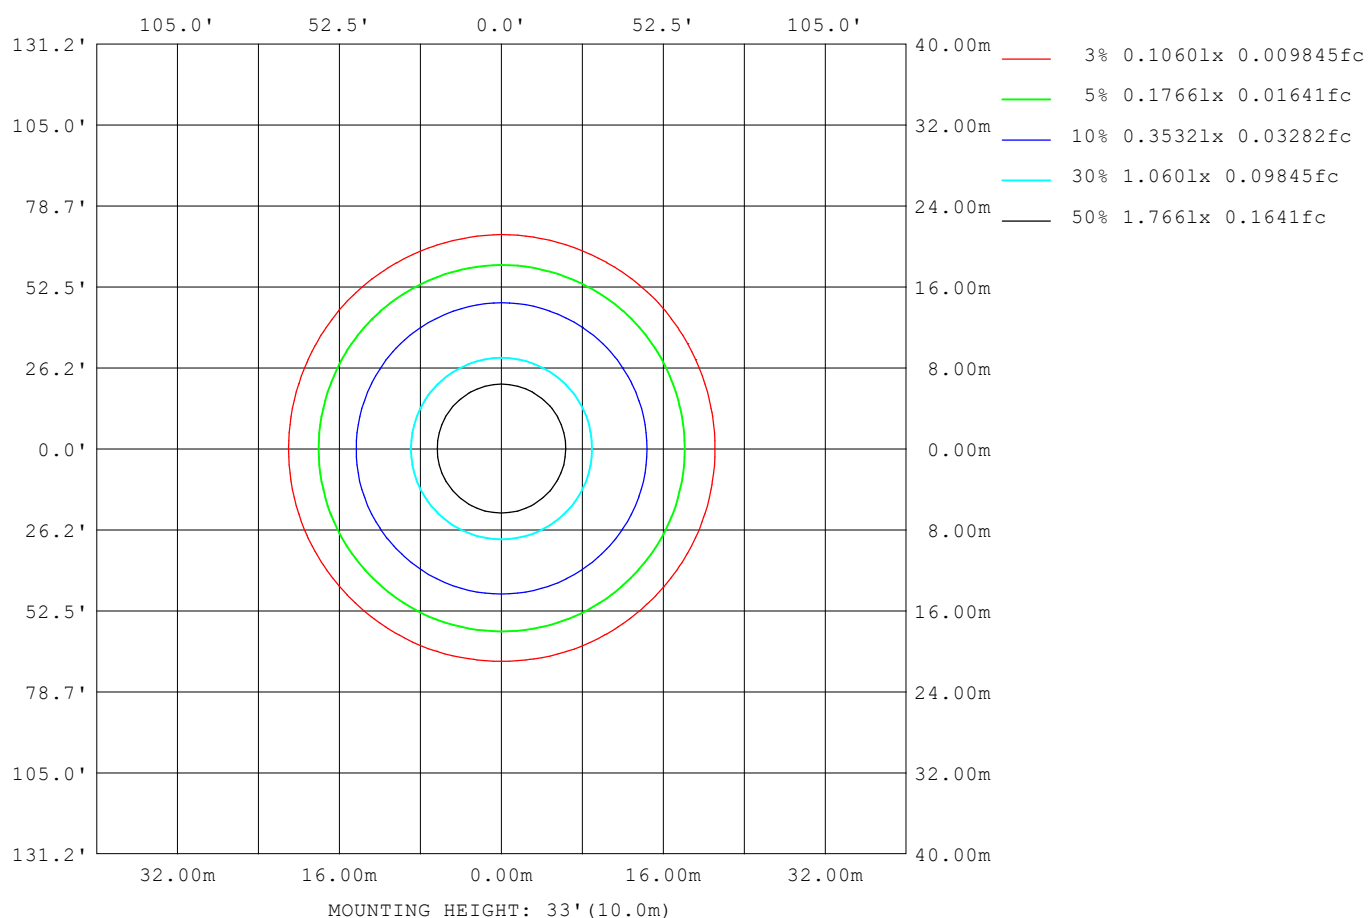

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Sergio Carneros
Test Date:May 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1561
L_0~180 (75) av	1333
L_0~180 (85) av	759
L_90~270 (65) av	1559
L_90~270 (75) av	1327
L_90~270 (85) av	747
L_45 (65) av	1561
L_45 (75) av	1332
L_45 (85) av	761

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Sergio Carneros
Test Date:May 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

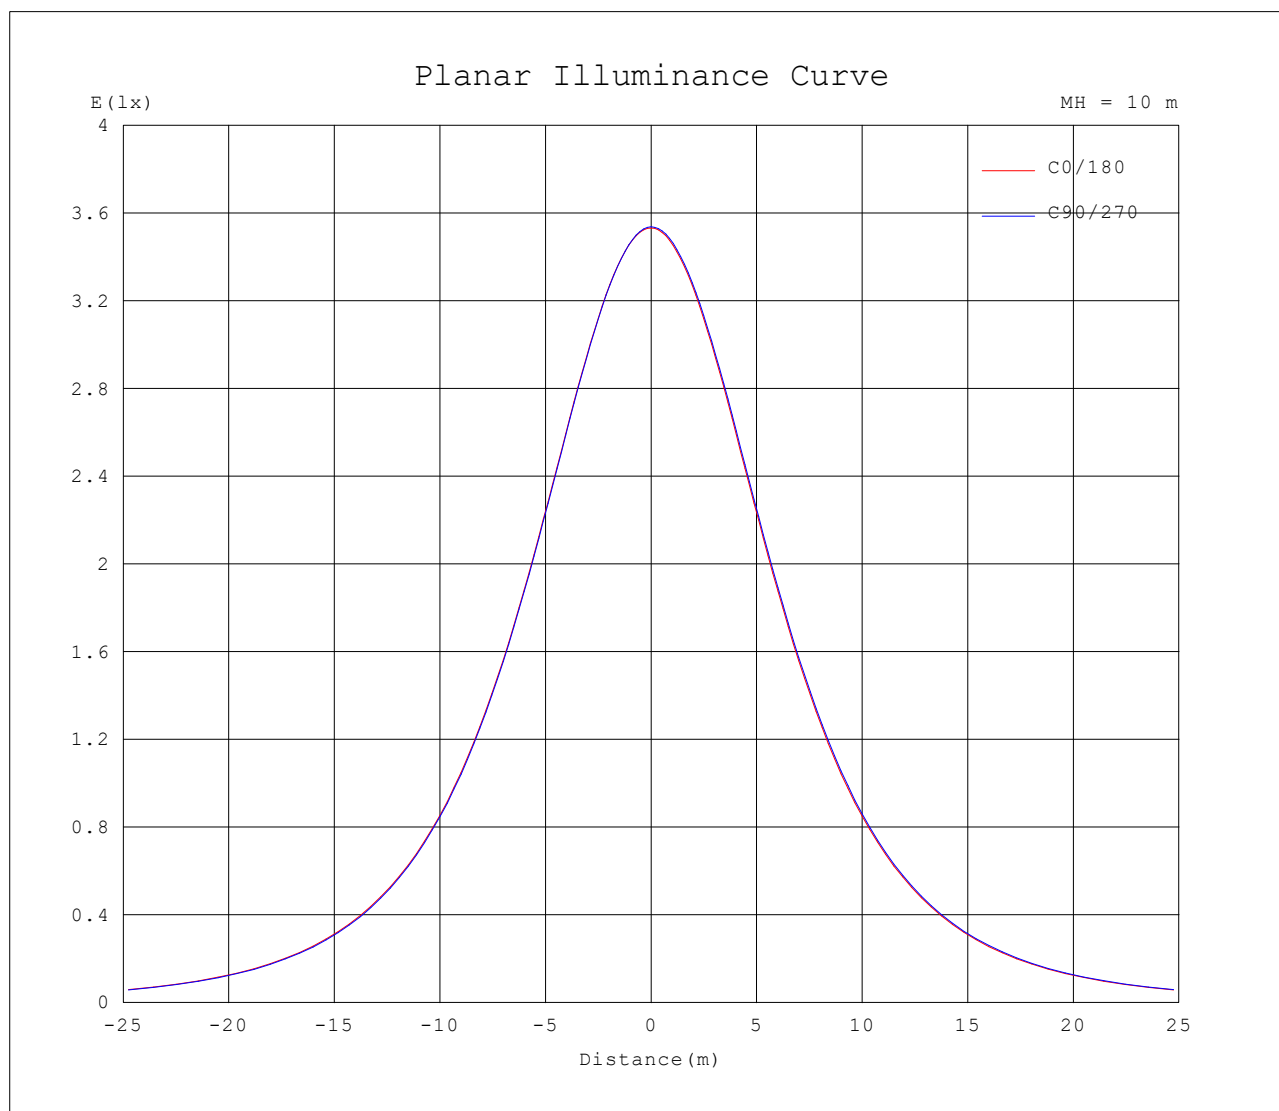

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Sergio Carneros
Test Date: May 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Sevilla	TYPE:2700k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x3x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	354	354	354	354	354	354	354	354	354	354	354	354	354	354	354	354			
5	352	352	352	352	352	352	352	352	352	352	352	352	352	352	352	352			
10	348	348	348	347	347	347	347	347	348	348	348	348	348	348	348	348			
15	341	341	340	340	340	340	340	340	340	340	341	341	341	341	341	341			
20	331	331	330	330	329	330	329	330	330	330	331	331	332	331	332	331			
25	318	318	317	317	316	317	316	317	317	317	318	318	319	319	319	318			
30	303	303	302	302	301	301	301	301	302	302	303	303	304	304	304	303			
35	285	285	284	284	283	283	283	283	284	284	285	285	286	286	286	285			
40	265	265	264	263	263	263	262	263	263	264	265	265	266	266	266	265			
45	242	242	241	241	240	240	240	240	241	241	243	243	244	243	244	243			
50	218	218	216	216	215	216	215	216	216	216	218	218	219	219	219	218			
55	191	191	190	190	189	189	188	189	190	190	191	191	192	192	193	191			
60	163	163	161	161	160	160	160	161	161	161	163	163	164	164	164	163			
65	133	133	131	131	130	130	130	131	131	131	133	132	134	133	134	133			
70	102	102	100	100	98.7	99.2	98.6	99.6	99.8	99.7	101	101	102	102	103	102			
75	69.9	69.9	68.5	68.3	67.0	67.5	67.0	68.0	68.1	68.0	69.4	69.2	70.3	70.1	70.9	70.0			
80	39.4	39.5	38.1	38.2	36.6	37.2	36.5	37.7	37.8	37.6	38.8	38.7	39.7	39.4	40.3	39.5			
85	13.7	13.9	13.0	13.0	11.9	12.4	12.1	12.7	12.7	12.6	13.5	13.4	14.1	14.0	14.5	13.9			
90	0.76	0.83	0.81	0.85	0.46	0.83	0.76	0.69	0.70	0.73	0.89	0.89	0.49	1.01	1.13	0.95			
95	0.61	0.63	0.59	0.60	0.58	0.57	0.61	0.65	0.74	0.74	0.74	0.69	0.65	0.65	0.67	0.72			
100	0.70	0.71	0.81	0.83	0.76	0.75	0.74	0.72	0.83	0.87	0.93	1.04	0.83	0.83	0.83	0.83			
105	0.88	0.91	1.05	1.18	0.96	0.94	0.93	0.90	1.03	1.18	1.25	1.04	1.04	1.03	1.02	1.02			
110	1.07	1.25	1.38	1.52	1.16	1.14	1.12	1.10	1.24	1.47	1.51	1.25	1.25	1.23	1.22	1.23			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25DEG

Operators:Sergio Carneros

Test Date:May 2021

γ Range: 0 - 110DEG

γ Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400

Humidity:37%

Test Distance:8.200m [K=1.0000]

Remarks: