


LUMINAIRE PHOTOMETRIC TEST REPORT


NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 114.57 lm/W			
MODEL	33.003	I _{max} (cd)	372.3	S/MH (C0/180)	1.26
NOMINAL POWER (W)	20w metro	LOR (%)	100.0	S/MH (C90/270)	1.26
RATED VOLTAGE (V)	24	TOTAL FLUX (lm)	1098.3	η UP, DN (C0-180)	0.1, 51.0
NOMINAL FLUX (lm)	1098.29	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 48.8
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	24	η down (%)	99.8	CIBSE SHR MAX	1.35

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

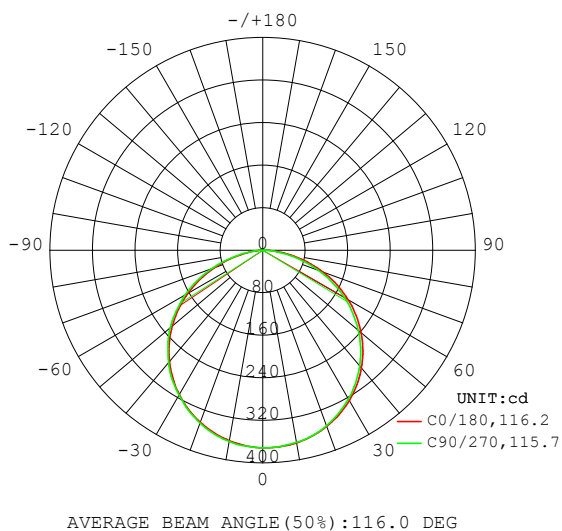

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

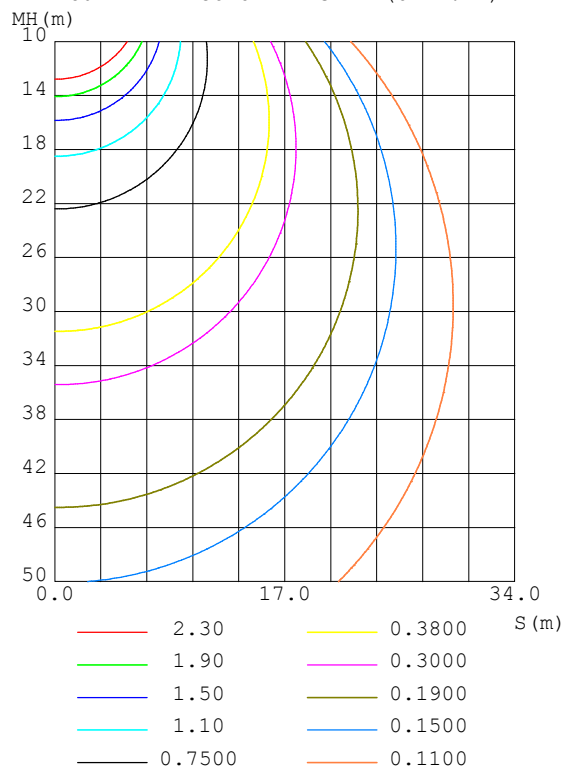

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: February 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	367.7	368.1	366.6	364.8	363.6	363.8	365.1	366.1	0- 10	35.19	35.19	3.2,3.2
20	352.5	353.7	351.1	347.6	344.2	343.1	345.7	348.5	10- 20	101.2	136.4	12.4,12.4
30	326.0	326.4	322.9	318.6	313.8	310.8	315.1	319.6	20- 30	154.4	290.8	26.5,26.5
40	288.8	289.2	283.7	278.6	272.9	269.9	276.0	281.3	30- 40	188.1	479.0	43.6,43.6
50	241.6	240.8	234.8	229.2	222.3	219.7	227.6	234.1	40- 50	198.0	677.0	61.6,61.6
60	185.4	184.1	177.4	170.0	162.7	160.2	168.8	178.0	50- 60	181.4	858.4	78.2,78.2
70	121.4	119.5	111.8	104.0	96.43	96.01	103.6	113.8	60- 70	139.5	997.9	90.9,90.9
80	54.21	51.89	44.66	37.82	31.75	32.71	37.47	44.49	70- 80	78.30	1076	98,98
90	5.560	4.445	1.572	2.436	1.274	0.9965	0.5469	3.397	80- 90	19.47	1096	99.8,99.8
100	0.7069	1.268	0.7623	1.438	1.126	0.9509	0.9173	0.8667	90-100	1.302	1097	99.9,99.9
110	1.100	1.430	1.173	1.702	1.488	1.400	1.362	1.337	100-110	1.273	1098	100,100
120	0	0	0	0	0	0	0	0	110-120	0.0702	1098	100,100
130	0	0	0	0	0	0	0	0	120-130	0	1098	100,100
140	0	0	0	0	0	0	0	0	130-140	0	1098	100,100
150	0	0	0	0	0	0	0	0	140-150	0	1098	100,100
160	0	0	0	0	0	0	0	0	150-160	0	1098	100,100
170	0	0	0	0	0	0	0	0	160-170	0	1098	100,100
180	0	0	0	0	0	0	0	0	170-180	0	1098	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Marçal Huguet
 Test Date:February 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:37%
 Test Distance:8.200m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

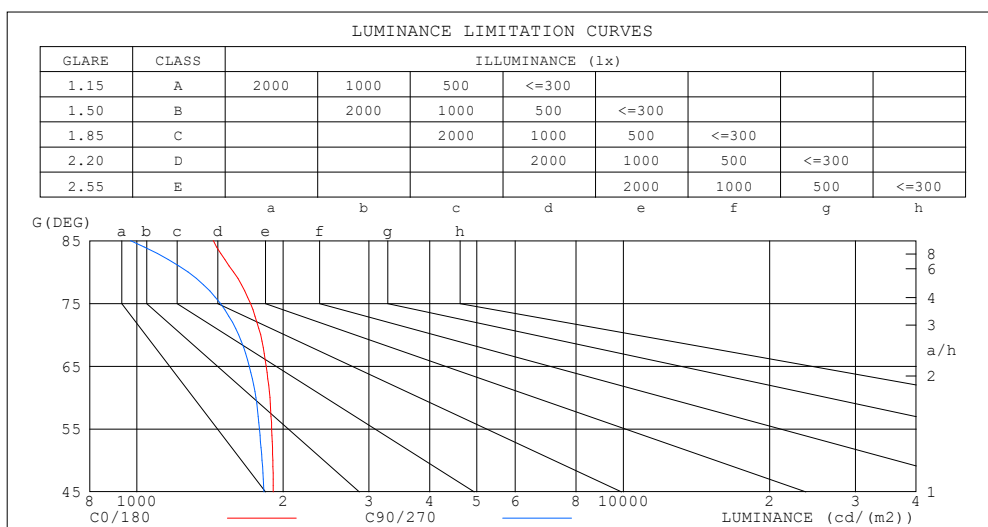

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1436	970
80	1581	1274
75	1713	1486
70	1797	1620
65	1846	1703
60	1878	1758
55	1894	1788
50	1904	1809
45	1908	1826


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:February 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															CU
	Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	.00
1.0	1.04	.99	.96	1.01	.98	.94	.97	.94	.91	.93	.91	.88	.90	.87	.85	.83
2.0	.90	.83	.77	.88	.82	.77	.85	.79	.75	.81	.77	.73	.78	.75	.71	.69
3.0	.79	.71	.64	.77	.70	.64	.74	.68	.62	.72	.66	.61	.69	.64	.60	.58
4.0	.70	.61	.54	.69	.60	.54	.66	.59	.53	.64	.57	.52	.61	.56	.51	.49
5.0	.62	.53	.46	.61	.53	.46	.59	.51	.46	.57	.50	.45	.55	.49	.45	.42
6.0	.56	.47	.40	.55	.46	.40	.53	.46	.40	.51	.45	.39	.50	.44	.39	.37
7.0	.51	.42	.36	.50	.41	.36	.48	.41	.35	.47	.40	.35	.45	.39	.35	.33
8.0	.46	.38	.32	.46	.37	.32	.44	.37	.31	.43	.36	.31	.42	.36	.31	.29
9.0	.42	.34	.29	.42	.34	.28	.41	.33	.28	.40	.33	.28	.38	.32	.28	.26
10.0	.39	.31	.26	.39	.31	.26	.38	.30	.26	.37	.30	.25	.36	.30	.25	.24

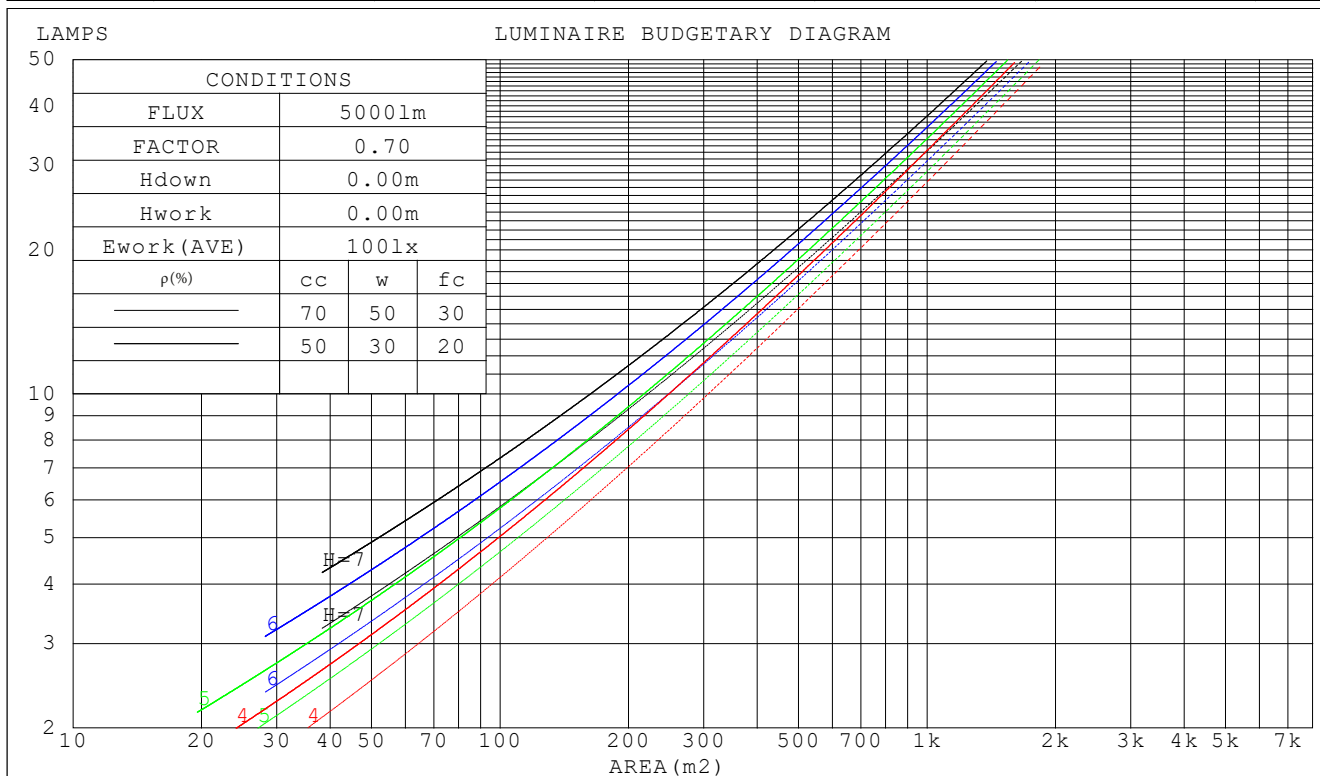

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:February 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

WEC AND CCEC

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fC}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Wall Exitance Coefficients (WEC)															
0.0																
1.0	.311	.177	.056	.304	.173	.055	.291	.167	.053	.278	.160	.051	.267	.155	.050	
2.0	.293	.161	.049	.287	.158	.049	.275	.153	.048	.264	.148	.046	.254	.144	.045	
3.0	.272	.145	.043	.266	.143	.043	.256	.139	.042	.246	.135	.041	.237	.131	.041	
4.0	.251	.130	.038	.246	.129	.038	.237	.125	.037	.228	.122	.037	.220	.119	.036	
5.0	.232	.118	.034	.227	.117	.034	.219	.114	.034	.211	.112	.033	.204	.109	.033	
6.0	.215	.108	.031	.211	.107	.031	.204	.104	.030	.197	.102	.030	.190	.100	.030	
7.0	.200	.099	.028	.196	.098	.028	.190	.096	.028	.184	.094	.027	.178	.092	.027	
8.0	.187	.091	.026	.184	.090	.026	.178	.089	.025	.172	.087	.025	.167	.086	.025	
9.0	.175	.085	.024	.172	.084	.024	.167	.082	.023	.162	.081	.023	.157	.080	.023	
10.0	.164	.079	.022	.162	.078	.022	.157	.077	.022	.153	.076	.022	.148	.075	.021	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_W	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Ceiling Cavity Exitance Coefficients (CCEC)															
0.0	.192	.192	.192	.164	.164	.164	.112	.112	.112	.064	.064	.064	.021	.021	.021	
1.0	.182	.158	.136	.156	.136	.117	.107	.093	.081	.061	.054	.047	.020	.017	.015	
2.0	.174	.134	.100	.149	.115	.086	.102	.080	.060	.059	.046	.035	.019	.015	.011	
3.0	.167	.116	.076	.143	.100	.066	.098	.070	.046	.057	.041	.027	.018	.013	.009	
4.0	.159	.103	.060	.137	.089	.052	.094	.062	.037	.054	.036	.022	.017	.012	.007	
5.0	.152	.093	.049	.130	.080	.042	.090	.056	.030	.052	.033	.018	.017	.011	.006	
6.0	.145	.084	.041	.124	.073	.036	.086	.051	.025	.050	.030	.015	.016	.010	.005	
7.0	.138	.077	.035	.118	.067	.030	.082	.047	.022	.048	.028	.013	.015	.009	.004	
8.0	.131	.072	.030	.113	.062	.027	.078	.044	.019	.045	.026	.011	.015	.008	.004	
9.0	.125	.067	.027	.108	.058	.024	.075	.041	.017	.044	.024	.010	.014	.008	.003	
10.0	.119	.062	.024	.103	.054	.021	.071	.038	.015	.042	.022	.009	.014	.007	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25DEG
 Operators:Marçal Huguet
 Test Date:February 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
 Humidity:37%
 Test Distance:8.200m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

NAME: Sevilla						TYPE:4000k			WEIGHT:N/D		
SPEC.:tira flexible ip20						DIM.: 10x2x500mm			SERIAL No.:N/D		
MFR.: Luz Negra s.l.						SUR.:22			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	2H	15.1	16.6	15.4	16.8	17.1	14.7	16.3	15.0	16.5	16.7
	3H	16.8	18.2	17.1	18.4	18.7	16.3	17.7	16.6	18.0	18.2
	4H	17.5	18.8	17.8	19.1	19.3	16.9	18.3	17.3	18.5	18.8
	6H	18.0	19.3	18.3	19.5	19.8	17.4	18.6	17.7	18.9	19.2
	8H	18.2	19.4	18.5	19.7	20.0	17.5	18.7	17.8	19.0	19.3
	12H	18.3	19.4	18.6	19.7	20.1	17.5	18.7	17.9	19.0	19.3
4H	2H	15.7	17.1	16.0	17.3	17.6	15.4	16.8	15.8	17.0	17.3
	3H	17.6	18.8	18.0	19.1	19.4	17.2	18.4	17.6	18.7	19.0
	4H	18.4	19.5	18.8	19.8	20.2	18.0	19.0	18.3	19.4	19.7
	6H	19.1	20.0	19.5	20.4	20.8	18.5	19.5	18.9	19.8	20.2
	8H	19.3	20.2	19.7	20.6	21.0	18.7	19.5	19.1	19.9	20.3
	12H	19.5	20.3	19.9	20.7	21.1	18.7	19.6	19.2	20.0	20.4
8H	4H	18.7	19.6	19.1	20.0	20.4	18.3	19.2	18.7	19.6	19.9
	6H	19.5	20.3	20.0	20.7	21.1	19.0	19.7	19.4	20.1	20.6
	8H	19.8	20.5	20.3	20.9	21.4	19.2	19.9	19.7	20.3	20.8
	12H	20.1	20.7	20.6	21.1	21.6	19.4	20.0	19.9	20.4	20.9
12H	4H	18.7	19.5	19.2	19.9	20.3	18.3	19.1	18.7	19.5	19.9
	6H	19.6	20.2	20.0	20.7	21.1	19.1	19.7	19.5	20.1	20.6
	8H	19.9	20.5	20.4	21.0	21.4	19.4	19.9	19.8	20.4	20.8
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.2					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.2 / - 0.3					+ 0.1 / - 0.3					

CIE Pub.117, 1098 lm Total Lamp Luminous Flux Correct ($8\log(F/F_0) = 0.3$)

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:February 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	57	45	38	56	45	38	55	44	38	31
0.80	67	55	48	66	55	48	64	54	47	40
1.00	75	64	57	74	64	57	72	65	56	49
1.25	83	72	65	81	71	64	78	70	64	56
1.50	88	78	71	86	77	70	83	75	69	61
2.00	95	86	79	93	85	79	89	82	77	69
2.50	99	91	85	97	89	84	93	87	82	73
3.00	102	95	89	100	93	88	96	91	86	78
4.00	106	100	96	104	99	94	99	95	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF (total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:February 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

ISOCANDELA DIAGRAM

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

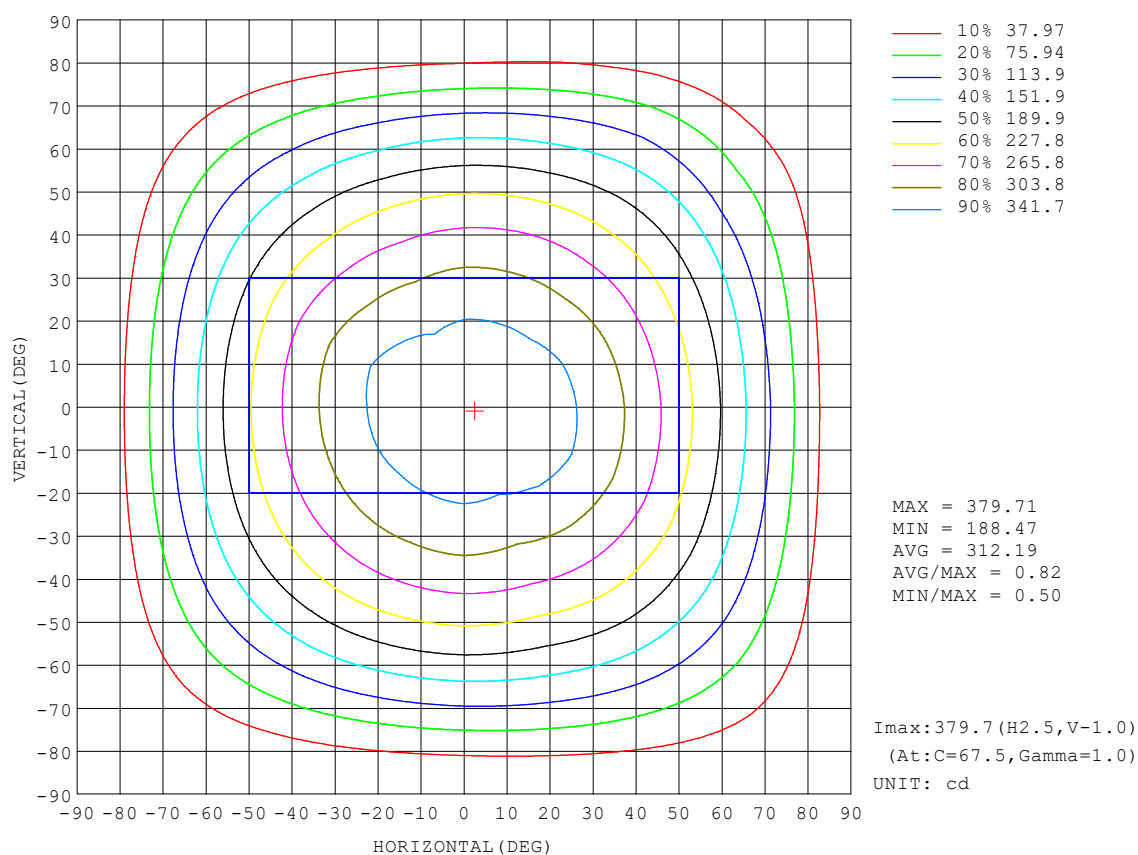


C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:February 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

AAI Figure

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

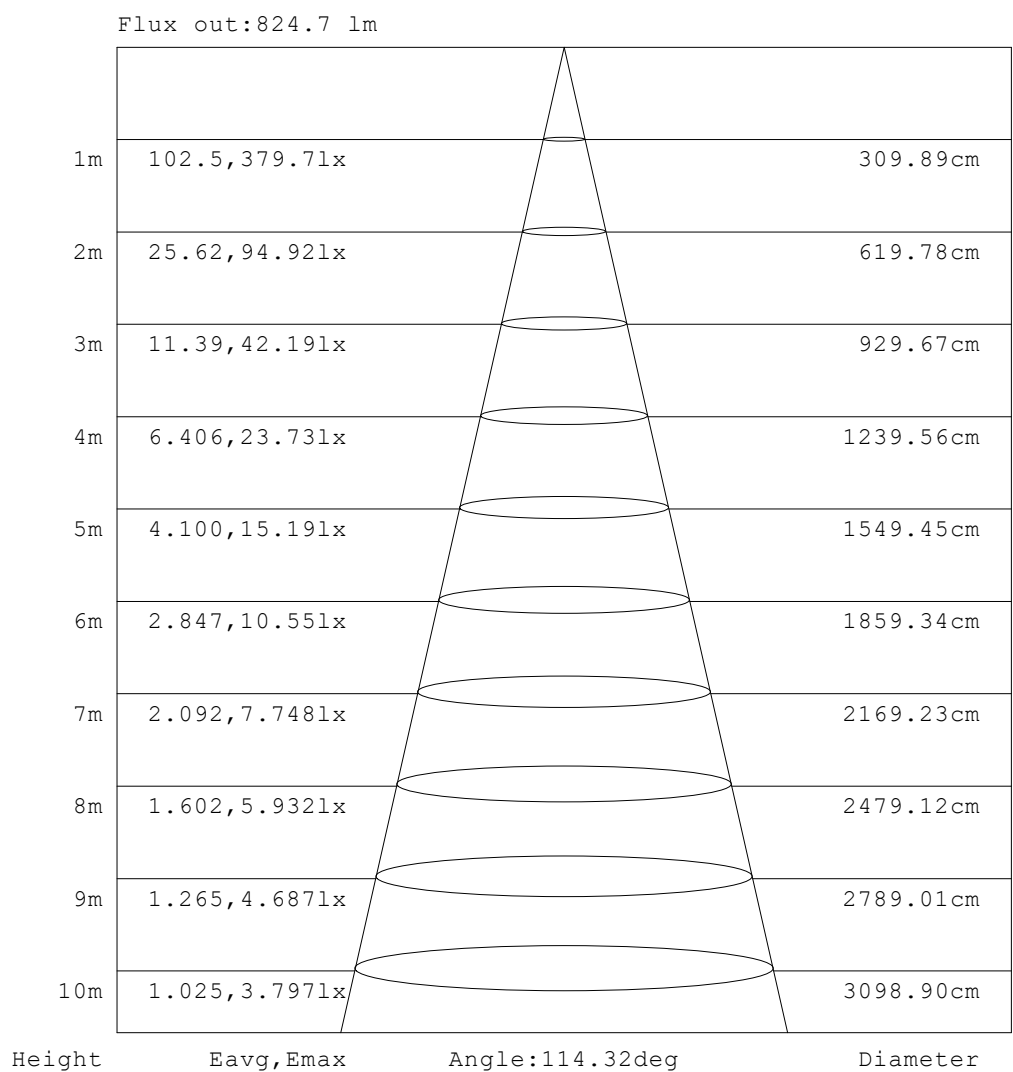


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: February 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

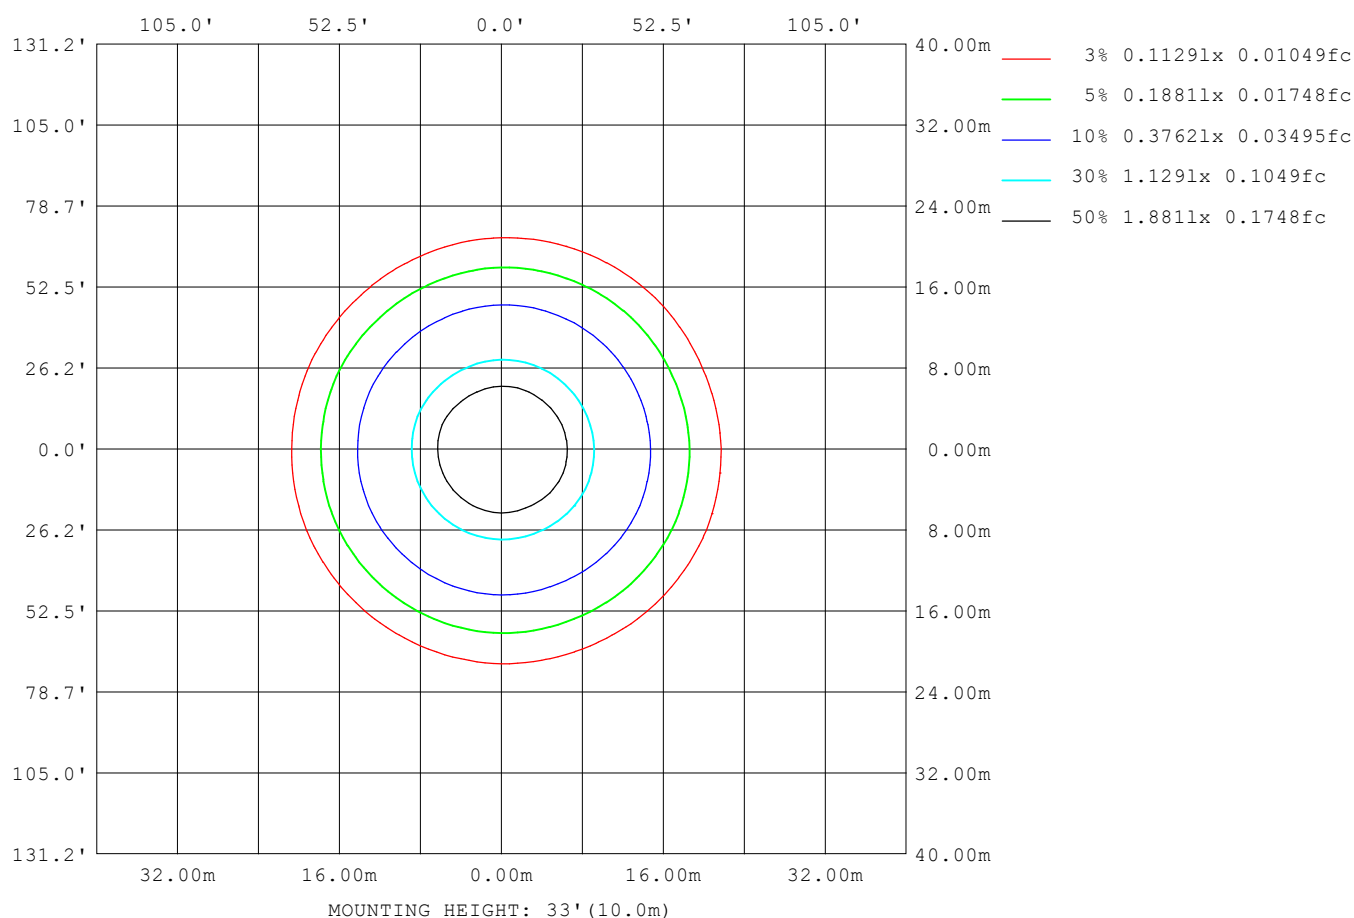

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:February 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

LED Avg.L Report

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	1681
L_0~180 (75) av	1451
L_0~180 (85) av	973
L_90~270 (65) av	1666
L_90~270 (75) av	1424
L_90~270 (85) av	828
L_45 (65) av	1672
L_45 (75) av	1443
L_45 (85) av	890

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25DEG
Operators:Marçal Huguet
Test Date:February 2021

γ Range: 0 - 110DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity:37%
Test Distance:8.200m [K=1.0000]
Remarks:

Planar Illuminance Curve

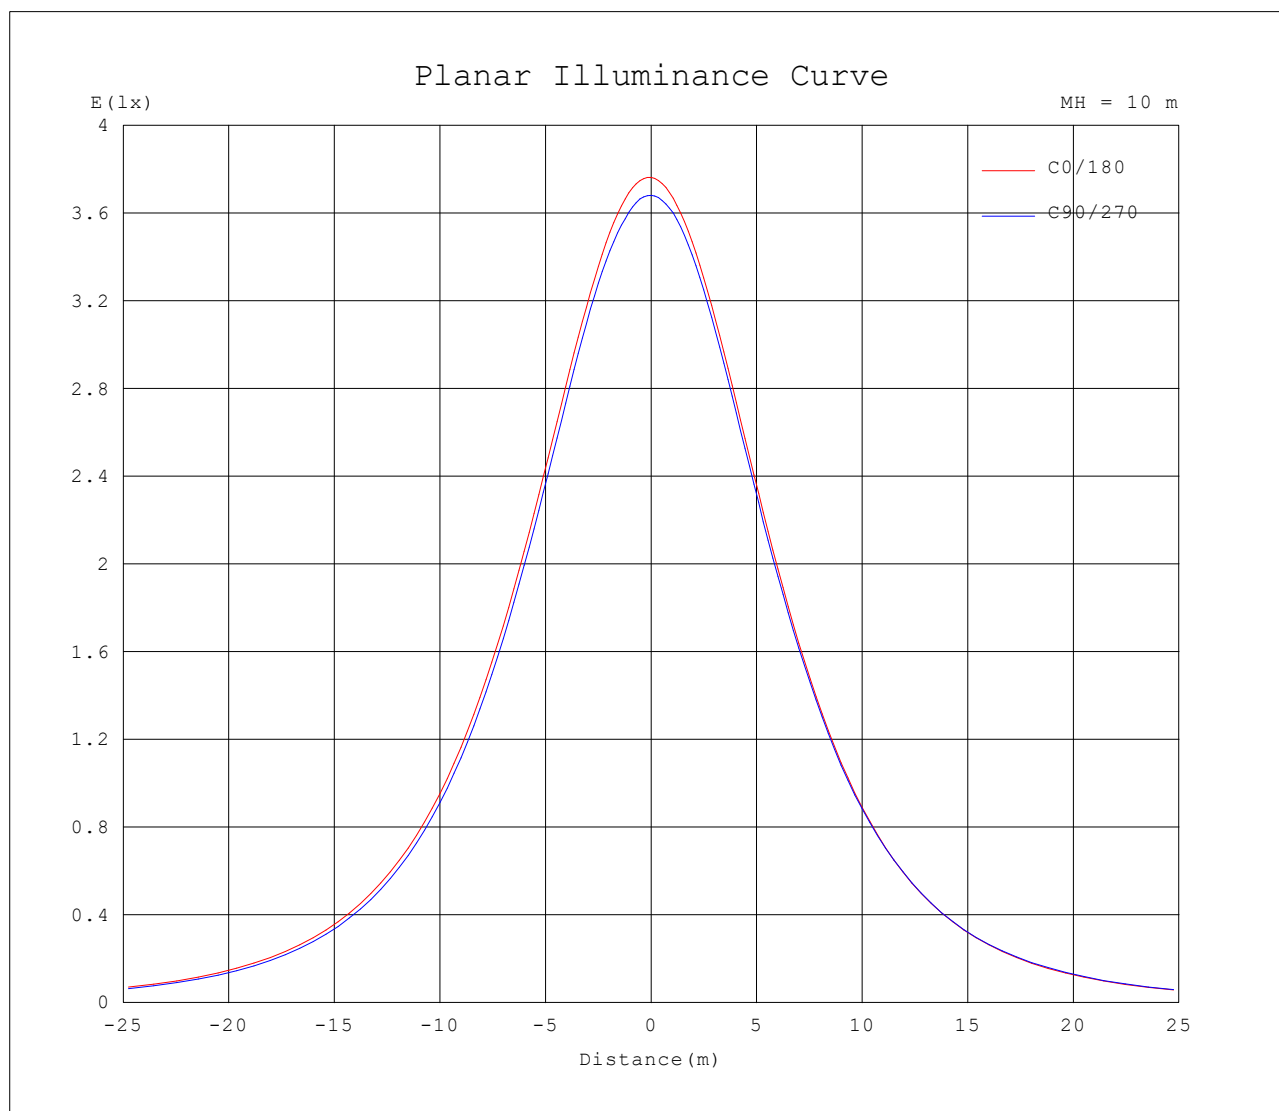

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25DEG
Operators: Marçal Huguet
Test Date: February 2021

γ Range: 0 - 110DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.400
Humidity: 37%
Test Distance: 8.200m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

NAME: Sevilla	TYPE:4000k	WEIGHT:N/D
SPEC.:tira flexible ip20	DIM.: 10x2x500mm	SERIAL No.:N/D
MFR.: Luz Negra s.l.	SUR.:22	Shielding Angle:

Table--1

UNIT: cd

C (DEG) Y (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	371	371	371	371	371	371	371	371	371	371	371	371	371	371	371	371			
5	371	371	371	371	370	369	369	369	369	369	369	371	370	370	370	371			
10	368	368	368	370	367	364	365	364	364	364	364	365	365	365	366	367			
15	361	361	362	363	361	358	358	355	355	355	355	357	357	357	359	360			
20	353	352	354	355	351	348	348	344	344	344	343	345	346	346	349	351			
25	341	340	341	340	338	335	335	330	330	330	328	332	332	332	335	338			
30	326	326	326	325	323	319	319	314	314	313	311	315	315	316	320	323			
35	309	309	309	308	305	300	300	295	295	294	291	297	297	298	301	305			
40	289	289	289	288	284	280	279	274	273	272	270	275	276	278	281	284			
45	266	266	266	265	261	257	255	251	249	247	246	252	252	255	259	261			
50	242	242	241	238	235	231	229	225	222	220	220	227	228	230	234	236			
55	215	215	214	211	207	203	201	197	194	191	191	197	198	201	207	209			
60	185	185	184	181	177	173	170	166	163	161	160	166	169	172	178	180			
65	154	154	153	150	145	140	138	134	130	129	128	134	136	141	147	147			
70	121	121	120	117	112	107	104	101	96.4	95.2	96.0	100.0	104	108	114	107			
75	87.5	87.4	85.4	83.1	77.6	73.1	69.9	67.0	62.7	61.8	63.5	66.8	69.8	75.1	80.0	75.9			
80	54.2	54.2	51.9	49.4	44.7	41.1	37.8	35.7	31.8	31.0	32.7	35.4	37.5	43.3	44.5	42.1			
85	24.7	24.7	22.6	20.4	17.1	14.7	12.7	11.7	9.22	8.66	9.49	10.8	11.8	15.3	17.2	21.8			
90	5.56	5.54	4.44	3.38	1.57	2.47	2.44	2.16	1.27	1.03	1.00	0.91	0.55	1.63	3.40	4.36			
95	0.74	0.99	1.14	1.33	0.57	1.48	1.46	1.20	0.98	0.85	0.82	0.76	0.71	0.71	0.68	0.75			
100	0.71	1.00	1.27	1.27	0.76	1.48	1.44	1.23	1.13	0.99	0.95	0.97	0.92	1.13	0.87	0.86			
105	0.89	1.16	1.39	1.07	0.97	1.43	1.58	1.37	1.29	1.19	1.16	1.19	1.13	1.16	1.08	1.07			
110	1.10	1.33	1.43	1.18	1.17	1.41	1.70	1.53	1.49	1.40	1.40	1.40	1.36	1.33	1.34	1.29			
115	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
120	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
125	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
130	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
135	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
140	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
145	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
150	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
155	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
160	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
165	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
170	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
175	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			
180	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00			

C Range: 0 - 360DEG

C Interval: 22.5DEG

Test Speed: HIGH

Temperature:25DEG

Operators:Marçal Huguet

Test Date:February 2021

Y Range: 0 - 110DEG

Y Interval: 1.0DEG

Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.400

Humidity:37%

Test Distance:8.200m [K=1.0000]

Remarks: