

HARMONY XS

Our PROFESSIONAL led profile series for surface applications is manufactured in high purity aluminium and available in silver anodised and lacquered white (on demand, we can offer different anodised and lacquered finishings). This profile can be used for many different purposes, not only surfaces, and also for hanging luminaires or similar where we require a more flexible profile which can adapt to certain bends and irregular shapes. Minimum bending radius must be of 22cm.

Suitable for led strips with a maximum width of 6mm and a power not greater than 20W/m.


In order to obtain a more homogeneous illumination, we recommend combining it with our Cies ecoled strips.

We offer a 2 year guarantee on profiles and covers.

Scale 1:1



Scale 1:2



Aluminium profile

11.032	white lacquered	2m
11.033	silver anodised	2m
11.003	white lacquered	3m
11.004	silver anodised	3m



Plastic endcaps

19.156	white without hole
19.157	white with hole



Profile bending machine

22.031	22cm Ø minimum profile curvature
--------	----------------------------------




Polycarbonate cover

18.163	opal	2m
18.067	opal	3m
18.068	transparent	3m



Clip

20.028	chrome steel
--------	--------------

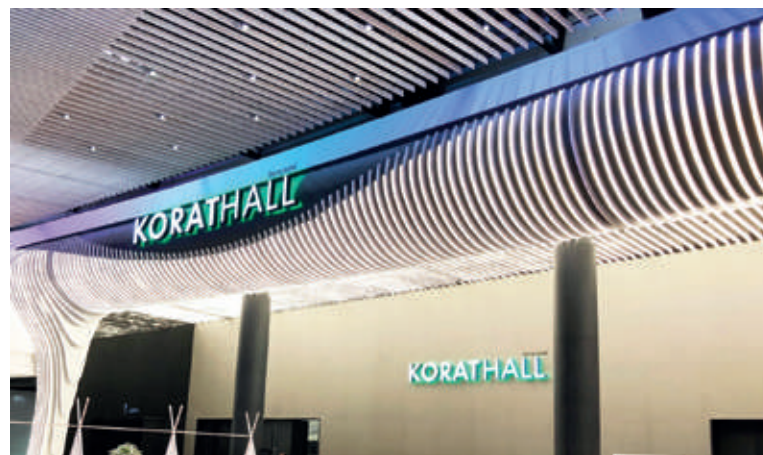

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9
UNE-EN 12020-2 / Theoretical weight: 0.033kg / Alloy: 6063 / Perimeter: 34.3mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)