


Our BASIC led profile series for ceilings and walls is manufactured in high purity aluminium, available in silver anodised. This profile is designed to be used in ceilings or walls, offering an easy, elegant and perimetral lighting. This is perfect for concealing the edges in false ceilings. It is suitable for led strips with a maximum width of 20mm and a power not greater than 40W/m. We recommend using 20mm rigid led strips or ecoled Éite.

**We offer a 2 year guarantee on our profiles and covers.**

Scale 1:1

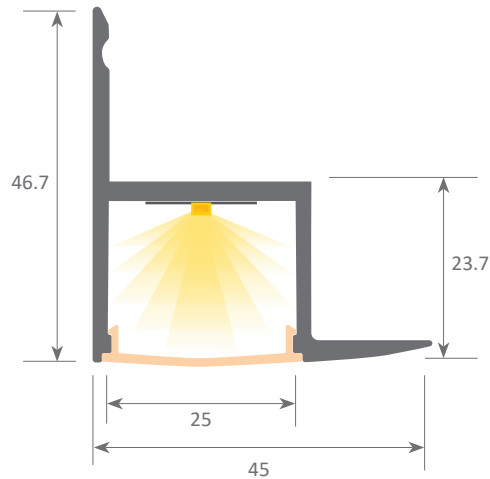



## Aluminium profile

08.008 anodised silver 2m



## Polycarbonate cover

18.060 frosted 2m

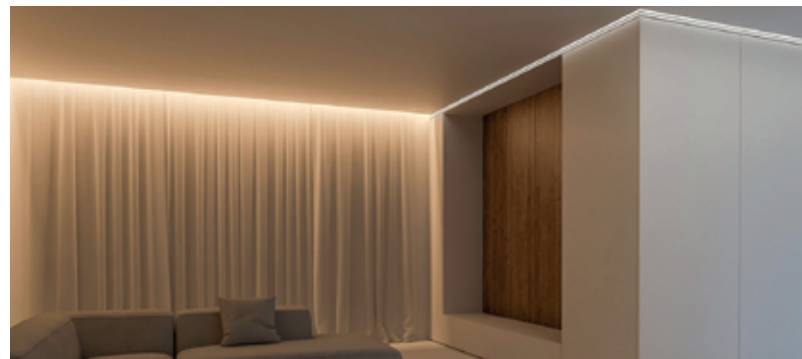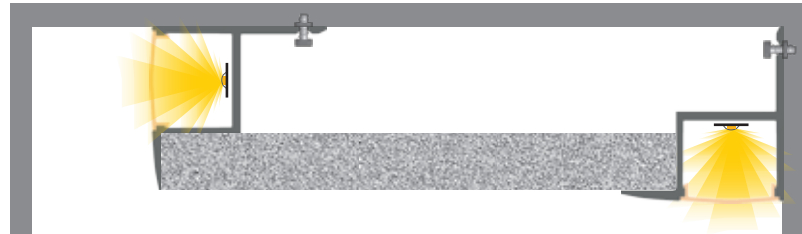

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2  
Theoretical weight: 0.7kg / Alloy: 6063 / Perimeter: 223.30mm / Anodising minimum: 15 microns  
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)