


architectural led profiles





MADEIRA

124



PRAGA

126



BELFAST

127



BUDAPEST

128



KANSAS

129



MONTANA

130



ALASKA

131



PORTLAND

132



BALTIMORE

133

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and is available in raw aluminium. It is ideal for illuminating ceilings and wall surfaces, where the profile is perfectly integrated. These optimum adherence properties are achievable thanks to Madeira's two side trims, which end up entirely covered under the plaster wall's surface once the mounting has been finished. We recommend the use of a metal mesh on our Madeira, in order to strengthen the mounted joints and also to avoid cracks in the future.

It is suitable for led strips with a maximum width of 20mm and a power not greater than 30W/m. In order to obtain a more homogeneous illumination while also improving the dot free effect, we recommend the use of our Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 10 year guarantee on our profiles and covers.


MADEIRA



IP65



Scale 1:1

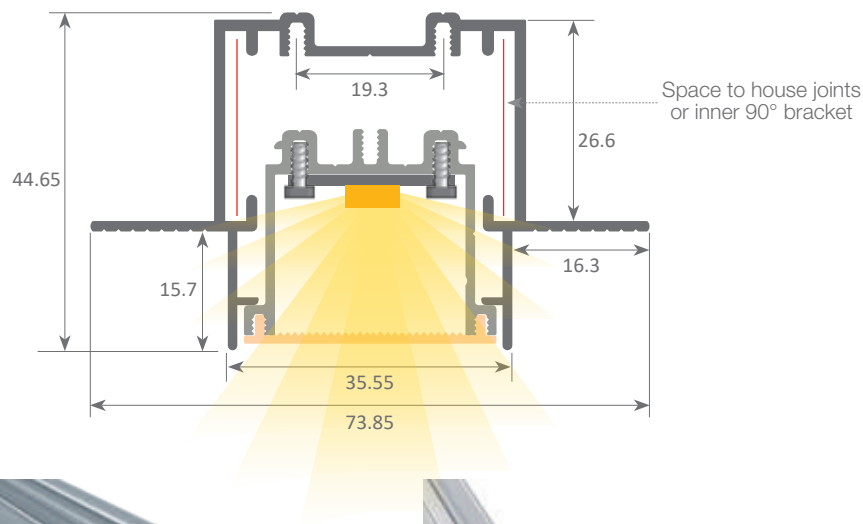

Aluminium profile

08.009 raw

6m




Aluminium tray

15.007 lacquered white 6 m



Aluminium endcaps

19.213 raw

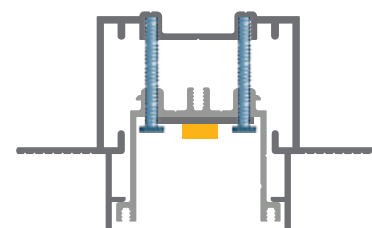

Fixing screws between Madeira tray and profile (Ref: 22.080)



"easy-ON" cover

18.070	"easy-ON" frosted	6m
18.071	transparent micropism	6m
18.072	frosted micropism	6m
18.073	Black&White	6m



90° angle bracket

22.035 aluminium set of 2 units



Flat bracket

22.058 aluminium set of 2 units



Safety cable


22.039 steel 18cm



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.756kg / Alloy: 6063 / Perimeter: 409mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)



Front removable tray system with triple fall protection (safety anchorage)

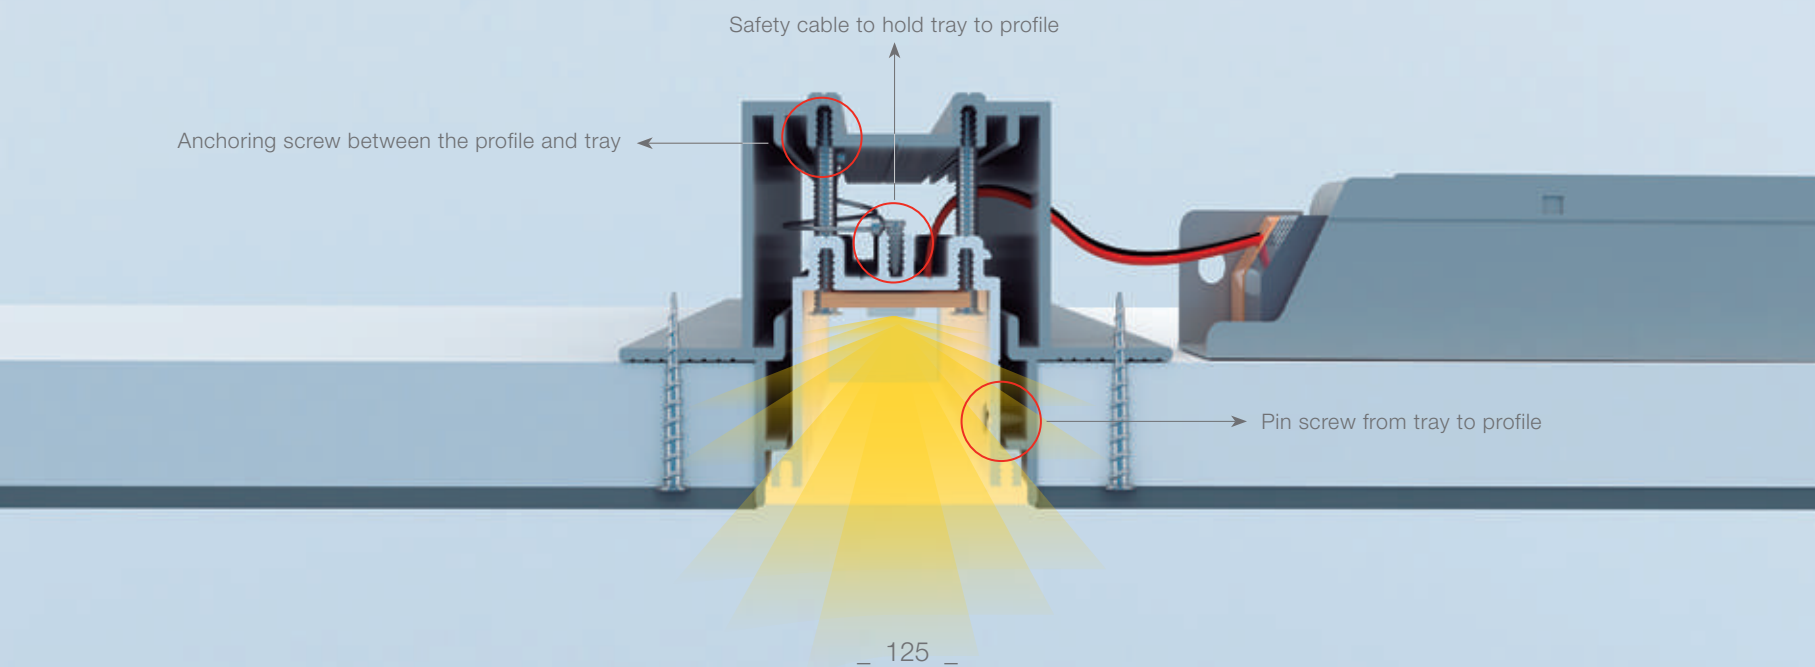



Our PROFESSIONAL led profile series for recessing is manufactured in high purity white lacquered aluminium.

The cover is available in opal white. This profile allows us to house a rigid led strip, achieving high luminosity (specially suitable for supermarkets, shopping centres, etc.).

This profile and its covers are available in 2m lengths.

We offer a 2 year guarantee on our profiles and covers.

Scale 1:1

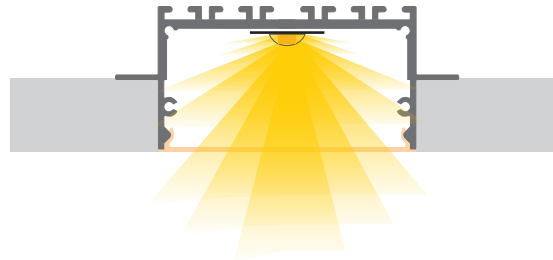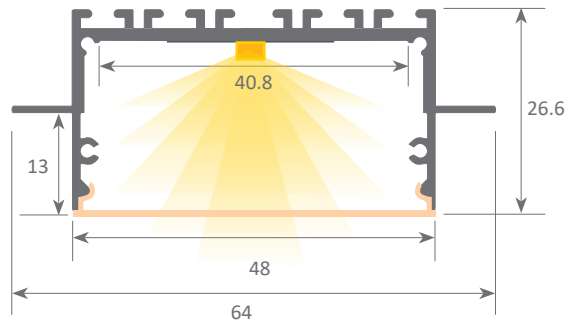

Aluminium profile

08.007 white lacquered 2m




Aluminium endcaps

19.136 without hole



Polycarbonate cover

18.059 opal 2m

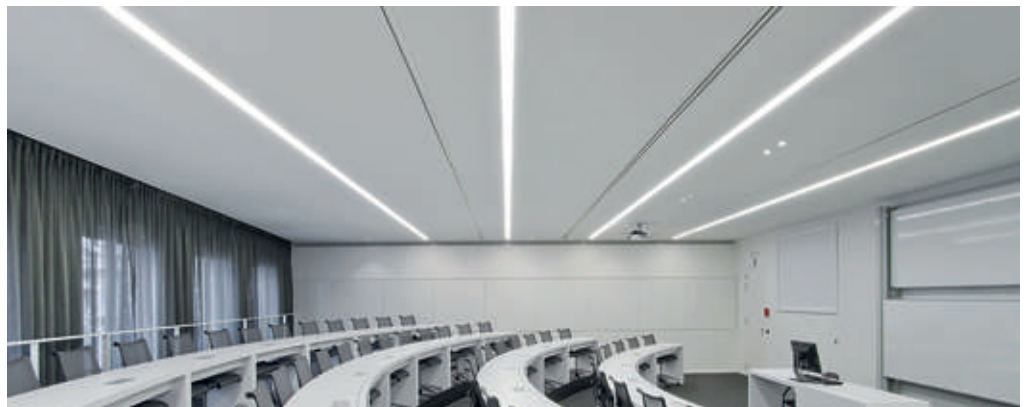

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Alloy: 6060 / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)

Our PROFESSIONAL led profile series for recessing is manufactured in high purity white lacquered aluminium.

The cover is available in opal white. This profile allows us to house a rigid led strip, achieving high luminosity (specially suitable for supermarkets, shopping centres, etc).




This profile and its covers are available in 2m lengths.

We offer a 2 year guarantee on our profiles and covers.

BELFAST



Scale 1:1

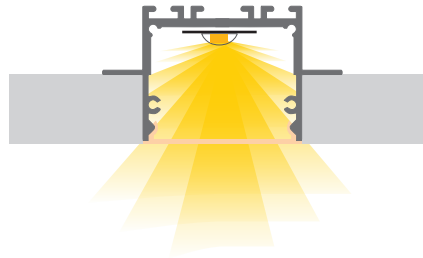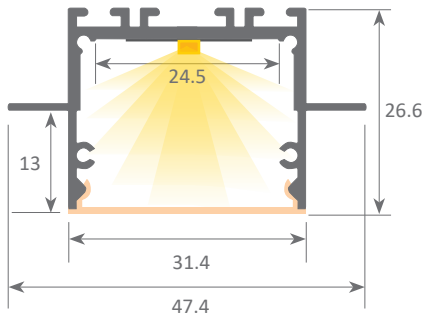

Aluminium profile

08.006 white lacquered 2m




Aluminium endcaps

19.135 without hole



Polycarbonate cover

18.058 opal 2m

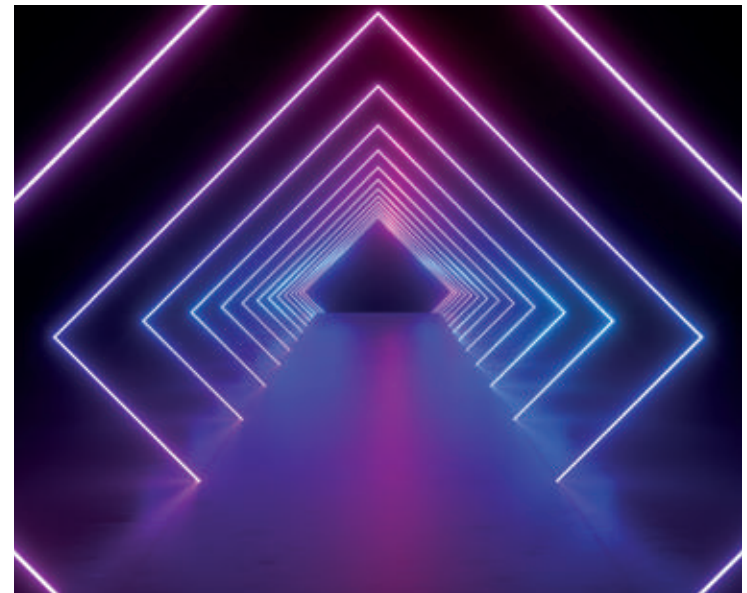

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2

Alloy: 6060 / Anodising minimum: 15 microns

Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)



Our PROFESSIONAL led profile series for recessing is manufactured in high purity white lacquered aluminium.

The cover is available in opal white finishing. This profile allows us to use a flexible led strip with a power not greater than 20W/m. We recommend using ecoled Élite.

Both profile and covers are available in 2m lengths.

We offer a 2 year guarantee on our profiles and covers.

Scale 1:1

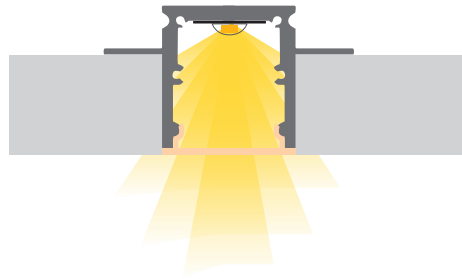

Aluminium profile

08.005 white lacquered 2m



Aluminium endcaps

19.134 white without hole



Polycarbonate cover

18.057 opal 2m




Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Alloy: 6060 / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)


Our BASIC led profile series for ceilings and walls is manufactured in high purity aluminium, available in silver anodised. This profile is designed to be used in ceilings or walls, offering an easy, elegant and perimetral lighting. This is perfect for concealing the edges in false ceilings. It is suitable for led strips with a maximum width of 20mm and a power not greater than 40W/m. We recommend using 20mm rigid led strips or ecoled Éite.

We offer a 2 year guarantee on our profiles and covers.

Scale 1:1

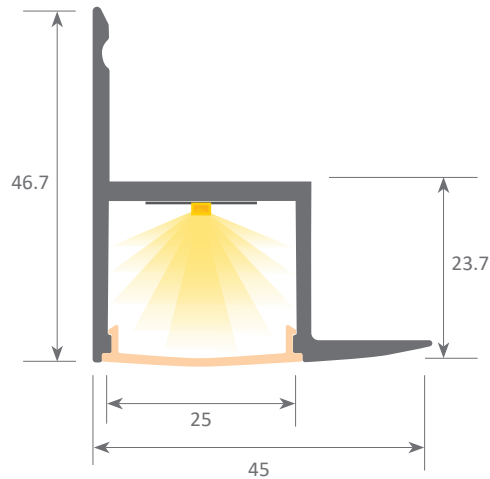

KANSAS

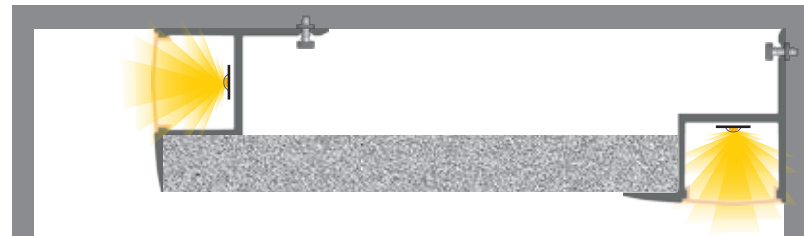


Aluminium profile

08.008 anodised silver 2m



Polycarbonate cover

18.060 frosted 2m

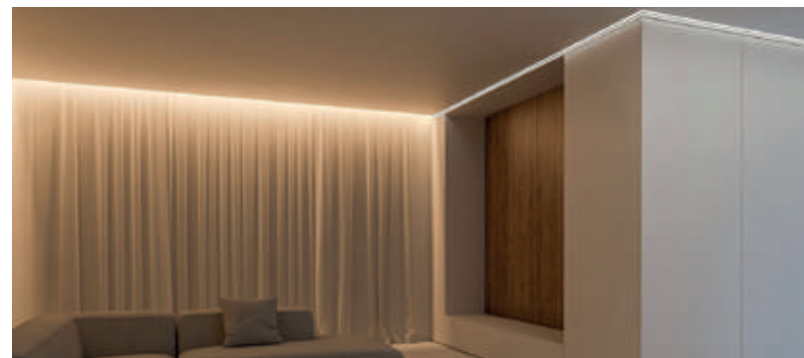

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.7kg / Alloy: 6063 / Perimeter: 223.30mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)



MONTANA

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and is available in silver anodised. It is ideal for illuminating ceilings and wall surfaces, where the profile is perfectly integrated. These optimum adherence properties are achievable thanks to Montana's two perforated side trims, which end up entirely covered under the plaster wall's surface once the mounting has been finished. We recommend the use of a metal mesh on our Montana, in order to strengthen the mounted joints and also to avoid cracks in the future.

It is suitable for led strips with a maximum width of 20mm and a power not greater than 30W/m. In order to obtain a more homogeneous illumination while also improving the dot free effect, we recommend combining it with our Canovelles-Barcelona-Gomera-COB ecoled strips. It can also be combined with our rigid led strips.

We offer a 2 year guarantee on our profiles and covers.

Scale 1:1

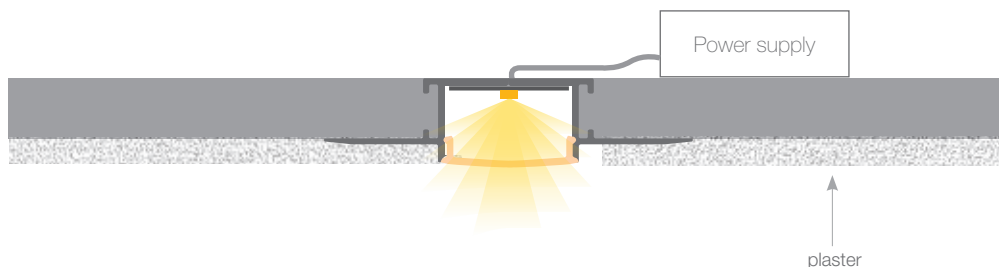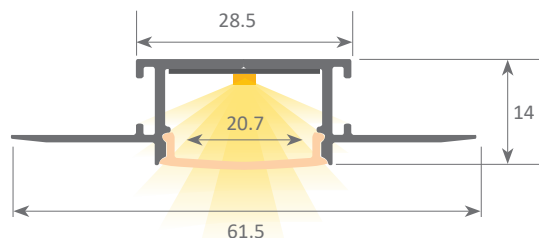

Aluminium profile

08.004 anodised silver 2m




Plastic endcaps

19.132 grey without hole
19.133 grey with hole



Polycarbonate cover

18.056 frosted 2m

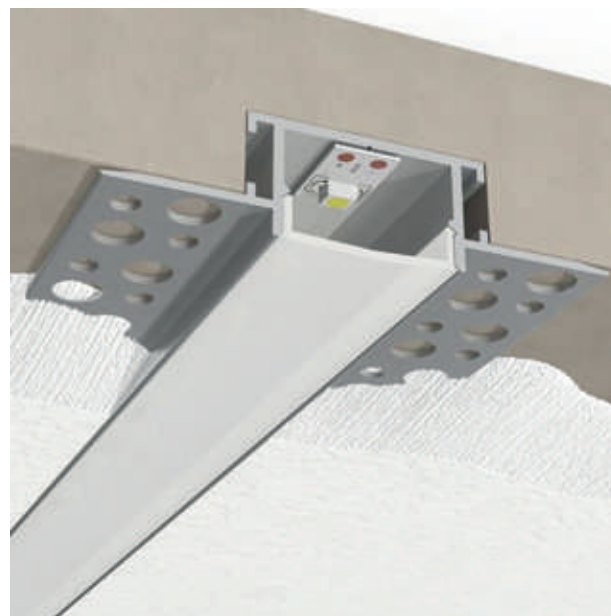

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Alloy: 6063 / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)


ALASKA

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and available in silver anodised. The profile is ideal for illuminating bathrooms, kitchens and similar areas, where it is mounted on tiles, ceramic or stoneware surfaces. Also, due to its perforated L-shaped trim, it is easy to fit the profile into concrete and this way we achieve a perfect adhesion to the wall.

This profile has one trim and can be mounted between two tiles or used as a corner/wall ending. It is suitable for led strips with a maximum width of 12.5mm and a power not greater than 20W/m. In order to obtain a more homogeneous illumination, while also improving the dot free effect, we recommend combining it with our Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 2 year guarantee on our profiles and covers.

Scale 1:1

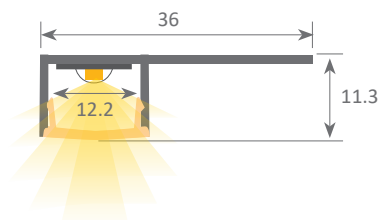


Aluminium profile

08.001 anodised silver 3m



Methacrylate cover

18.014	transparent	2m
18.015	frosted	2m
18.116	frosted	2m
18.018	opal	3m
18.016	transparent	6m
18.017	frosted	6m
18.115	frosted	6m

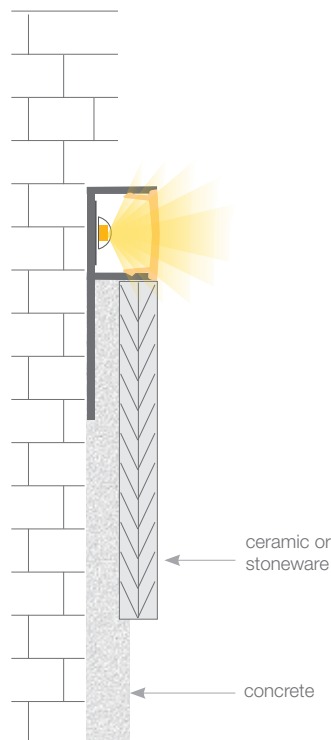

Plastic endcaps

19.126	grey without hole
19.127	grey with hole



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.198kg / Alloy: 6063 / Perimeter: 111.8mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)


PORTLAND

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and available in silver anodised. This profile is ideal for illuminating bathrooms, kitchens and similar areas, where it is mounted on tiles, ceramic or stoneware surfaces. Also, due to its two perforated L-shaped trims, it is easy to fit the profile into concrete in order to achieve a perfect adhesion to the wall. This profile is designed for outer corners.

It is suitable for led strips with a maximum width of 12.5mm and a power not greater than 20W/m. In order to obtain a more homogeneous illumination while also improving the dot free effect, we recommend combining it with our Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 2 year guarantee on our profiles and covers.

Scale 1:1

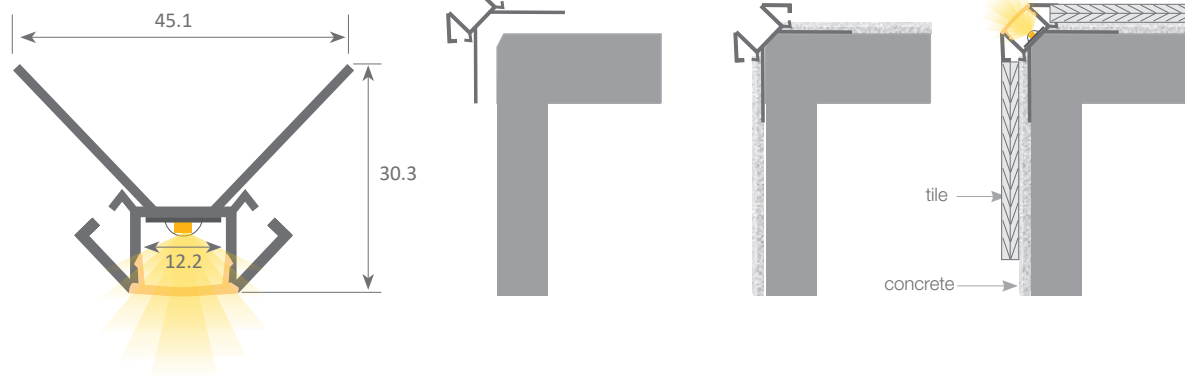

Aluminium profile

08.003 anodised silver 3m



Plastic endcaps

19.130 white without hole
19.131 white with hole



Methacrylate cover

18.014	transparent	2m
18.015	frosted	2m
18.116	frosted	2m
18.018	opal	3m
18.016	transparent	6m
18.017	frosted	6m
18.115	frosted	6m




Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.356kg / Alloy: 6063 / Perimeter: 227.6mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)

BALTIMORE

Our PROFESSIONAL led profile series is manufactured in high purity aluminium and available in silver anodised. This profile is ideal for illuminating bathrooms, kitchens and similar areas, where it is mounted on tiles, ceramic or stoneware surfaces. Also, due to its perforated L-shaped trims, it is easy to fit the profile into concrete in order to achieve a perfect adhesion to the wall. This profile is designed for inner corners.

It is suitable for led strips with a maximum width of 12.5mm and a power not greater than 20W/m. In order to obtain a more homogeneous illumination while also improving the dot free effect, we recommend combining it with our Canovelles-Barcelona-Gomera-COB ecoled strips.

We offer a 2 year guarantee on our profiles and covers.

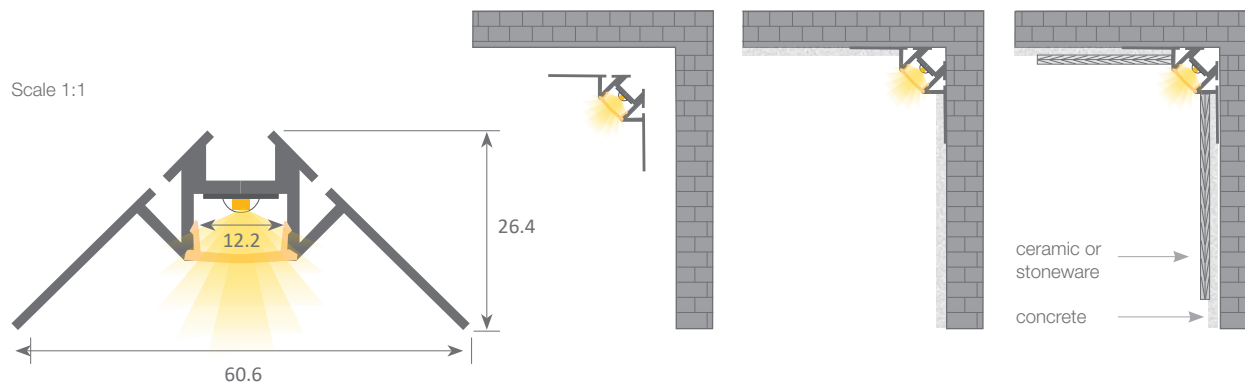

Aluminium profile

08.002 anodised silver 3m



Plastic endcaps

19.128 white without hole
19.129 white with hole



Methacrylate cover

18.014 transparent 2m
18.015 frosted 2m
18.116 frosted 2m
18.018 opal 3m
18.016 transparent 6m
18.017 frosted 6m
18.115 frosted 6m



Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2
Theoretical weight: 0.423kg / Alloy: 6063 / Perimeter: 238.7mm / Anodising minimum: 15 microns
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: methacrylate (greater protection against UV rays)