
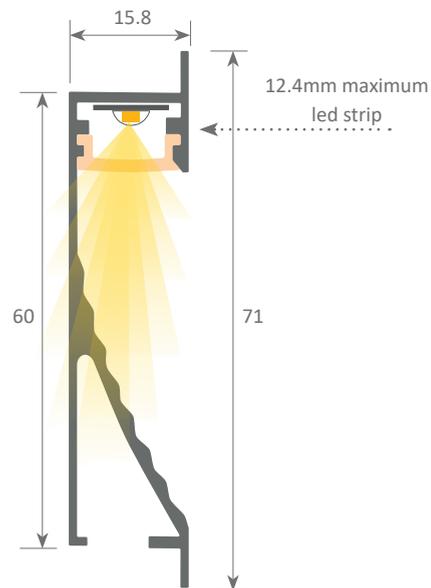


Our BASIC led profile series is manufactured in high purity aluminium and available in anodised silver and white lacquered. It is ideal for indirect lighting in walls and ceilings. It can be integrated into the wall, plasterboard or wooden panels to indirectly light upwards or downwards. Suitable for led trips with a maximum width of 12mm and a power not greater than 20W/m. We recommend combining it with COB our Elite ecoled strip in order to achieve an homogeneous illumination, while also improving the dot free effect.

**Garantie de 2 ans sur profil et diffuseur.**

## ATLANTA SLIM

Scale 1:1



### Aluminium profile

09.068	anodised silver	2m
09.069	white lacquered	2m
09.002	anodised silver	3m
09.009	white lacquered	3m




### Plastic endcaps

19.138	white left (with hole)	set of 2 pieces
	white right (without hole)	
19.453	grey left (with hole)	set of 2 pieces
	grey right (without hole)	



### Polycarbonate cover

18.156	opal	2m
18.062	opal	3m

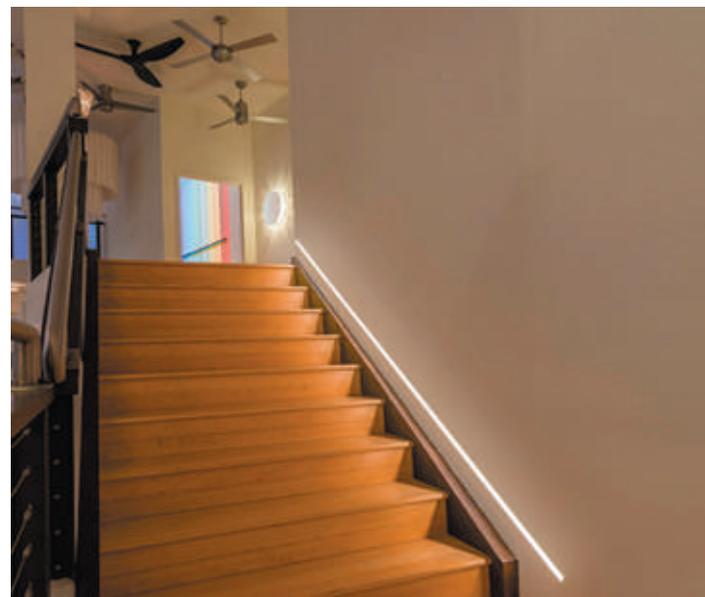

Aluminium alloy extrusion process in accordance with: ISO 9001:2008 - ISO 14001 / Tolerances defined by: UNE-EN 755-9 / UNE-EN 12020-2  
Theoretical weight: 0.380kg / Alloy: 6063 / Perimeter: 265mm / Anodising minimum: 15 microns  
Aluminium purity: 95-98% / Material treatment: T-5 / Covers: Fireproof V0