

Features:

- Silky, soft-touch silicone neon, with opaline front and integrated light source.
- Great for lighting up cornices and for creating decorative perimeter lighting, large letters and advertising texts, etc...
- Degree of protection: IP67
- Uses high quality silica gel and is resistant to yellowing, UV rays, saltpeter, high temperatures and is also flame retardant.
- Neon with frontal light emission.



Reference	Colour temp.	Lumens/m	Lumens/W
10.243	RGB	314	25

Technical characteristics

Technical data	
Power (per metre)	12W/m
Power (full 5m roll)	360W
Voltage	24V
Degree of protection	IP67
Led information	
Number of leds per metre	120
Temperatures and operating conditions	
Working tempetarure	-40°C / +55°C
Storage temperature	-40°C / +60°C
· · · · · · · · · · · · · · · · · · ·	

Photometric data

Aspects

Dimr	mable	Yes *	
Insta	llation	Surface / Recessed	
Apt f	or	Indoor / Outdoor	

^{*1} Adjustable with appropriate controllers.

Useful lifespan

Estimated lifespan	30.000h *²
Daily recommended use	18h

^{*2} Depending on the dissipation of the profile, the daily working hours and the external environmental working temperature.
























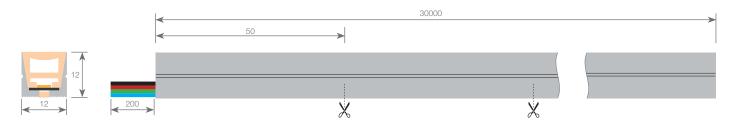


Dimensions and weight

Length	30000mm	Cutting section length	50mm
Width	12mm	Cable length	200mm
Height	12mm	Cable section	4x0,5mm²


Connection

Maximum connection in open circuit	10m	Maximum connection in closed circuit	20m

Photometric curves




Curve diameter

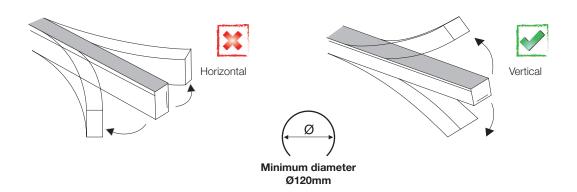



Fixing



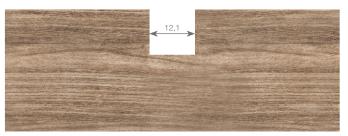

Compatible accessories



Clip profile10.254 1m white aluminium



Die-cut profile 10.253 1m steel



19.491 frosted19.490 frosted with side cable hole19.489 frosted with front cable hole

Silicone endcaps



Aluminium clip 20.083 white



Silicone for waterproofing
22.138 45ml opal
22.140 45ml transparent



Assembly instructions with clip profile or clip

