

## SEQUENCER VIA WIFI RGB+W

Ref: 41.029

12V -24V

A very small non-waterproof sequencer offering IP25, which permits multiple modes and effects.

It is controlled by means of a smartphone or a tablet with operative systems IOS (Apple), version 6.0 or Android, version 2.2 upwards. The application "Dream Color" (or similar) can be downloaded free.

It is supplied with an installation manual and a static IP in order to be able to connect via wifi.

Download from the web:


<http://www.leddreamlight.com/Download1.html>

Once done Install with the QR code



Assign the address indicated in the manual (static IP) and open the program to control the installation.

It allows you to choose different scenarios: rooms, bathrooms, living room ... etc.

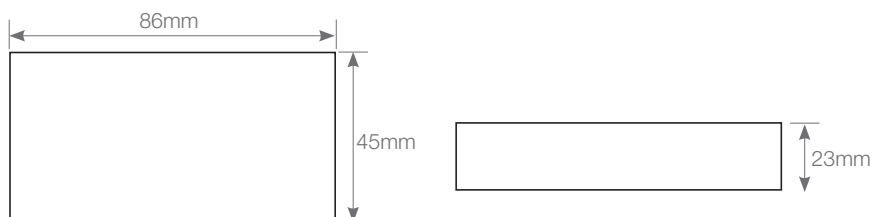

Power (W)	192W (12V)
Power (W)	384W (24V)
Channels (output)	4
Amps	4A x channels
Signal detection distance	20 m
Weight	52g
Measurements	86x45x23mm
Memory	yes
Waterproofing	IP25
Packaging	1 unit
Guarantee	2 years

Aprobado por:  